


HPRC2460 for Sony FX2 Cinema Line

S-FX2-2460-01



- 1** Sony FX2 Cinema Line with XLR Handle Unit
- 2** Cables/Miscellaneous
- 3** Lenses
- 4** NP-F100 Battery
- 5** HPRC 1100 CFEBLB
- 6** BC-QZ1 Battery Charger

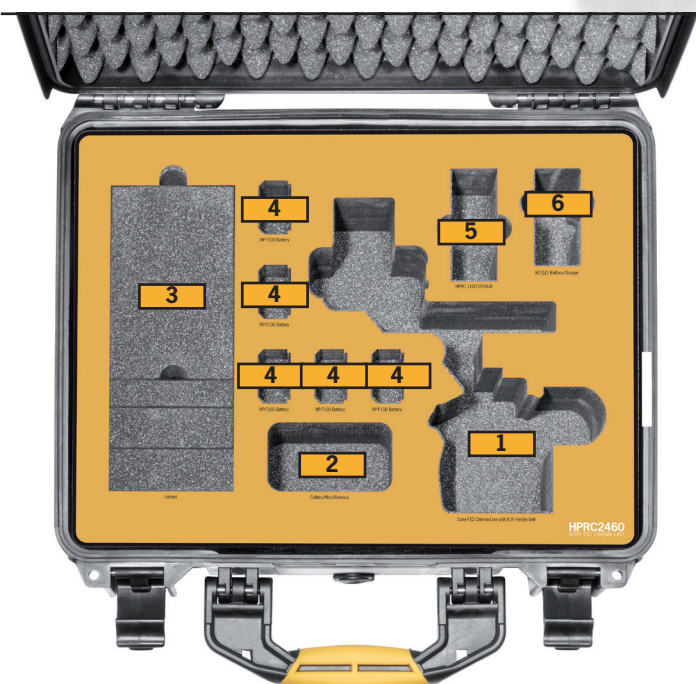

TECHNICAL FEATURES

Dimension:

Internal dimension:
409x306x175(mm) - 16.10x12.05x6.89(in)

External dimension:
435x377,8x193(mm) - 17.13x14.87x7.60(in)

Weight:


2,55kg - 5.62lbs

Temperature rating:

Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

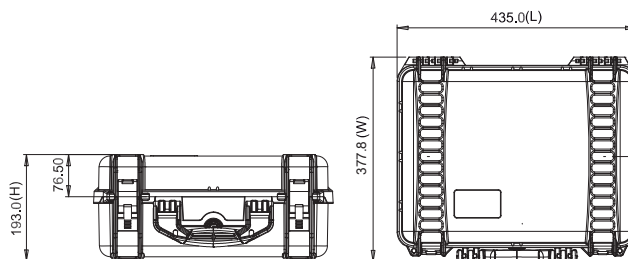

www.hprc.it
info@hprc.it

Plaber S.r.l. a socio unico - HPRC cases
Via Div. Tridentina, 10
I-36061 Bassano del Grappa Vicenza - Italy
Tel. +39 0424 809150

USA office and warehouse:
HPRC USA
110 Chestnut Ridge Rd. #314
Montvale, NJ 07645
Phone +1(201) 989-3353



APPROVALS
ATA 300
IP67
STANAG 4280
DS 81-41

TEST
DROP
IMPACT
HANDLE
WATERTIGHT INTEGRITY
UV COLOR AND MATERIAL
PROTECTION