



plaber[®]

SPECIAL CASES 2019

We are HPRC. We don't just design and manufacture watertight hard protective cases, we supply carrying solutions. And solutions need to be no-hassle and tailored to your needs.

This is why in Autumn 2013 we designed our first case with a foam specially cut to house the DJI Phantom 1.

Now, almost 6 years later, we are a leading manufacturer of custom cases for drones, gimbals, camcorders and cameras but we feel we are still at the beginning: more is yet to come.

H P R C C A S E S
MADE IN ITALY
MANUFACTURED

HPRC VECTOR PANEL

The new protective layer system designed for your Tuning case



Made of special PVC based compound, the Vector Panel ensures:

- foam long-last durability and integrity;
- improved protection for the equipment;
- dedicated item slots, suitably marked, avoiding lost tools;
- easy and quick organization of the case;
- savings in space and time;
- professional design and presentation.



The system significantly increases the overall performance and efficiency of the case in any kind of environment, weather conditions and temperature.



DJI

SPECIAL CASES 2019

PHA4-2710-01
HPRC2710PHA4



dji
PHANTOM 4



- 1 DJI Phantom 4 / Pro / 4 Pro + with Props On / 4 V2.0
- 2 Cables / Miscellaneous
- 3 3 x Filters
- 4 Charger + Cables
- 5 2 x Kits of Spare Props
- 6 Spare Battery
- 7 Spare Battery / Miscellaneous Accessories
- 8 Complimentary HPRC1100 for 8 MicroSD Cards
- 9 Ipad Air / Tablet up to 10"
- 10 Controller Monitor Hood for Tablets / Instructions
- 11 Remote Controller
- 12 Cables
- 13 Small Tools

suitable for v 2.0 low noise propellers



Dimension:

internal dimension

555x459x256(mm) - 21.85x18.07x10.08(in)

external dimension

617x525x280(mm) - 24.29x20.67x11.02(in)



lid: 45(mm) - 1.77(in) **bottom:** 211(mm) - 8.30(in)

Weight:

7.75kg - 17.08lbs

Temperature rating:

Minimum
-40°C -40°F

Maximum
+80°C +176°F

PHA4-2700W-01

HPRC2700WPHA4



- 1 DJI Phantom 4 / Phantom 4 Pro / Phantom 4 Pro + with Props On
- 2 Cables / Miscellaneous
- 3 3 x Filters
- 4 Charger + Cables
- 5 2 x Kits of Spare Props
- 6 Spare Battery
- 7 Spare Battery / Miscellaneous Accessories
- 8 Complimentary HPRC1100 for 8 MicroSD Cards
- 9 Ipad Air / Tablet up to 10"
- 10 Controller Monitor Hood for Tablets / Instructions
- 11 Remote Controller
- 12 Cables
- 13 Small Tools



suitable for v 2.0 low noise propellers



Dimension: **internal dimension**
555x460x256(mm) - 21.85x18.1x10.08(in)
external dimension
620x525x280(mm) - 24.41x20.67x11.02(in)



lid: 46(mm) - 1,81(in) **bottom:** 210(mm) - 8,27(in)

Weight: 8.72kg - 19.22lbs

Temperature rating: Minimum -40°C -40°F Maximum +80°C +176°F

HPRC2700W for DJI Phantom 4RTK

PHA4RTK-2700W-01



- 1 DjI Phantom 4 RTK
- 2 Intelligent Flight Battery
- 3 Remote Controller
- 4 Ipad Air/Tablet Up to 10"
- 5 Hprc1100 For 8 Microsd Cards
- 6 Charging Hub for WB37
- 7 Battery WB37
- 8 Charging Hub for Int.flight Battery
- 9 AC Power Adapter / Miscellaneous Accessories
- 10 Propellers

suitable for v 2.0 low noise propellers

HPRC DJI PHANTOM 4

TECHNICAL FEATURES


Dimension:
Internal dimension
550x460x316(mm) - 21.65x18.11x 12.44(in)
External dimension
620x520x350(mm) - 24.41x20.47x13.78(in)

Weight:
9,40 KG – 20.72 lbs



Temperature rating:
Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

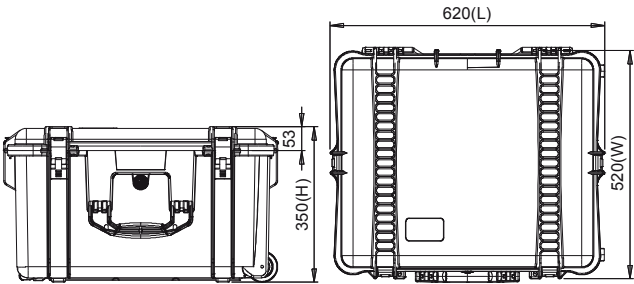

HPRC2780W for DJI Phantom 4 RTK + Ground Station PHA4RTKGS-2780W-01

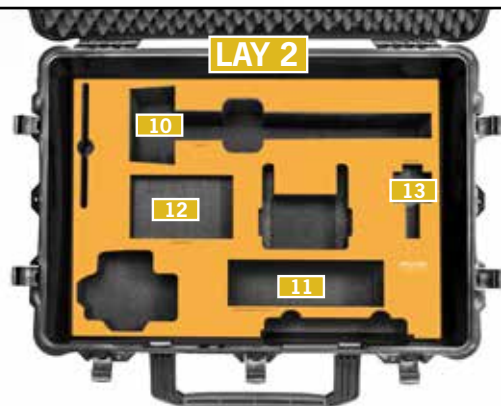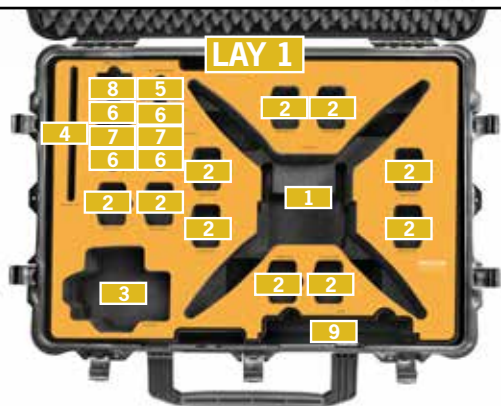

- 1

Dji Phantom 4 RTK
- 2

Intelligent Flight Battery
- 3

Remote Controller
- 4

Ipad Air/Tablet up to 10"
- 5

Hprc 1100 for 8 MicroSD Card
- 6

Battery WB37
- 7

Charging Hub for WB37
- 8

Miscellaneous Accessories
- 9

Propellers
- 10

DRTK 2 Body
- 11

Charging Hub for Int.flight Battery/AC Power Adapter
- 12

Miscellaneous Accessories
- 13

Mobile Phone Holder

TECHNICAL FEATURES


Dimension:
 Internal dimension
 749x525x366(mm) - 29.49x20.67x14.41(in)
 External dimension
 810x586,5x388(mm) - 31.89x23.09x15.28(in)

Weight:
 with foam: 14.30kg - 31.52lbs

Temperature rating:
 Minimum Maximum
 -40°C -40°F +80°C +176°F




TECHNICAL DRAWING

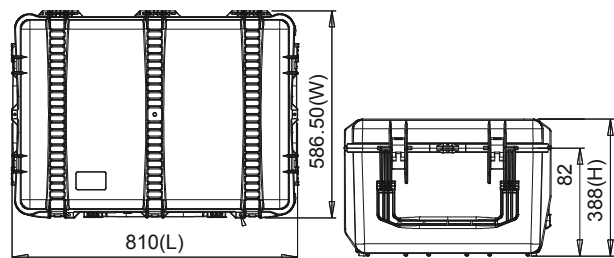

PHA4-BAG27-01

HPRCDROALPHA4

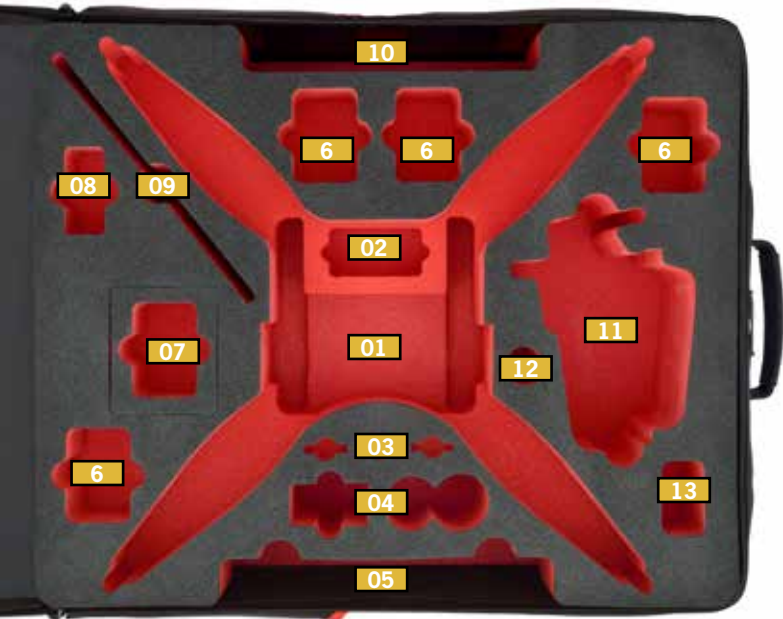

- 1 DJI Phantom 4 / Phantom 4 Pro / Phantom 4 Pro + with Props On
- 2 Cables / Miscellaneous
- 3 3 x Filters
- 4 Charger + Cables
- 5 2 x Kits of Spare Props
- 6 Spare Battery
- 7 Spare Battery / Miscellaneous Accessories
- 8 Complimentary HPRC1100 for 8 MicroSD Cards
- 9 Ipad Air / Tablet up to 10"
- 10 Controller Monitor Hood for Tablets / Instructions
- 11 Remote Controller
- 12 Cables
- 13 Small Tools

suitable for v 2.0 low noise propellers



Dimension: external dimension
560x470x235(mm) - 22.05x18.50x9.25(in)

Weight: 2.30kg - 5.07lbs

HPRC6500W for DJI D-RTK 2 DRTK6500W-01



- 1 D-RTK 2 Body
- 2 Accessories Box (Mobile Phone Holder; Charging Hub, Intelligent Battery, Battery Cover, Ac Power Adapter\Cable etc)
- 3 Extention Rod
- 4 Tripod

TECHNICAL FEATURES


Dimension:
 Internal dimension
 1281x279x243(mm) - 50.43x10.98x9.57(in)
 External dimension
 1330x335x285(mm) - 52.36x13.19x11.22(in)

Weight:
 7,20kg - 15.87lbs

Temperature rating:
 Minimum Maximum
 -40℃ -40°F +80℃ +176°F



TECHNICAL DRAWING

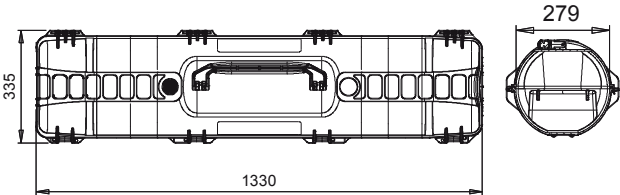




HPRC[®]


TUNING

plaber[®]


HPRC INS2-2780W-02

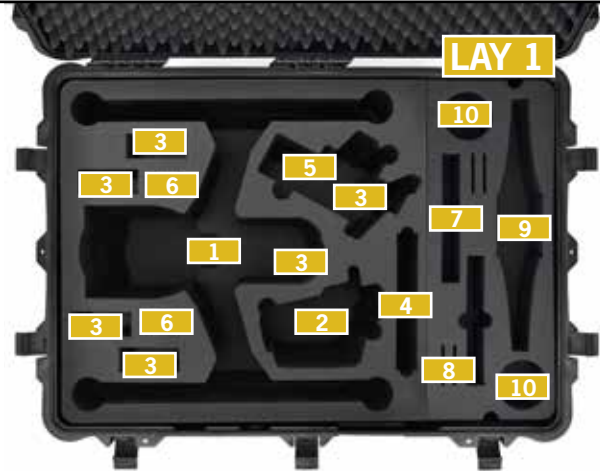

- 1 DJI Inspire 2 in Landing Mode with Gimbal X7 Attached
- 2 Transmitter (Radio Controller)
- 3 Spare Flight Battery
- 4 Crystal Monitor 7.85"
- 5 Cendence Remote Controller
- 6 SSD
- 7 Charger
- 8 Filters
- 9 Props + Spare Props
- 10 Charging Hub

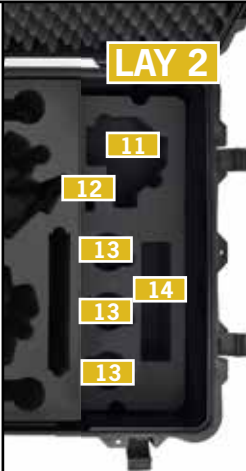

- 11 Gimbal
- 12 Gimbal's Lid
- 13 Lens
- 14 Cables / Miscellaneous

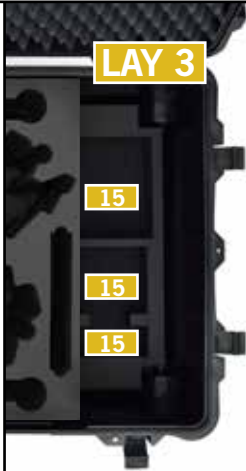

- 15 Miscellaneous / Small Accessories

TECHNICAL FEATURES

Dimension:

Internal dimension
749x525x366(mm) - 29.49x20.67x14.41(in)
External dimension
810x586,5x388(mm) - 31.89x23.09x15.28(in)

Weight:


with foam: 14.30kg - 31.52lbs

Temperature rating:


Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

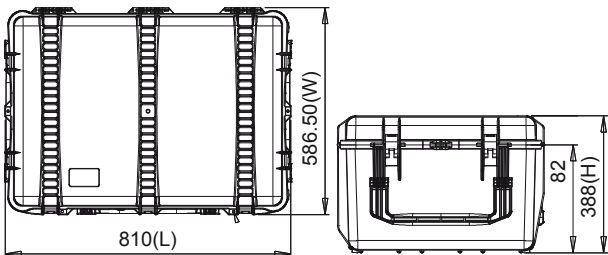

HPRC INS2-4600W-02

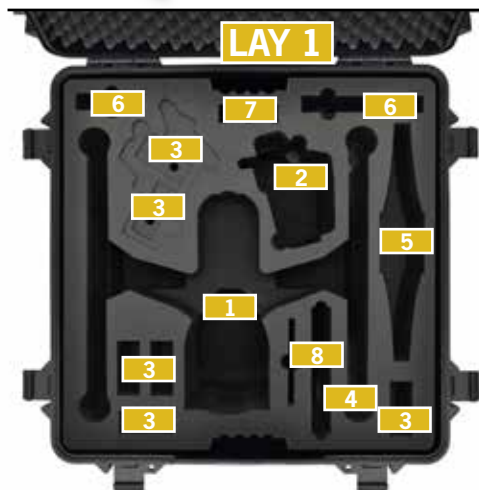

- 1** DJI Inspire 2 in Landing Mode with Gimbal X7 Attached
- 2** Standard Radio Controller
- 3** Spare Flight Battery
- 4** Ipad Mini / Tablet up to 7.9"
- 5** Props + Spare Props
- 6** Charger
- 7** SSD
- 8** CrystalSky 7.85"

- 9** Gimbal
- 10** Battery
- 11** Cables / Miscellaneous
- 12** Lens
- 13** Crystal Monitor
- 14** Charging Hub
- 15** Cendence Remote Controller



TECHNICAL FEATURES

Dimension:

Internal dimension
611x611x345(mm) - 24.05x24.05x13.58(in)
External dimension
670x677x388.5(mm) - 26.38x26.65x15.3(in)

Weight:


with foam: 14.30kg - 31.52lbs

Temperature rating:

Minimum Maximum
-40°C -40°F +80°C +176°F





TECHNICAL DRAWING

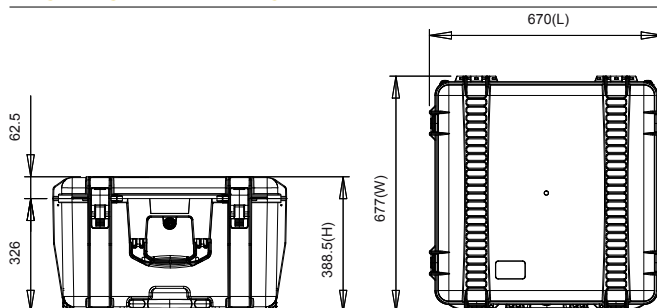

INS2780W-01

HPRC2780WINS

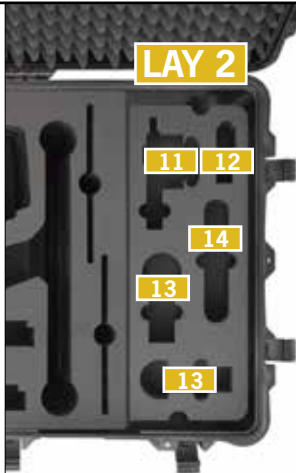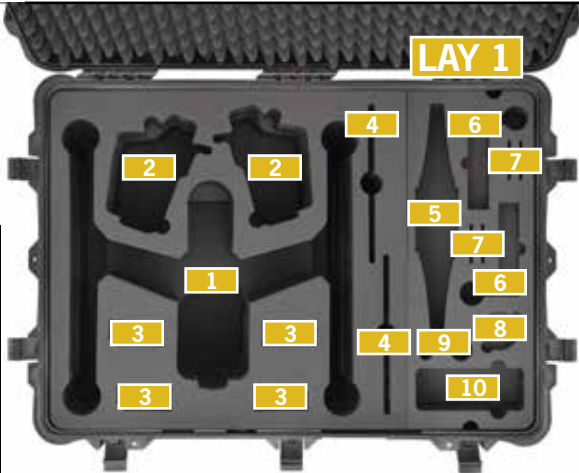

- 1 DJI Inspire 1 - DJI Inspire 1 Pro/RAW with Gimbal Attached
- 2 Transmitter (Radio Controller)
- 3 Spare Flight Battery
- 4 Ipad Air / Tablet up to 10"
- 5 8-10 Spare Props
- 6 Charger
- 7 2 x Filters
- 8 Spare Micro Four Thirds Lens
- 9 Cables
- 10 DJI Osmo (without Gimbal)

- 11 DJI Focus
- 12 DJI Focus Brushless Motor
- 13 Spare Flight Battery OR X3 Gimbal
- 14 Cables / Miscellaneous

- 15 Miscellaneous
- 16 DJI Battery Charging Hub
- 17 Small Accessories / Miscellaneous


TECHNICAL FEATURES

Dimension:
Internal dimension
749x525x366(mm) - 29.49x20.67x14.41(in)
External dimension
810x586,5x388(mm) - 31.89x23.09x15.28(in)

Weight:
with foam: 12,5kg - 27.55lbs





TECHNICAL DRAWING

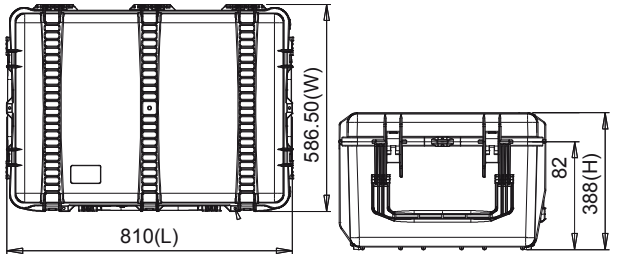

Temperature rating:
Minimum -40°C -40°F
Maximum +80°C +176°F

HPRC
M210-4600W-04

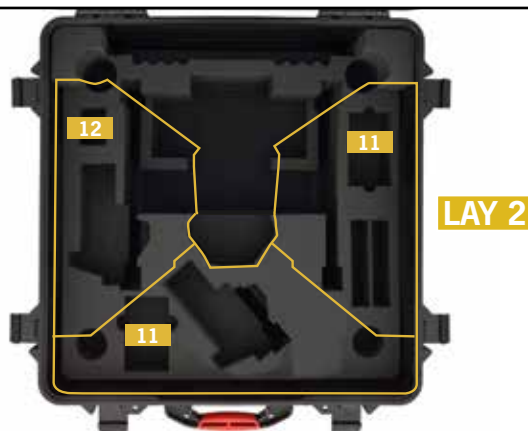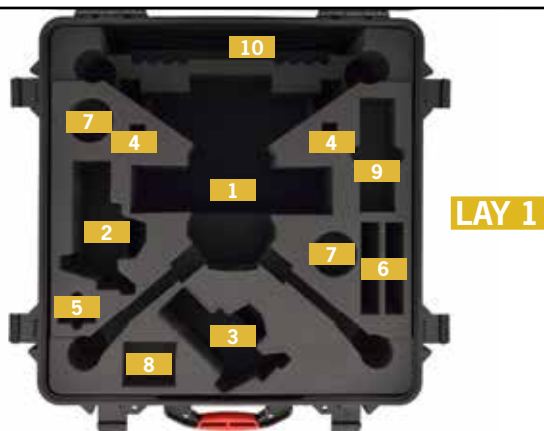

- 1 Dji Matrice 200 or 210 with 1 Gimbal Connector, 2 cameras, 2 GPS kit, 2 batteries TB55 mounted
- 2 Cendence Remote Controller
- 3 Cendence Remote Controller
- 4 CrystalSky Battery (WB37)
- 5 Charging Hub for CrystalSky (WCH2)
- 6 CrystalSky 7.85" with sun hood mounted
- 7 Charging Hub (IN2)
- 8 x 1 battery TB55
- 9 Battery Charger
- 10 x 4 Propellers Air

- 11** x 1 battery TB55
- 12** Small Accessories



TECHNICAL FEATURES

Dimension:

internal dimension
611x611x345(mm) - 24.05x24.05x13.58(in)
external dimension
670x677x388.5(mm) - 26.38x26.65x15.3(in)


Weight:

empty: 9,9kg - 21.83lbs

Temperature rating:

Minimum	Maximum
-40°C -40°F	+80°C +176°F

TECHNICAL DRAWING

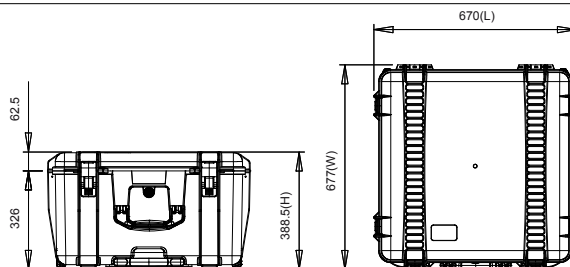



HPRC MAV2-2400BLK-02



- 1** Smart Controller/Battery Charger, Cables
- 2** Remote Controller/Battery Charger, Cables
- 3** Battery Charging Hub /Adapter, Various
- 4** DJI Mavic 2 (Intelligent Flight Battery and Gimbal Protector Included)
- 5** Propellers
- 6** Usb Adapter
- 7** Little Accessories
- 8** Usb Power Adapter/cable
- 9** Intelligent Flight Batteries



HPRC DJI MAVIC 2

TECHNICAL FEATURES

Dimension:

internal dimension
380x266x152(mm) - 14.96x10.47x5.98(in)
external dimension
405x330x170(mm) - 15.94x12.99x6.69(in)

Weight:


2,38kg - 5.25lbs

Temperature rating:

Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

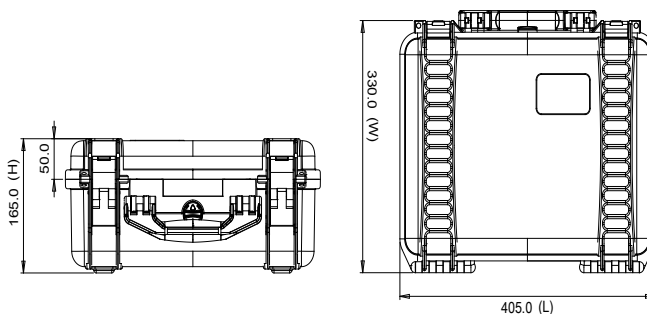

HPRC MAV2-3500BLK-02



- 1 DJI Mavic 2 (Intelligent Flight Battery and Gimbal Protector Included)
- 2 Remote Controller/Smart Controller
- 3 Intelligent Flight Batteries
- 4 Usb Power Adapter/cable
- 5 Mavic 2 Car Charger
- 6 Battery Charging Hub /Adapter, Various
- 7 Various / Usb Adaptor
- 8 Cables
- 9 Battery Charging Hub /Adapter, Various

TECHNICAL FEATURES


Dimension:
 internal dimension
 433x319x169(mm) - 17.05x12.56x6.65(in)
 external dimension
 498x370x185(mm) - 19.61x14.57x7.28(in)

Weight:
 3,55kg - 7.82lbs

Temperature rating:
 Minimum
 -40°C -40°F
 Maximum
 +80°C +176°F



TECHNICAL DRAWING

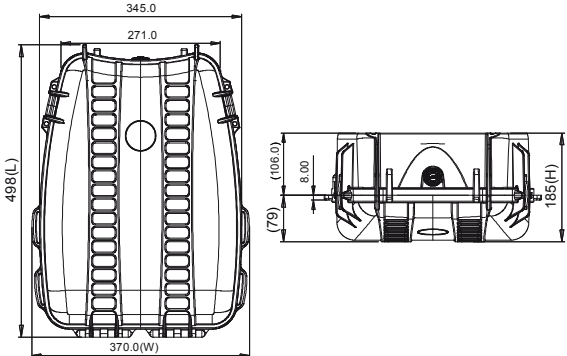

HPRC MAVBAG35-03



- 1 DJI Mavic 2 (Intelligent Flight Battery and Gimbal Protector Included)
- 2 Remote Controller/Smart Controller
- 3 Intelligent Flight Batteries
- 4 Usb Power Adapter/cable
- 5 Mavic 2 Car Charger
- 6 Battery Charging Hub /Adapter, Various
- 7 Various / Usb Adaptor
- 8 Cables
- 9 Battery Charging Hub /Adapter, Various



TECHNICAL FEATURES

Dimension:
 internal dimension
 433x319x169(mm) - 17.05x12.56x6.65(in)
 external dimension
 498x370x185(mm) - 19.61x14.57x7.28(in)



HPRC DJI MAVIC 2

HPRC SPK2300BLK-01

FLY MORE COMBO



HPRC SPK2300YEL-01

FLY MORE COMBO



HPRC SPK2300BLU-01

FLY MORE COMBO



HPRC SPK2300RED-01

FLY MORE COMBO



HPRC DJI SPARK



- 1 DJI Spark Fly More Combo (Props Attached)
- 2 Batteries (1 Installed in Spark)
- 3 Remote Controller
- 4 Charging Hub
- 5 Power Supply
- 6 Power Plug*
- 7 Spare Props
- 8 Accessory Cavity\ Battery Charging Hub
- 9 Props Guards / Miscellaneous



TECHNICAL FEATURES

Dimension:

internal dimension
304x231x137(mm) - 11.97x9.09x5.39(in)
external dimension
335x289x155(mm) - 13.19x11.38x6.10(in)

Weight:


1,90kg - 4.19lbs

Temperature rating:

Minimum -40°C -40°F Maximum +80°C +176°F



TECHNICAL DRAWING

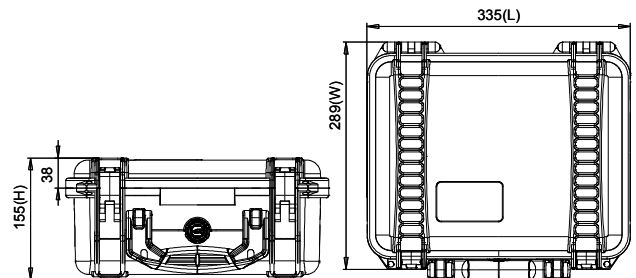

HPRC CEN2460-02



- 1 Cendence Remote Controller
- 2 CrystalSky 7.85"
- 3 Battery Charger
- 4 Charging hub for CrystalSky
- 5 CrystalSky Battery



HPRC DJI CENDENCE

TECHNICAL FEATURES

Dimension:


internal dimension 409x306x175(mm) - 16.10x12.05x6.89(in)
external dimension 434x371x193(mm) - 17.09x14.61x7.60(in)

Weight:

empty: 2,60kg - 5.73lbs
with foam: 3,14kg - 6.92lbs

Temperature rating:

Minimum Maximum
-40°C -40°F +80°C +176°F

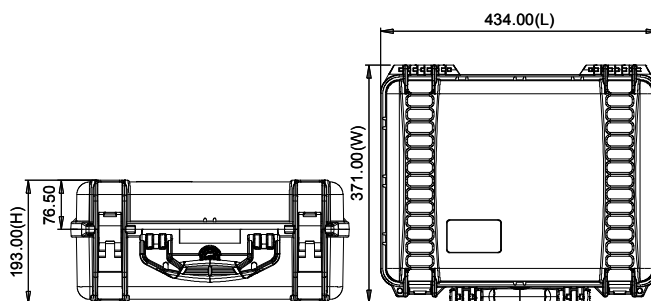

HPRC1400 for DJI OSMO ACTION OSMACT-1400-01



- 1 Osmo Action and Camera Frame
- 2 Battery
- 3 Quick Release Base
- 4 SD Card Rack
- 5 USB-C Cable Flat
- 6 Locking Screw



TECHNICAL FEATURES

Dimension:
 internal dimension
 180x110x40(mm) - 7,08x4,33x1,57(in)
 external dimension
 200x142x48(mm) - 7,87x5,59x1,88(in)

Weight:
 empty: 0,60kg - 1,32lbs

Temperature rating:
 Minimum Maximum
 -40°C -40°F +80°C +176°F

TECHNICAL DRAWING



HPRC1400 for DJI OSMO POCKET OSMPKT-1400-01



- 1 DJI Osmo Pocket
- 2 Accessories / Power Cable
- 3 SD Card Rack
- 4 Smartphone adapters

TECHNICAL FEATURES


Dimension:
 internal dimension
 180x110x40(mm) - 7,08x4,33x1,57(in)
 external dimension
 200x142x48(mm) - 7,87x5,59x1,88(in)

Weight:
 empty: 0,60kg - 1,32lbs

Temperature rating:
 Minimum Maximum
 -40°C -40°F +80°C +176°F



TECHNICAL DRAWING

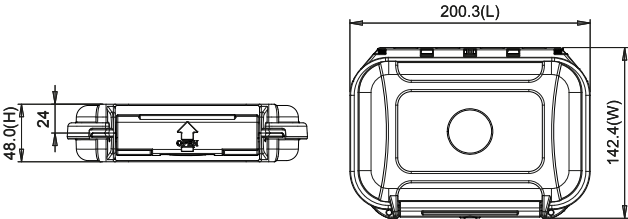

HPRC GGS-2460-01



for DJI GOGGLES




- 1 Headband
- 2 Dji Goggles Body
- 3 Cables / Miscellaneous Accessories
- 4 Eu Charger
- 5 Uk Charger

TECHNICAL FEATURES

Dimension:
internal dimension 409x306x175(mm) - 16.10x12.05x6.89(in)
external dimension 434x371x193(mm) - 17.09x14.61x7.60(in)

Weight:
empty: 2,60kg - 5.73lbs
with foam: 3,14kg - 6.92lbs

Temperature rating:
Minimum -40°C -40°F Maximum +80°C +176°F

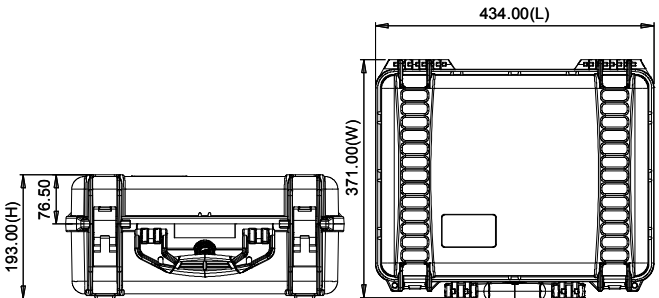

HPRC BAT-2550W-02



BATTERY FOR DJI M200 / M210



- 1 Charging Hub
- 2 Battery Charger
- 3 Battery TB50 or TB55
- 4 Charging Hub for CristalSky (WCH2)
- 5 CrystalSky Battery (WB37)



TECHNICAL FEATURES

Dimension:

internal dimension
513x288x200(mm) - 20.19x11.34x7.87(in)
external dimension
549x346x236(mm) - 21.61x13.62x9.29(in)

Weight:


empty: 4.35kg - 9.57lbs

Temperature rating:

Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

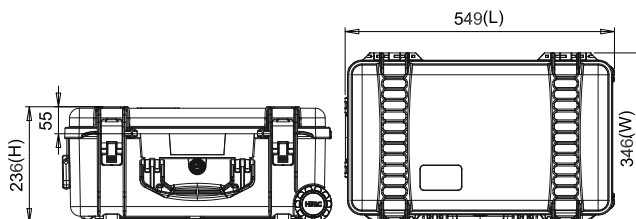

BAT2400-02

PHANTOM/INSPIRE BATTERY CASE

New HPRC2400 with customized foam can hold until 6 spare batteries for DJI Phantom 4 or DJI Inspire 1 or 2. The pre cutted foam could have the following internal layout:



- 6 batteries Inspire 1 or 2
- Charger for Inspire 100W or Charger for Inspire 180W



- 6 batteries for Phantom 4
- Charger for Phantom 4



- 3 batteries for Phantom 4
- + 3 batteries for Inspire 1 or 2
- Charger for Phantom or Charger for Inspire 1 or 2

HPRC DJI BATTERY CASES

- 1 Battery
- 2 Charger + Cables

TECHNICAL FEATURES


Dimension:
 internal dimension 380x266x152(mm) - 14.96x10.47x5.98(in)
 external dimension 405x330x170(mm) - 15.94x12.99x6.69(in)
 lid: 45(mm) - 1.77(in) bottom: 107(mm) - 4.21(in)

Weight:
 2,38kg - 5.25lbs


Temperature rating:
 Minimum -40°C -40°F
 Maximum +80°C +176°F



TECHNICAL DRAWING

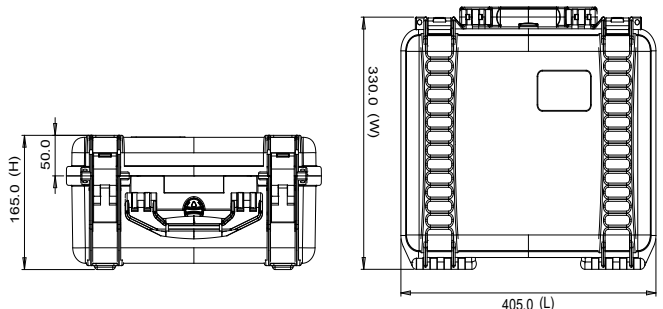

HPRC BAT-2550W-01

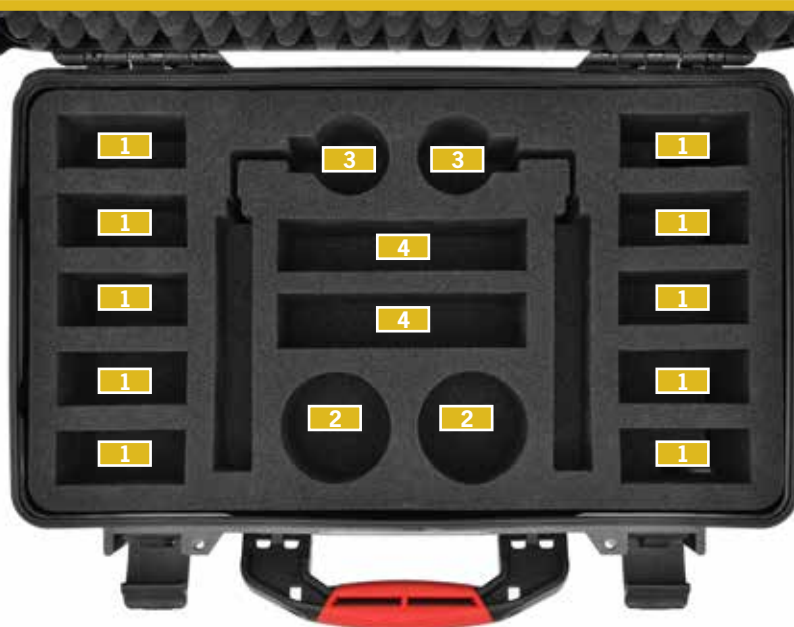

- 1 Battery TB50
- 2 Charger Hub
- 3 Battery Charger
- 4 Miscellaneous



TECHNICAL FEATURES

Dimension:

internal dimension
513x288x200(mm) - 20.19x11.34x7.87(in)
external dimension
549x346x236(mm) - 21.61x13.62x9.29(in)

Weight:


empty: 4.35kg - 9.57lbs

Temperature rating:

Minimum -40°C -40°F
Maximum +80°C +176°F



TECHNICAL DRAWING

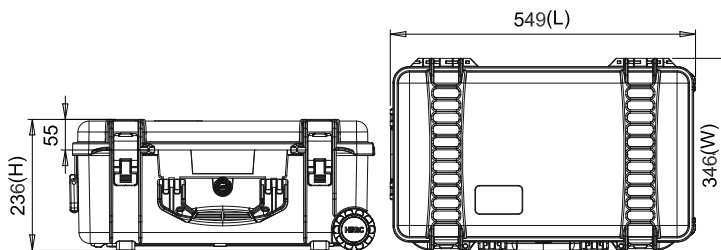

HPRC | RONIN-S



HPRC ROS2500-01



FOR DJI RONIN-S



- 1 Gimbal with Focus Wheel
- 2 Extended Grip/Tripod
- 3 Camera Mounting Plate
- 4 24W Usb Power Adapter
- 5 BG37 Grip x 2
- 6 Accessories Box

TECHNICAL FEATURES

Dimension:


internal dimension 450x323x175(mm) - 17.72x12.72x6.89(in)
external dimension 478x390x194(mm) - 18.82x15.35x7.64(in)

Weight:

3,71kg - 8.18lbs

Temperature rating:

Minimum Maximum
-40°C -40°F +80°C +176°F

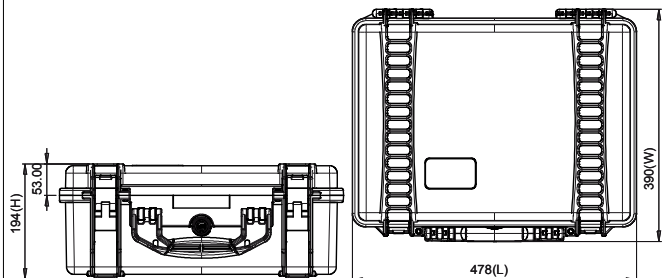

HPRC ROS2550W-01



FOR DJI RONIN-S



- 1 Gimbal with Focus Wheel
- 2 Extended Grip/Tripod
- 3 Camera Mounting Plate
- 4 24W Usb Power Adapter
- 5 BG37 Grip x 3
- 6 Accessories Box
- 7 Lens
- 8 Panasonic Gh5 / Sony Alpha 7 camera body

TECHNICAL FEATURES

Dimension:

internal dimension
513x288x200(mm) - 20.19x11.34x7.87(in)
external dimension
549x346x236(mm) - 21.61x13.62x9.29(in)

Weight:


empty: 4.35kg - 9.57lbs

Temperature rating:

Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

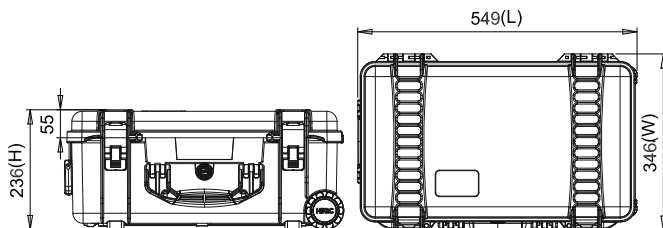

HPRC ROS3500-01



- 1 Gimbal with Focus Wheel
- 2 Extended Grip/Tripod
- 3 Camera Mounting Plate
- 4 24W Usb Power Adapter
- 5 BG37 Grip x 2
- 6 Accessories Box

TECHNICAL FEATURES

Dimension:
 internal dimension
 433x319x169(mm) - 17.05x12.56x6.65(in)
 external dimension
 498x370x185(mm) - 19.61x14.57x7.28(in)


Weight:
 3,55kg - 7.82lbs

Temperature rating:
 Minimum
 -40°C -40°F

Maximum
 +80°C +176°F



TECHNICAL DRAWING

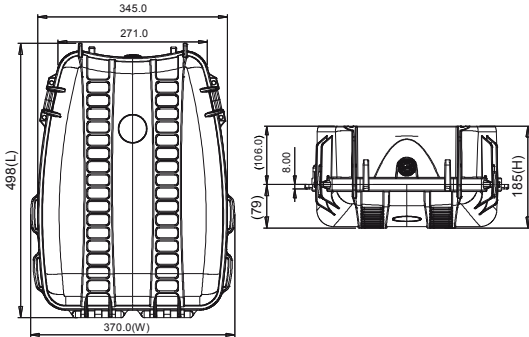



RMX2730W-01



- 1 DJI Ronin-MX Transmitter (Controller)
- 2 DJI Ronin-MX Gimbal
- 3 4x Spare Batteries
- 4 2x Charger
- 5 2x Side Handles
- 6 Top Handle Bar
- 7 Tuning Stand
- 8 Camera Mounting Plate



TECHNICAL FEATURES

Dimension:
internal dimension 509x460x316(mm) - 20.04x18.11x12.44(in)
external dimension 620x520x350(mm) - 24.41x20.47x13.78(in)

lid: 45(mm) - 1.77(in) bottom: 271(mm) - 10.66(in)


Weight:
empty: 7,55kg - 16.64lbs
with cubed foam: 10,43kg - 22.99lbs

Temperature rating:
Minimum -40°C -40°F Maximum +80°C +176°F

Colors:
Black



TECHNICAL DRAWING

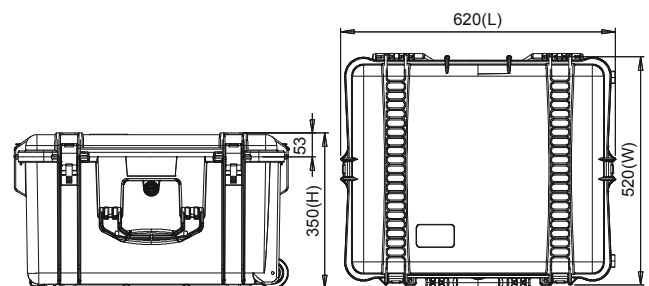

HPRC DJI RONIN-MX

HPRC RON2-2780W-01



dji
RONIN 2



- 1** Gimbal with camera and 2 batteries attached
- 2** TB50 Intelligent Battery
- 3** Remote controller
- 4** Lower Ronin 2 Ring
- 5** Accessories Package
- 6** Upper Ronin 2 Ring with grip mounted

- 7** Cables
- 8** Motion Block
- 9** Top Mountain Block
- 10** Camera Base Plate
- 11** 15mm Focus Rod Mount
- 12** Quad Charging Hub
- 13** Universal Mount
- 14** Camera Top Cross Bar
- 15** Accessories Mount
- 16** 15mm Rod
- 17** Battery Charger

TECHNICAL FEATURES

Dimension:

Internal dimension
749x525x366(mm) - 29.49x20.67x14.41(in)
External dimension
810x586,5x388(mm) - 31.89x23.09x15.28(in)

Weight:

with foam: 13,6kg - 29,9lbs


Temperature rating:

Minimum Maximum
-40°C -40°F +80°C +176°F



W

TECHNICAL DRAWING

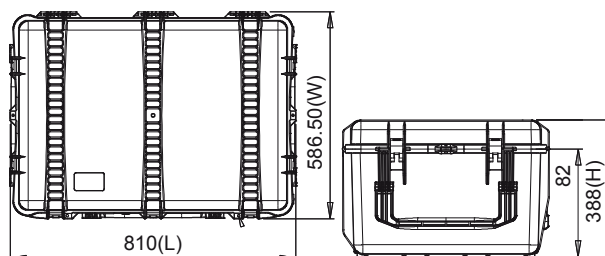

ROM2700W-01

HPRC2700WROM



- 1 Ronin-M Transmitter (Controller)
- 2 Ronin-M Gimbal
- 3 2x Side Handles
- 4 Cables/Screws/Small Accessories
- 5 Top Handle Bar
- 6 Cables/Screws/Accessories
- 7 Tuning Stand
- 8 3x Spare Batteries
- 9 2x Charger
- 10 Camera Mounting Plate
- 11 7" Field Monitor



Dimension:

internal dimension

555x460x256(mm) - 21,85x18,1x10,08(in)

external dimension

620x520x275(mm) - 24,41x20,47x10,83(in)

lid: 46(mm) - 1,81(in) bottom: 210(mm) - 8,27(in)

Weight:

empty: 7,55kg - 16,65lbs

with foam: 8,68 KG / 19,14lbs

Temperature rating:

Minimum
-40°C -40°F

Maximum
+80°C +176°F



HPRC DJI RONIN-M TRANS.



ATOMOS



SPECIAL CASES 2019



HPRC2300 for Atomos Ninja V NJAV-2300-01









1

2

3

4

5

6

7

8

9

1 Ninja Atomos V with AtomX SSD mini and Battery mounted

2 Ninja V Sunhood

3 Battery

4 12V-3A AC Power Supply

5 Cables/Miscellaneous

6 3 Master Caddy II

7 Lector docking station USB-C 3.1

8 Battery Eliminator

9 Power kit Atomos

HPRC ATOMOS NINJA V

TECHNICAL FEATURES


Dimension:
 Internal dimension
 304x231x137(mm) - 11.97x9.09x5.39(in)
 External dimension
 335x289x155(mm) - 13.19x11.38x6.10(in)

Weight:
 1,90kg - 4.19lbs

Temperature rating:
 Minimum Maximum
 -40°C -40°F +80°C +176°F



TECHNICAL DRAWING

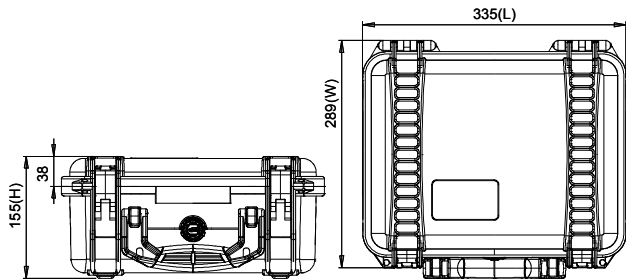

HPRC2730W for Atomos Sumo19 SM19-2730W-01



- 1

Atomos Sumo 19" Monitor Recorder
- 2

Atomos Sunhood
- 3

Charger
- 4

3 Master caddy II
- 5

DM-130A Gold Mount Mini Battery or similar
- 6

D-4BA Battery Extender or similar

TECHNICAL FEATURES

Dimension:
 internal dimension 509x460x316(mm) - 20.04x18.11x12.44(in)
 external dimension 620x520x350(mm) - 24.41x20.47x13.78(in)


lid: 45(mm) - 1.77(in) bottom: 271(mm) - 10.66(in)

Weight:
 empty: 7,55kg - 16.64lbs
 with cubed foam: 10,43kg - 22.99lbs

Temperature rating:
 Minimum -40°C -40°F Maximum +80°C +176°F

Colors:
 Black

TECHNICAL DRAWING

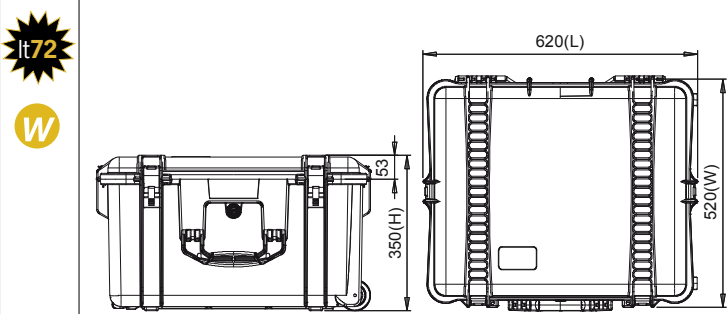





ZHIYUN CRANE

SPECIAL CASES 2019

HPRC2600W for Zhiyun Crane 3 Lab

CR3-2600W-01



- 1** Crane 3 Lab Stabilizer
- 2** TransMount Handheld Tripod
- 3** Battery Charger
- 4** Batteries 18650
- 5** Cable Storage Case
- 6** Quick Release Plate
- 7** TransMount Phone Holder



HPRC ZHIYUN CRANE 3 LAB

TECHNICAL FEATURES

Dimension:

Internal dimension
482x358x218(mm) - 18.98x14.09x8.58(in)
External dimension
546x423x250(mm) - 21.05x16.65x9.84(in)

Weight:


6,97kg - 15.37lbs

Temperature rating:

Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

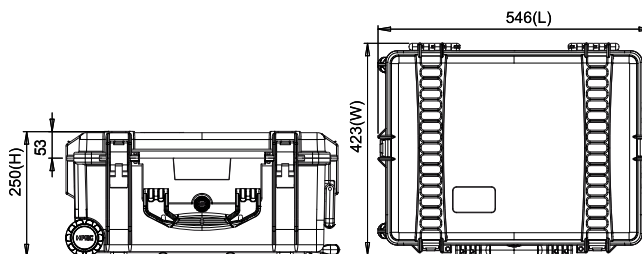




FREEFLY

SPECIAL CASES 2019

HPRC FFS-4600W-02

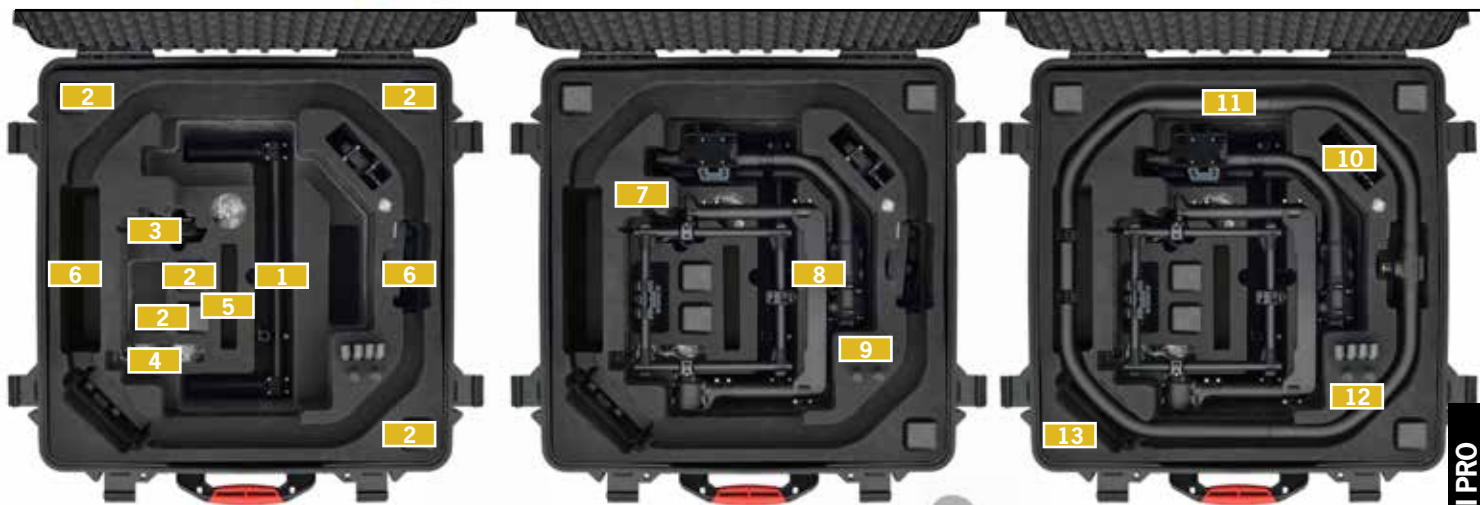

- 1 Mimic / Classic Handle
- 2 Battery
- 3 Mimic Antenna
- 4 Rolls
- 5 Miscellaneous
- 6 MōVI Ring Pro with mounted feet

- 7 Cables
- 8 Main Gimbal
- 9 Plastic rings for MōVI Ring Pro

- 10 MōVI Pro Low Profile Handle
- 11 MōVI Ring Pro with mounted feet
- 12 Freely Hex Driver - 2.0+2.5MM
- 13 Battery Charger



TECHNICAL FEATURES

Dimension:

Internal dimension
611x611x345(mm) - 24.05x24.05x13.58(in)
External dimension
670x677x388.5(mm) - 26.38x26.65x15.3(in)

Weight:


with foam: 14.30kg - 31.52lbs

Temperature rating:

Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

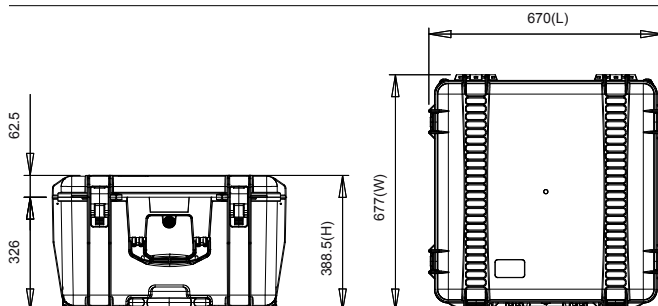



YUNEEC

SPECIAL CASES 2019

TYH-4600W-01



- 1 Yuneec Typhoon H
- 2 Spare Battery
- 3 Remote Controller
- 4 2 Kits of Spare Props
- 5 Transformer
- 6 Charger
- 7 Miscellaneous Accessories
- 8 Small Accessories / Cables
- 9 Small Tools
- 10 Sunshade



HPRC YUNEEC TYPHOON H

TECHNICAL FEATURES

Dimension:

internal dimension 611x611x345(mm) - 24.05x24.05x13.58(in)
external dimension 670x677x388.5(mm) - 26.38x26.65x15.3(in)

lid: 55.5(mm) - 2.18(in) bottom: 289(mm) - 11.37(in)

Weight:

12,5kg - 27.55lbs

Temperature rating:


Minimum Maximum
-40°C -40°F +80°C +176°F

Colors:

Black



TECHNICAL DRAWING

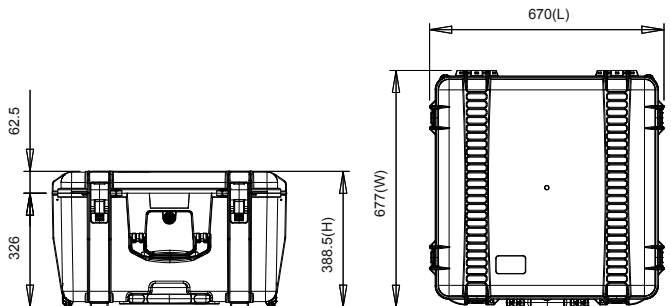



3D ROBOTICS

SPECIAL CASES 2019

SOL2700W-01

HPRC2700WSOL



- 1 3DR Solo with Props on
- 2 2 Spare Motors
- 3 2 Kits of Spare Props
- 4 Spare Battery
- 5 Small Accessories / Cables
- 6 GoPro with Housing
- 7 Transformer
- 8 Charger
- 9 Ipad Air / Tablet up to 10"
- 10 4 GoPro Batteries
- 11 Remote Controller

HPRC 3D ROBOTICS 3DR SOLO



Dimension: **internal dimension**
555x460x256(mm) - 21,85x18,1x10,08(in)
external dimension
620x520x275(mm) - 24,41x20,47x10,83(in)



lid: 46(mm) - 1,81(in) **bottom:** 210(mm) - 8,27(in)

Weight: **empty:** 7,55kg - 16,65lbs
with foam: 8,68 KG / 19,14lbs

Temperature rating: **Minimum** -40°C -40°F **Maximum** +80°C +176°F



CHASING-INNOVATION

SPECIAL CASES 2019

HPRC2710 for Gladius Mini GLA2710-01



TECHNICAL FEATURES

Dimension:

Internal dimension
 555x459x256(mm) - 21.85x18.07x10.08(in)
 External dimension
 617x525x280(mm) - 24.29x20.67x11.02(in)

Weight:


6.71kg - 14.76lbs

Temperature rating:

Minimum Maximum
 -40°C -40°F +80°C +176°F



TECHNICAL DRAWING

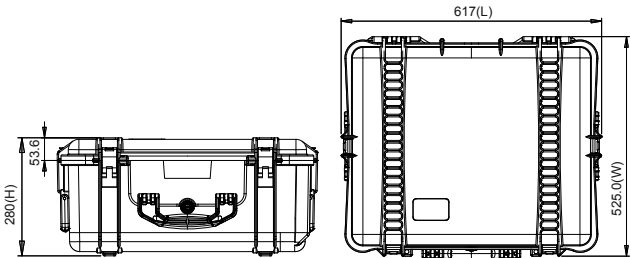



BLACKMAGIC

SPECIAL CASES 2019

HPRC URS2730W-03



FOR URSA MINI PRO
and URSA BROADCAST



- 1 BlackMagic Ursa Mini Pro / Broadcast with shoulder pad and top handle mounted
- 2 Tripod Plate
- 3 Shoulder Mount kit - Rods clamps
- 4 Batteries
- 5 Lens
- 6 Accessories / Cables
- 7 HPRC1100 Memory card holder for CFast/SDHC cards
- 8 Charger standard and Charger SWIT S-3802S



HPRC BLACKMAGIC URSA MINI PRO

TECHNICAL FEATURES

Dimension:
internal dimension 509x460x316(mm) - 20.04x18.11x12.44(in)
external dimension 620x520x350(mm) - 24.41x20.47x13.78(in)
lid: 45(mm) - 1.77(in) bottom: 271(mm) - 10.66(in)


Weight:
empty: 7,55kg - 16.64lbs
with cubed foam: 10,43kg - 22.99lbs

Temperature rating:
Minimum -40°C -40°F
Maximum +80°C +176°F

Colors:
Black



TECHNICAL DRAWING

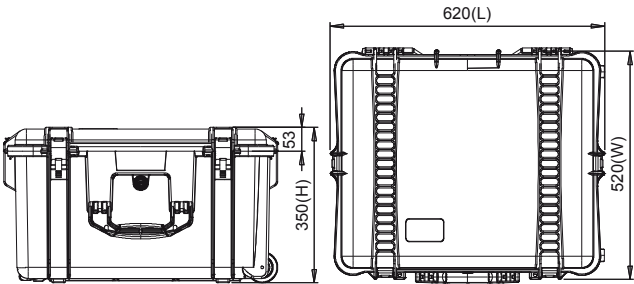

HPRC

ADV1-2710-01

Blackmagicdesign



1

 Blackmagic Design Atem 1 M/E Advanced Panel

HPRC BLACKMAGIC ATEM 1 M/E



Dimension:	internal dimension		
	555x459x256(mm) - 21.85x18.07x10.08(in)		
	external dimension		
	617x525x280(mm) - 24.29x20.67x11.02(in)		
lid: 45(mm) - 1.77(in) bottom: 211(mm) - 8.30(in)			
Weight:	7.75kg - 17.08lbs		
Temperature rating:	Minimum		Maximum
	-40°C -40°F		+80°C +176°F

HPRC2400 for Blackmagic Pocket Camera 4K PKT2400-01



- 1 Camera Blackmagic Pocket 4K
- 2 Batteries
- 3 Wise Portable 512 GB
- 4 HPRC1100Mem
- 5 30W Power Supply with international adapters
- 6 International adapters
- 7 Lens: Olympus M. Zuiko Digital ED 12-40mm F28 Pro

TECHNICAL FEATURES


Dimension:
 internal dimension
 380x266x152(mm) - 14.96x10.47x5.98(in)
 external dimension
 405x330x170(mm) - 15.94x12.99x6.69(in)

Weight:
 2,38kg - 5.25lbs

Temperature rating:
 Minimum Maximum
 -40°C -40°F +80°C +176°F



TECHNICAL DRAWING

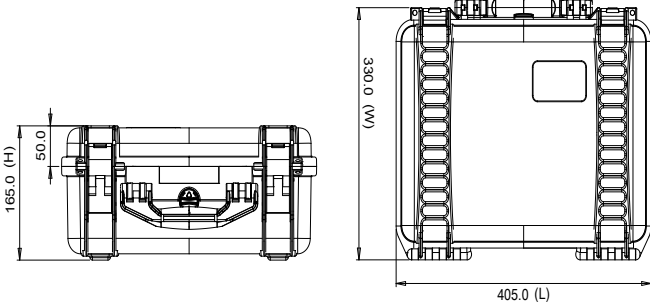



G O P R O

SPECIAL CASES 2019

HPRC1400 for GOPRO HERO7 GPR7-1400-01



- 1 Gopro Hero7 with Camera Frame
- 2 Battery
- 3 SD Card Rack
- 4 Cable
- 5 J-Hook Buckle



HPRC GOPRO HERO7

TECHNICAL FEATURES


Dimension:
 internal dimension
 180x110x40(mm) - 7,08x4,33x1,57(in)
 external dimension
 200x142x48(mm) - 7,87x5,59x1,88(in)

Weight:
 empty: 0,60kg - 1,32lbs

Temperature rating:
 Minimum Maximum
 -40°C -40°F +80°C +176°F



TECHNICAL DRAWING

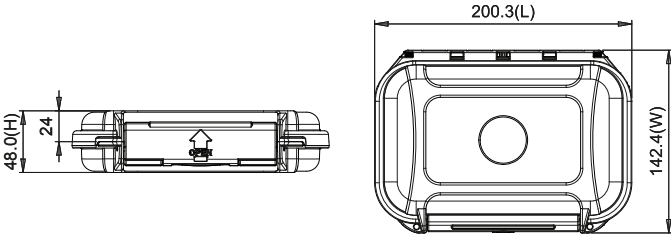



NIKON

SPECIAL CASES 2019

HPRC

D850-2460-01



for **NIKON D850**



- 1
- D850 Camera Body
-
- 2
- Additional EN-EL15a Rechargeable Li-ion Battery
-
- 3
- ME-W1 Wireless Microphone
-
- 4
- ME-1 Stereo Microphone
-
- 5
- Atomos Ninja Flame
-
- 6
- Lenses: AF-S NIKKOR 35mm f/1,8G ED / AF-S NIKKOR 85mm f/1.8G / AF-S NIKKOR 20mm f/1,8G ED
-
- 7
- MH-25A Battery Charger/ UC-E22 USB Cable / Coiled HDMI Cable


HPRC NIKON D850

TECHNICAL FEATURES

Dimension:
internal dimension 409x306x175(mm) - 16.10x12.05x6.89(in)
external dimension 434x371x193(mm) - 17.09x14.61x7.60(in)

Weight:
empty: 2,60kg - 5.73lbs
with foam: 3,14kg - 6.92lbs

Temperature rating:
Minimum -40°C -40°F
Maximum +80°C +176°F

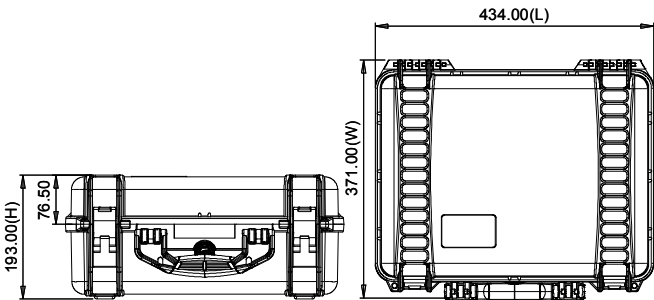



PANASONIC

SPECIAL CASES 2019

HPRC GH52460-01



FOR PANASONIC GH5

HPRC2460 for PANASONIC GH5 is a special edition, designed to safely carry your GH5 Lumix G Series.



- 1 PANASONIC GH5 with or without professional cage and lenses mounted
- 2 Lenses: LUMIX G 8MM F3,5 (FISHEYE) HD, LUMIX DG SUMMILUX 12 F1.4, LUMIX G PANCAKE 14MM F2.5, LEICA DG SUMMILUX 15mm / F1,7 ASPH, LUMIX G 20MM F1,7 (ASPH), LEICA DG SUMMILUX 25mm F1.4 (ASPH), LUMIX G 25MM F1.7 ASPH., LUMIX G 30MM MACRO F2,8, LEICA DG NOCTICRON 42,5 MM F 1.2 (ASPH) HD, LUMIX G DG 1,7 / 42,5MM ASPH/POWER O.I.S., LEICA DG MACRO-ELMARIT 45MM F2,8 (ASPH), LUMIX G VARIO 7-14MM F4,0 (ASPH) HD, LEICA DG VARIO ELMARIT 8-18, LUMIX G VARIO 12-32MM F3.5-F5.6 (ASPH) HD, LUMIX G X VARIO 12-35MM F2,8 (ASPH) HD, LUMIX G X VARIO 12-35 II, LEICA DG VARIO ELMARIT 12-60, LUMIX G VARIO 12-60, LUMIX G VARIO 14-42MM F3,5-5,6 (ASPH) HD, LUMIX G VARIO 14-42MM F3,5-5,6 (ASPH) HD, LUMIX G X VARIO PZ 14-42MM F3,5-5,6 (ASPH), LUMIX G VARIO 14-45MM F3,5-5,6 (ASPH) HD, LUMIX G X VARIO 35-100MM F2,8 HD, LUMIX G X VARIO 35-100 II, LUMIX G VARIO 35-100MM F4,0-5,6, LUMIX G VARIO 45-200 II, LUMIX G 12,5MM F12,5 3D
- 3 Battery chargers, cables
- 4 Accessories (baseplate, rods, top grip handles, lockports, cables, batteries, controllers, GoPro)
- 5 External recorder Atomos/Sound Device etc

TECHNICAL FEATURES

Dimension:


internal dimension 409x306x175(mm) - 16.10x12.05x6.89(in)
external dimension 434x371x193(mm) - 17.09x14.61x7.60(in)

Weight:

3,14kg - 6.92lbs

Temperature rating:

Minimum Maximum
-40°C -40°F +80°C +176°F

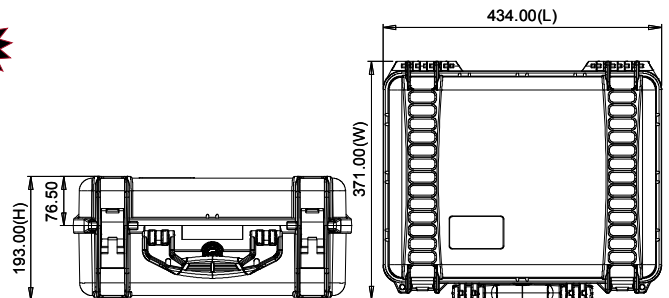



SONY

SPECIAL CASES 2019

ALP2460-01



HPRC2460 for ALPHA 7 is a special edition, designed to safely carry your SONY Alpha Series.



- 1 Sony A7/A7R/A7S/A7II/A7RII/A7SII/a6300 with or without professional cage and lenses mounted (EF/F/PL-Mount/Leica R)
- 2 Lenses: Sony FE 50/1.4, 50/2,8 Macro, 24-70/2.8 G, 85/1,4 G, 16-35/4, 24-70/4, 28-70/3.5-5.6, 28/2.0 - SONY ZA 35/2.8, 35/1.4, 50/1.4, 50/1,8 55/1.8/ 10-18/4 - Zeiss Loxia 21/2.8, 35/2.0, 50/2.0
- 3 Battery chargers, cables
- 4 Accessories (baseplate, rods, top grip handles, lockports, cables, batteries, controllers, GoPro)
- 5 external recorder Atomos/Sound Device etc



TECHNICAL FEATURES

Dimension:


internal dimension 409x306x175(mm) - 16.10x12.05x6.89(in)
external dimension 434x371x193(mm) - 17.09x14.61x7.60(in)

Weight:

3,14kg - 6.92lbs

Temperature rating:

Minimum Maximum
-40°C -40°F +80°C +176°F

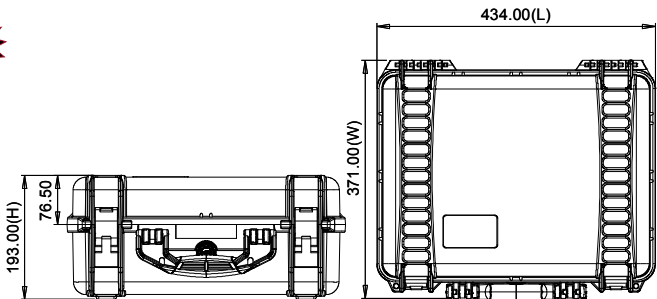

HPRC2730W for Sony Venice VEN2730W-01



- 1 Sony Venice With Axs-R7 Mounted
- 2 Axs Memory And Sxs Memory Axs-Ar1
- 3 Lanparte Universal Grip Ug-02
- 4 Accessories/Air Evf Mount
- 5 Micellaneous
- 6 Power Supply VLock Pc2l
- 7 Battery VLock B100usb/B230usb
- 8 Viewfinder Dvf-EI200
- 9 Hprc1300 Sxs
- 10 Shoulder Mount Accessory Vct-Fsa5
- 11 Tripod Place
- 12 Shoulder Mount Rods



TECHNICAL FEATURES

Dimension:
 internal dimension 509x460x316(mm) - 20.04x18.11x12.44(in)
 external dimension 620x520x350(mm) - 24.41x20.47x13.78(in)

lid: 45(mm) - 1.77(in) bottom: 271(mm) - 10.66(in)


Weight:
 empty: 7,55kg - 16.64lbs
 with cubed foam: 10,43kg - 22.99lbs

Temperature rating:
 Minimum -40°C -40°F Maximum +80°C +176°F

Colors:
 Black



TECHNICAL DRAWING

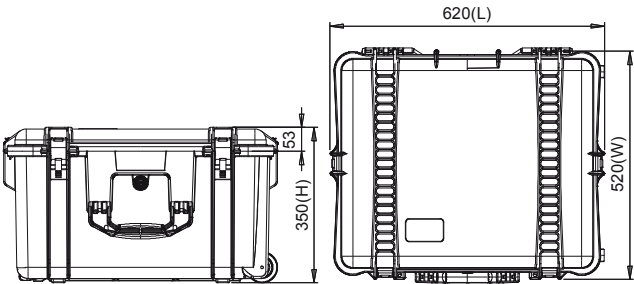

HPRC2700W for Sony PXWZ190V Z190-2700W-01



SONY
 PXWZ190V



- 1 Sony Camcorder PXW-Z190VC
- 2 BC-U1 battery charger
- 3 Battery Sony BPU \Swit S-8U63
- 4 Microphone
- 5 Wireless Audio Set Sony UWP-D11/K51PRO
- 6 Cables/Accessories/Miscellaneous

TECHNICAL FEATURES


Dimension:
 Internal dimension
 555x459x256(mm) - 21.85x18.07x10.08(in)
 External dimension
 620x525x280(mm) - 24.41x20.67x11.02(in)

Weight:
 9,07kg - 19.99lbs

Temperature rating:
 Minimum Maximum
 -40°C -40°F +80°C +176°F



TECHNICAL DRAWING

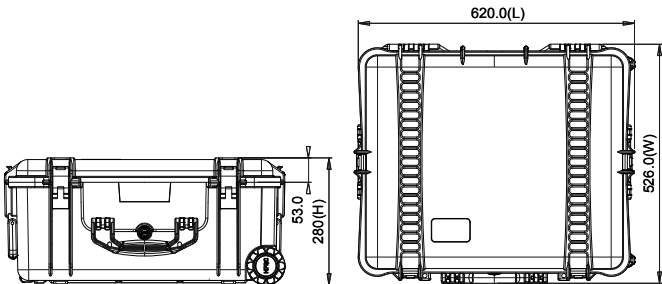



CANON

SPECIAL CASES 2019

HPRC2600 for CANON EOS C100 C100-2600-01



- 1 Canon Eos C100 With Viewfinder and Camera Grip Mounted
- 2 Handle Unit
- 3 Lenses Ef85mm/16-35/24-70/24-105Mm
- 4 Battery Pack Bp 955
- 5 Battery Pack Bp 975
- 6 Battery Charger Cg-940
- 7 Compact Adaptor Ca-941
- 8 Miscellaneous Accessories
- 9 HPRC110Mem

TECHNICAL FEATURES


Dimension:
 internal dimension
 482x358x198(mm) - 18.97x14.09x7.79(in)
 external dimension
 543x419x218(mm) - 21.37x16.49x8.58(in)

Weight:
 5,05kg - 11.13lb

Temperature rating:
 Minimum Maximum
 -40°C -40°F +80°C +176°F



TECHNICAL DRAWING

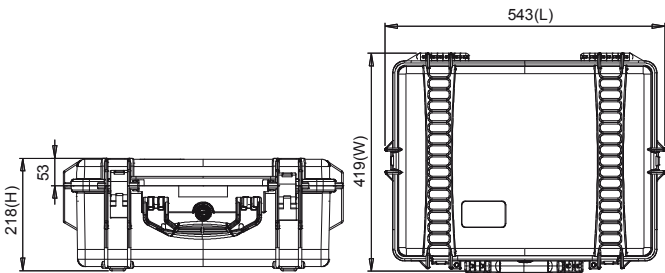

HPRC2600 for CANON EOS C200

C200-2600-01



- 1** Canon Eos C200 With Camera Grip Mounted
- 2** Handle Unit Hdu-2
- 3** Monitor Lcd Lm-V1, Lcd La-V1
- 4** Compact Power Adaptor Ca-A10
- 5** Compact Adaptor Cp200b
- 6** Lenses Ef85mm/16-35/24-70/24-105Mm
- 7** Hprc110Mem
- 8** Battery Pack A30/A60
- 9** Battery Charger A-20
- 10** Miscellaneous Accessories
- 11** Screw
- 12** Allen Key

TECHNICAL FEATURES

Dimension:

internal dimension
482x358x198(mm) - 18.97x14.09x7.79(in)
external dimension
543x419x218(mm) - 21.37x16.49x8.58(in)

Weight:


5,05kg - 11.13lb

Temperature rating:

Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

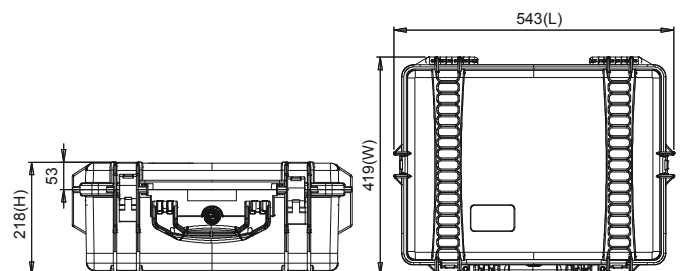





RED

SPECIAL CASES 2019

FOR RED RAVEN



-

Maximum
+80°C +176°F





LEICA

Leica

LEICA

SPECIAL CASES 2019

SUMMILUX-M 1:1.4/35 ASPH.

LEM2400-01



FOR LEICA M




- 1 1 x Leica M Camera Body with Lens Attached
- 2 Electronic Viewfinder
- 3 4 x Lens
- 4 Charger
- 5 Spare Battery
- 6 Cables/Miscellaneous

TECHNICAL FEATURES

Dimension:
internal dimension 380x266x152(mm) - 14.96x10.47x5.98(in)
external dimension 405x330x170(mm) - 15.94x12.99x6.69(in)

Weight:
empty: 2,05kg - 4.52lbs
with foam: 2,38kg - 5.25lbs

Temperature rating:
Minimum -40°C -40°F
Maximum +80°C +176°F

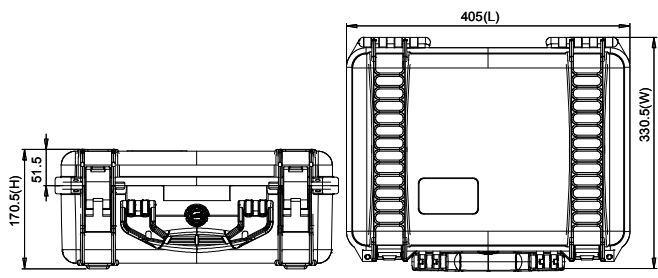

HPRC LEICA M

LEM2460-01




- 1 2 x Leica M Camera Body with Lens Attached
- 2 2 x Electronic Viewfinder
- 3 2 x Spare Batteries
- 4 4 x Lens
- 5 2 x Charger
- 6 Cables/Miscellaneous

TECHNICAL FEATURES

Dimension:
internal dimension 409x306x175(mm) - 16.10x12.05x6.89(in)
external dimension 434x371x193(mm) - 17.09x14.61x7.60(in)

Weight:
empty: 2,60kg - 5.73lbs
with foam: 3,14kg - 6.92lbs

Temperature rating:
Minimum -40°C -40°F
Maximum +80°C +176°F

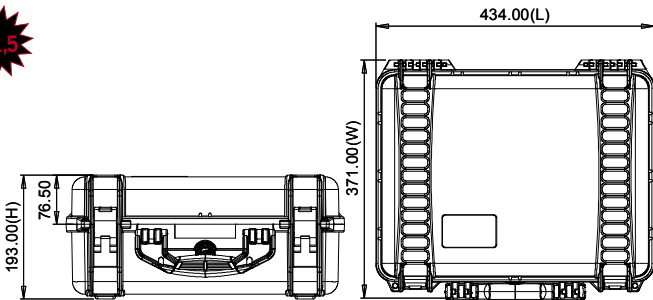





I



BROMPTON

BROMPTON

SPECIAL CASES 2019

BRO4800W-01



1 Brompton Bike

2 Accessories

TECHNICAL FEATURES


Dimension:
internal dimension
720x320x600(mm) - 28.34x12.60x23.62(in)
external dimension
776x380x649(mm) - 30.55x14.96x25.55(in)

Weight:
with foam: 11.60 kg – 25.57 lbs

Temperature rating:
Minimum -40°C -40°F
Maximum +80°C +176°F



TECHNICAL DRAWING

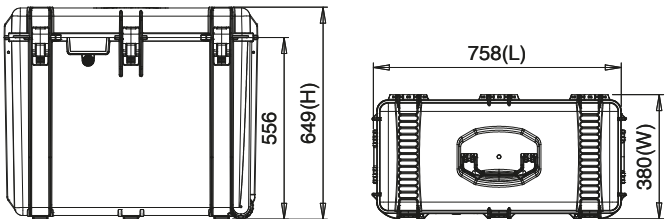



APPLE

SPECIAL CASES 2019

MAC4800W-01

HPRC4800WMAC



- 1 Apple Imac 27"
- 2 Cable
- 3 Keyboard + Mouse



HPRC APPLE IMAC 27"

TECHNICAL FEATURES

Dimension:

internal dimension
720x320x600(mm) - 28.34x12.60x23.62(in)
external dimension
776x380x649(mm) - 30.55x14.96x25.55(in)

Weight:



with foam: 11.60 kg – 25.57 lbs

Temperature rating:

Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING





HPRC®

T U N I N G

Plaber s.r.l. - HPRC cases

Via Div Tridentina, 10
I-36061 Bassano del Grappa
Vicenza - Italy

Tel +39 0424 809150
Fax +39 0424 808548

USA office and warehouse:

Plaber America Inc - HPRC cases

240 Anderson Avenue
07074 Moonachie - New Jersey

Tel +1 201 617 2010
Fax +1 201 617 2001

www.hprc.it | www.hprcusa.com

info@hprc.it

HPRC® Brand owned by:

plaber
I T A L I A

SPECIAL CASES 2019