

plaber®

READY

SPECIAL CASES 2021

We are HPRC. We don't just design and manufacture watertight hard protective cases, we supply carrying solutions. And solutions need to be no-hassle and tailored to your needs.

This is why in Autumn 2013 we designed our first case with a foam specially cut to house the DJI Phantom 1.

Now, almost 8 years later, we are a leading manufacturer of custom cases for drones, gimbals, camcorders and cameras but we feel we are still at the beginning: more is yet to come.



HPRC VECTOR PANEL

The new protective layer system designed for your Ready Case



Made of special PVC based compound, the Vector Panel ensures:

- foam long-last durability and integrity;
- improved protection for the equipment;
- dedicated item slots, suitably marked, avoiding lost tools;
- easy and quick organization of the case;
- savings in space and time;
- professional design and presentation.



The system significantly increases the overall performance and efficiency of the case in any kind of environment, weather conditions and temperature.



SPECIAL CASES 2021

HPRC2710 for DJI Phantom 4

PHA4-2710-02



- 1 DJI Phantom 4 / Pro / 4 Pro + with Props On / 4 V2.0
- 2 Cables / Miscellaneous
- 3 3 x Filters
- 4 Charger + Cables
- 5 2 x Kits of Spare Props
- 6 Spare Battery
- 7 Spare Battery / Miscellaneous Accessories
- 8 Complimentary HPRC1100 for 8 MicroSD Cards
- 9 Ipad Air / Tablet up to 10"
- 10 Controller Monitor Hood for Tablets / Instructions
- 11 Remote Controller
- 12 Cables
- 13 Small Tools

suitable for v 2.0 low noise propellers

TECHNICAL FEATURES

Dimension:

Internal dimension
555x459x256(mm) - 21.85x18.07x10.08(in)
External dimension
617x525x280(mm) - 24.29x20.67x11.02(in)

Weight:


empty: 6.71kg - 14.76lbs

Temperature rating:

Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

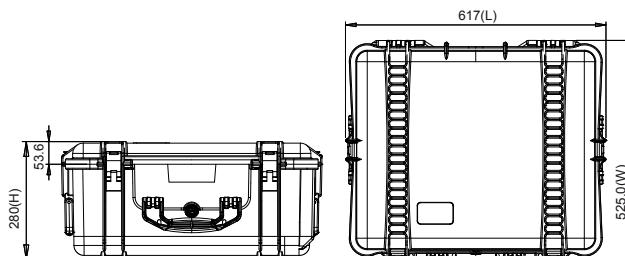

HPRC2700W for DJI Phantom 4 PHA4-2700W-02



- 1 | Phantom 4 / Pro / 4 Pro + with Props On / 4 V2.0
- 2 | Cables / Miscellaneous
- 3 | 3 x Filters
- 4 | Charger + Cables
- 5 | 2 x Kits of Spare Props
- 6 | Spare Battery
- 7 | Spare Battery / Miscellaneous Accessories
- 8 | Complimentary HPRC1100 for 8 MicroSD Cards
- 9 | Ipad Air / Tablet up to 10"
- 10 | Controller Monitor Hood for Tablets / Instructions
- 11 | Remote Controller
- 12 | Cables
- 13 | Small Tools



suitable for v 2.0 low noise propellers


TECHNICAL FEATURES

Dimension:
 Internal dimension
 554,7x458,7x246(mm) - 21.84x18.06x9.69(in)
 External dimension
 617,5x527,3x279,6(mm) - 24.31x20.76x11.0(in)

Weight:
 empty: 7,70kg - 16.98lbs
 with cubed foam: 8,72kg - 19.21lbs


Temperature rating:
 Minimum Maximum
 -40°C -40°F +80°C +176°F

TECHNICAL DRAWING

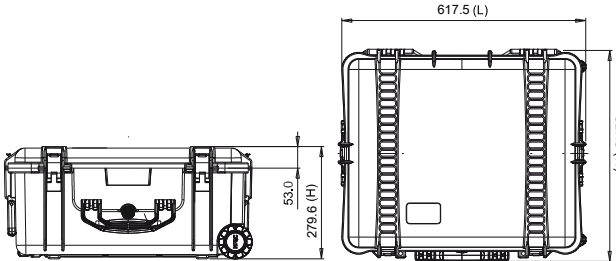

Bag for DJI Phantom 4

PHA4-BAG27-01

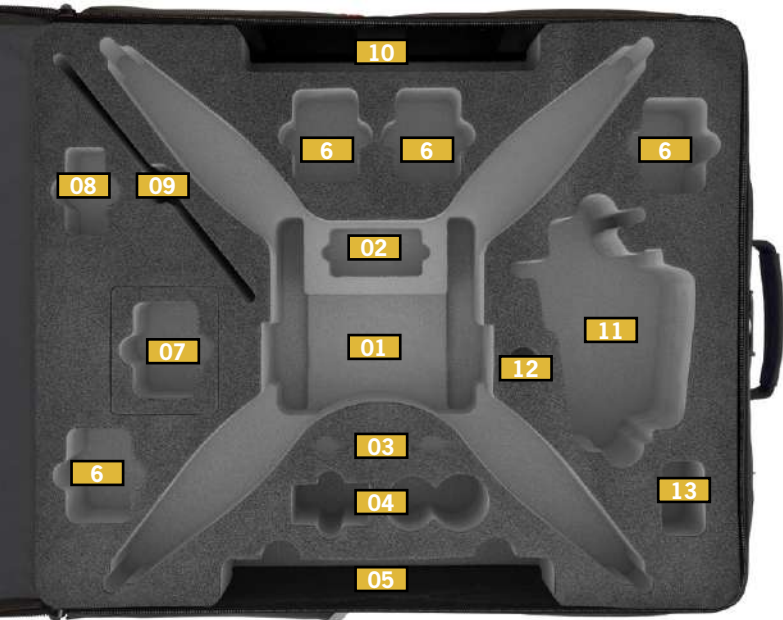

- 1 | Phantom 4 / Pro / 4 Pro + with Props On / 4 V2.0
- 2 | Cables / Miscellaneous
- 3 | 3 x Filters
- 4 | Charger + Cables
- 5 | 2 x Kits of Spare Props
- 6 | Spare Battery
- 7 | Spare Battery / Miscellaneous Accessories
- 8 | Complimentary HPRC1100 for 8 MicroSD Cards
- 9 | Ipad Air / Tablet up to 10"
- 10 | Controller Monitor Hood for Tablets / Instructions
- 11 | Remote Controller
- 12 | Cables
- 13 | Small Tools

suitable for v 2.0 low noise propellers



Dimension: external dimension
560x470x235(mm) - 22.05x18.50x9.25(in)

Weight:
empty: 7,70 kg - 16,98 lbs
with foam: 8,72 kg - 19,21 lbs

HPRC2700W for DJI Phantom 4RTK PHA4RTK-2700W-01



- 1 DjI Phantom 4 RTK / Multispectral
- 2 Intelligent Flight Battery
- 3 Remote Controller
- 4 Ipad Air/Tablet Up to 10"
- 5 Hprc1100 For 8 Microsd Cards
- 6 Charging Hub for WB37
- 7 Battery WB37
- 8 Charging Hub for Int.flight Battery
- 9 AC Power Adapter / Miscellaneous Accessories
- 10 Propellers

suitable for v 2.0 low noise propellers

TECHNICAL FEATURES


Dimension:
 Internal dimension
 554,7x458,7x246(mm) - 21.84x18.06x9.69(in)
 External dimension
 617,5x527,3x279,6(mm) - 24.31x20.76x11.0(in)

Weight:
 empty: 7,75kg - 17.09lbs
 with cubed foam: 9,07kg - 19.99lbs


Temperature rating:
 Minimum Maximum
 -40°C -40°F +80°C +176°F



TECHNICAL DRAWING

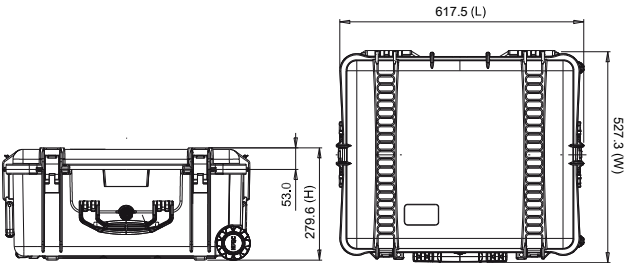

HPRC2780W for DJI Phantom 4 RTK + Ground Station PHA4RTKGS-2780W-01

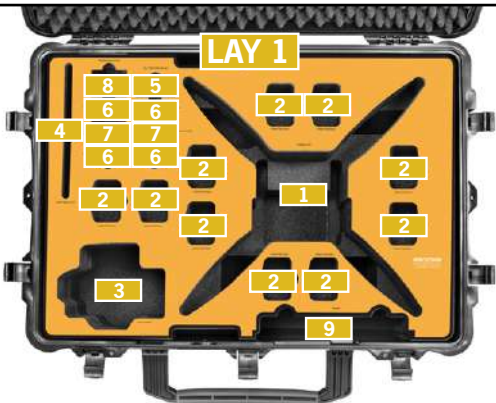

- 1

Dji Phantom 4 RTK / Phantom 4 Multispectral
- 2

Intelligent Flight Battery
- 3

Remote Controller
- 4

Ipad Air/Tablet up to 10"
- 5

Hprc 1100 for 8 MicroSD Card
- 6

Battery WB37
- 7

Charging Hub for WB37
- 8

Miscellaneous Accessories
- 9

Propellers
- 10

D-RTK 2 Body
- 11

Charging Hub for Int.flight Battery/AC Power Adapter
- 12

Miscellaneous Accessories
- 13

Mobile Phone Holder

TECHNICAL FEATURES


Dimension:
 Internal dimension
 748,6x524,6x363,3(mm) - 29.47x20.65x14.3(in)
 External dimension
 814x586,5x387,7(mm) - 32.05x23.09x15.27(in)

Weight:
 empty: 12,0 kg - 26.46 lbs
 with foam: 14,49 kg – 31.94 lbs

Temperature rating:
 Minimum Maximum
 -40°C -40°F +80°C +176°F



TECHNICAL DRAWING

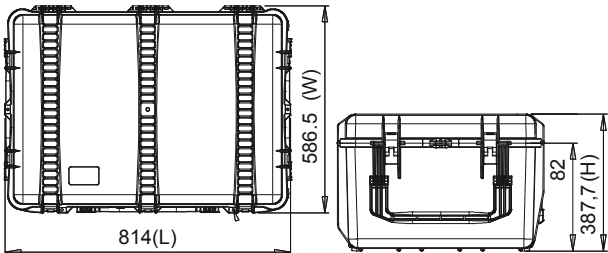

HPRC6500W for DJI D-RTK 2 DRTK6500W-01



- 1 D-RTK 2 Body
- 2 Accessories Box (Mobile Phone Holder; Charging Hub, Intelligent Battery, Battery Cover, Ac Power Adapter\Cable etc)
- 3 Extention Rod
- 4 Tripod

TECHNICAL FEATURES


Dimension:
 Internal dimension
 1280,7x279x242,8(mm) - 50.42x10.98x9.56(in)
 External dimension
 1328x335x299,8(mm) - 52.28x13.19x11.8(in)

Weight:
 empty: 7,2kg - 15.88lbs
 with cubed foam: 9,03kg - 19.90lbs

Temperature rating:
 Minimum Maximum
 -40°C -40°F +80°C +176°F



TECHNICAL DRAWING

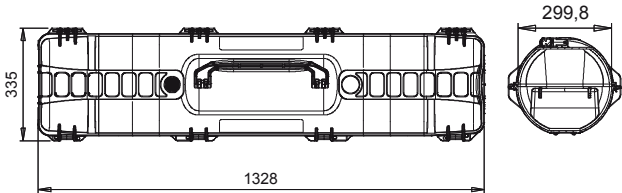



4 READY

HPRC2800W for DJI Matrice 300 RTK

M300-2800W-01



LAY 1



LAY 2



- 1** DJI Matrice 300 RTK in Landing Mode (2 Gimbal and 2 Batteries mounted)
- 2** Dry Keeper
- 3** DJI Smart Controller Enterprise (Battery Attached)
- 4** H20T Gimbal/Miscellaneous
- 5** Tablet up to 11" or CrystalSky 7.85" with sun hood mounted

- 6** Propellers
- 7** WB37 Intelligent Battery
- 8** TB60 Intelligent Flight Battery



TECHNICAL FEATURES

Dimension:

Internal dimension
748,6x524,6x454,6(mm) - 29.47x20.65x17.9(in)
External dimension
813,3x586,5x480,5(mm) - 32.02x23.9x18.92(in)

Weight:


empty: 13,20 kg - 29.10 lbs
with foam: 15,84 kg - 34.91 lbs

Temperature rating:

Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

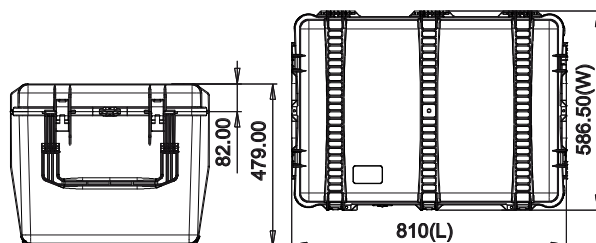

HPRC2800W for DJI Matrice 600 or Matrice 600 PRO M600-2800W-01



- 1** DJI Matrice 600 // Matrice 600 Pro (Batteries TB47S Attached)
- 2** Hex Charger
- 3** Remote Controller
- 4** Landing Gear
- 5** Cable
- 6** Landing Gear



TECHNICAL FEATURES

Dimension:

Internal dimension
 748,6x524,6x454,6(mm) - 29.47x20.65x17.9(in)
 External dimension
 813,3x586,5x480,5(mm) - 32.02x23.9x18.92(in)

Weight:


empty: 13,20 kg - 29.10 lbs
 with foam: 15,31 kg - 33.75 lbs

Temperature rating:

Minimum Maximum
 -40°C -40°F +80°C +176°F



TECHNICAL DRAWING

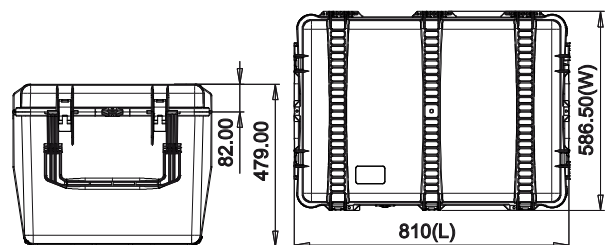

 READY



HPRC2550W for Battery DJI Matrice 300 RTK BAT2550W-03



- 1 TB60 Intelligent Flight Battery
- 2 WB37 Intelligent Battery
- 3 Various/Perfect for Dry Keeper



HPRC DJI BATTERY CASES

TECHNICAL FEATURES


Dimension:
internal dimension
513x288x200(mm) - 20.19x11.34x7.87(in)
external dimension
549x346x236(mm) - 21.61x13.62x9.29(in)

Weight:
empty: 4.35kg - 9.57lbs

Temperature rating:
Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

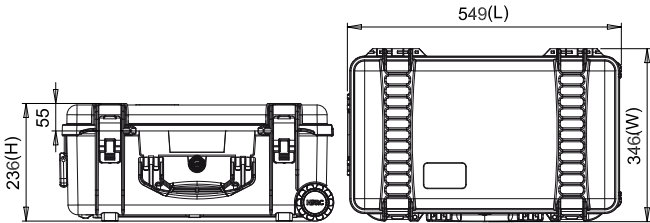

HPRC4600W for DJI Matrice 200/210 v.2.0

M210-4600W-04



LAY 1

LAY 2



LAY 1



LAY 2

- 1** DJI Matrice 200/210 v.2.0 with 1 Gimbal Connector, 2 cameras, 2 GPS kit, 2 batteries TB55 mounted
- 2** Cendence Remote Controller
- 3** Cendence Remote Controller
- 4** CrystalSky Battery (WB37)
- 5** Charging Hub for CrystalSky (WCH2)
- 6** CrystalSky 7.85" with sun hood mounted
- 7** Charging Hub (IN2)
- 8** x 1 battery TB55
- 9** Battery Charger
- 10** x 4 Propellers Air

- 11** x 1 battery TB55
- 12** Small Accessories



TECHNICAL FEATURES

Dimension:

internal dimension
611x611x375(mm) - 24.05x24.05x14.76(in)
external dimension
670x677x418.5(mm) - 26.38x26.65x16.48(in)

Weight:

empty: 9,9kg - 21.83lbs


Temperature rating:

Minimum Maximum
-40°C -40°F +80°C +176°F

TECHNICAL DRAWING



W

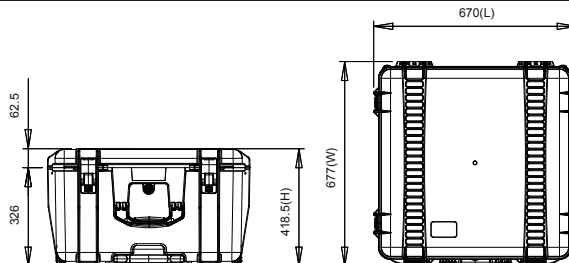

HPRC2550W Battery Case for DJI Matrice 200/210 v.2.0 **BAT-2550W-02**



dji
 BATTERY CASE
 FOR DJI Matrice 210/v 2.0



- 1 Charging Hub
- 2 Battery Charger
- 3 Battery TB50 or TB55
- 4 Charging Hub for CristalSky (WCH2)
- 5 CrystalSky Battery (WB37)



TECHNICAL FEATURES

Dimension:

internal dimension
 513x288x200(mm) - 20.19x11.34x7.87(in)
 external dimension
 549x346x236(mm) - 21.61x13.62x9.29(in)

Weight:


empty: 4.35kg - 9.57lbs

Temperature rating:

Minimum Maximum
 -40°C -40°F +80°C +176°F




TECHNICAL DRAWING

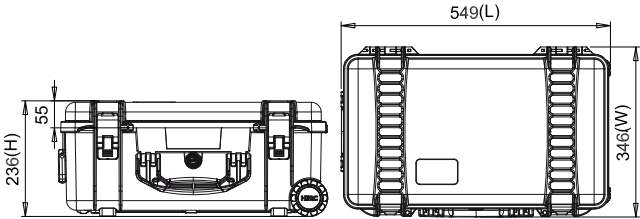


HPRC DJI BATTERY CASES

HPRC2780W for DJI Inspire 2 INS2-2780W-02

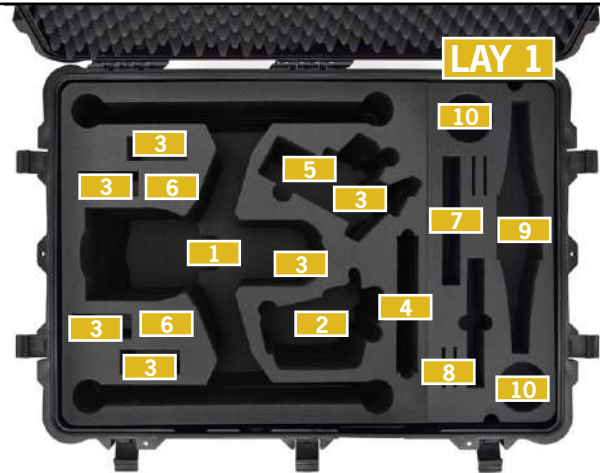

- 1 DJI Inspire 2 in Landing Mode with Gimbal X7 Attached
- 2 Transmitter (Radio Controller)
- 3 Spare Flight Battery
- 4 Crystal Monitor 7.85"
- 5 Cendence Remote Controller
- 6 SSD
- 7 Charger
- 8 Filters
- 9 Props + Spare Props
- 10 Charging Hub

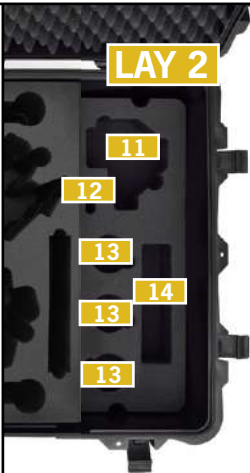

- 11 Gimbal
- 12 Gimbal's Lid
- 13 Lens
- 14 Cables / Miscellaneous



- 15 Miscellaneous / Small Accessories

TECHNICAL FEATURES

Dimension:

Internal dimension
 748,6x524,6x363,3(mm) - 29.47x20.65x14.3(in)
 External dimension
 814x586,5x387,7(mm) - 32.05x23.09x15.27(in)

Weight:


empty: 12,22kg - 26.94lbs
 with cubed foam: 14,63kg - 32.24lbs

Temperature rating:

Minimum Maximum
 -40°C -40°F +80°C +176°F



TECHNICAL DRAWING

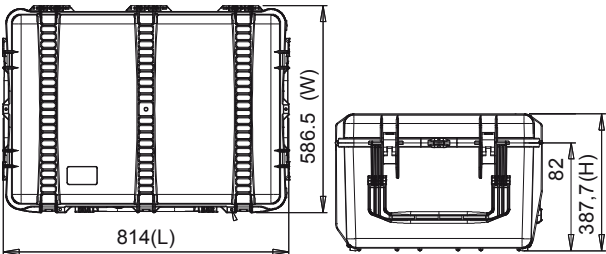

HPRC4600 for DJI Inspire 2 INS2-4600W-02



- 1 DJI Inspire 2 in Landing Mode with Gimbal X7 Attached
- 2 Standard Radio Controller
- 3 Spare Flight Battery
- 4 Ipad Mini / Tablet up to 7.9"
- 5 Props + Spare Props
- 6 Charger
- 7 SSD
- 8 CrystalSky 7.85"

TECHNICAL FEATURES

Dimension:
 Internal dimension
 611x611x375(mm) - 24.05x24.05x14.76(in)
 external dimension
 670x677x418,5(mm) - 26.38x26.65x16.48(in)


Weight:
 empty: 10,85 kg - 23.92 lbs
 with foam: 12,90 kg - 28.43 lbs

Temperature rating:
 Minimum Maximum
 -40°C -40°F +80°C +176°F




- 9 Gimbal
- 10 Battery
- 11 Cables / Miscellaneous
- 12 Lens
- 13 Crystal Monitor
- 14 Charging Hub
- 15 Cendence Remote Controller

TECHNICAL DRAWING

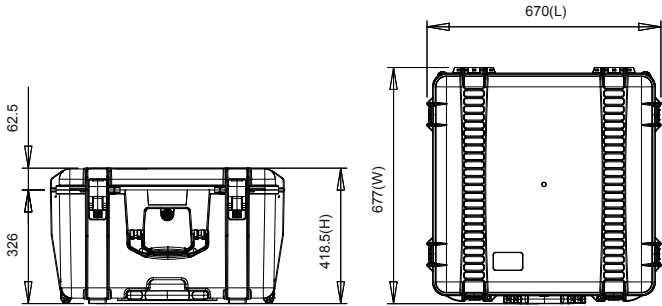

HPRC2550 for DJI inspire 2 BAT-2550W-01

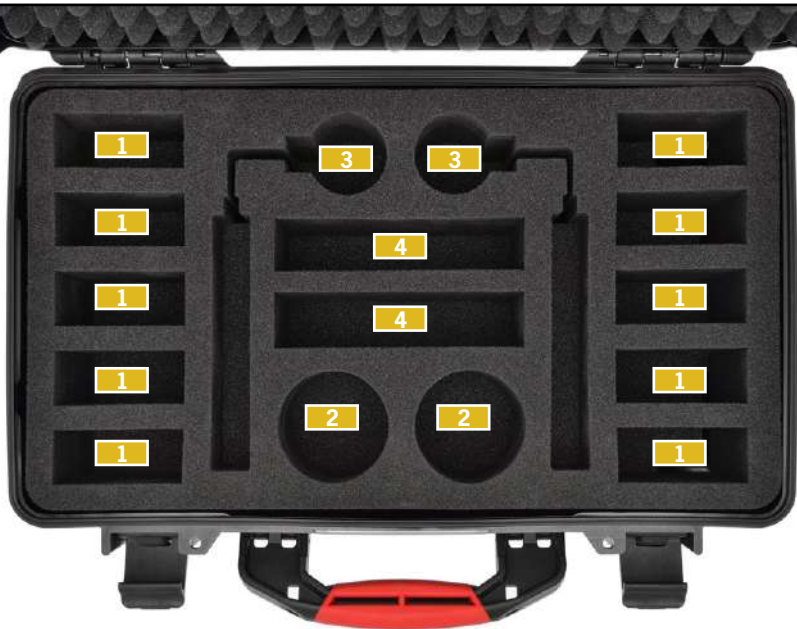

- 1 Battery for DJI Inspire 2
- 2 Charger Hub
- 3 Battery Charger
- 4 Miscellaneous



TECHNICAL FEATURES

Dimension:

internal dimension
 513x288x200(mm) - 20.19x11.34x7.87(in)
 external dimension
 549x346x236(mm) - 21.61x13.62x9.29(in)

Weight:


empty: 4,35kg - 9.57lbs

Temperature rating:

Minimum Maximum
 -40°C -40°F +80°C +176°F



TECHNICAL DRAWING

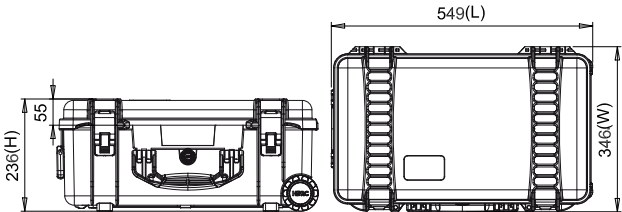

HPRC2300 for DJI Smart Controller Enterprise

SCE-2300-01



- 1 DJI Smart Controller Enterprise
- 2 Miscellaneous
- 3 Wb37 Intelligent Battery



HPRC DJI SMART CONTROLLER

TECHNICAL FEATURES

Dimension:

Internal dimension
305,7x232,4x137,5(mm) - 12.04x9.15x5.41(in)
External dimension
334,6x303x155,2(mm) - 13.17x11.93x6.11(in)

Weight:


empty: 1,75kg - 3.86lbs

Temperature rating:

Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

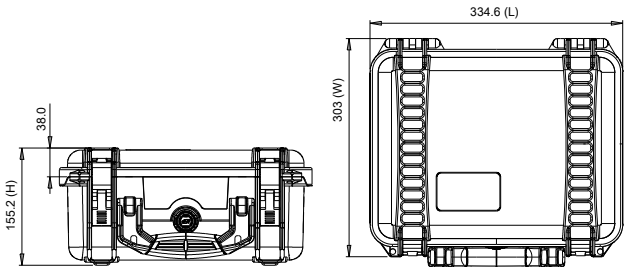

HPRC2460 for DJI Cendence CEN2460-02



- 1 Cendence Remote Controller
- 2 CrystalSky 7.85"
- 3 Battery Charger
- 4 Charging hub for CrystalSky
- 5 CrystalSky Battery



TECHNICAL FEATURES

Dimension:


internal dimension
409x306x175(mm) - 16.1x12.05x6.89(in)
external dimension
435x377,8x193(mm) - 17.13x14.87x7.60(in)

Weight:

empty: 2,57kg - 5.65lbs
with cubed foam: 2,88kg - 6.35lbs

Temperature rating:

Minimum Maximum
-40°C -40°F +80°C +176°F

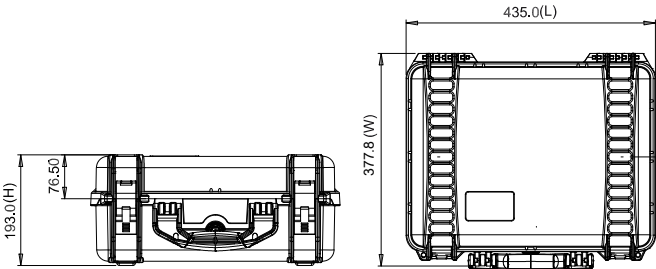

HPRC2400 for DJI Mavic 2

MAV2-2400BLK-02



- 1 Smart Controller/Battery Charger, Cables
- 2 Remote Controller/Battery Charger, Cables
- 3 Battery Charger/Adapter, Various
- 4 DJI Mavic 2 (Intelligent Flight Battery and Gimbal Protector Included)
- 5 Propellers
- 6 Usb Adapter
- 7 Little Accessories
- 8 Usb Power Adapter/cable
- 9 Intelligent Flight Batteries



TECHNICAL FEATURES


Dimension:
internal dimension
377x263,9x150,8(mm) - 14.84x10.39x5.94(in)
external dimension
402x330,5x169,2(mm) - 15.83x13.01x6.66(in)

Weight:
empty: 2,38 kg - 5.25 lbs
with foam: 2,47 kg - 5.45 lbs

Temperature rating:
Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

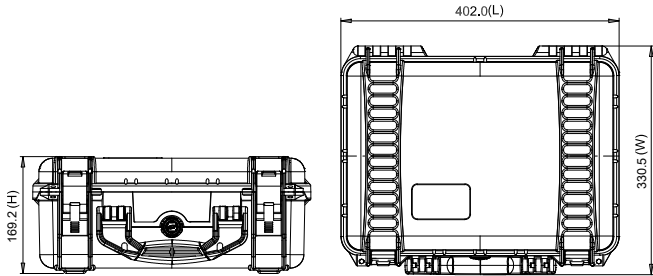

HPRC3500 for DJI Mavic 2 MAV2-3500BLK-02



- 1 DJI Mavic 2 (Intelligent Flight Battery and Gimbal Protector Included)
- 2 Remote Controller/Smart Controller
- 3 Intelligent Flight Batteries
- 4 Usb Power Adapter/cable
- 5 Mavic 2 Car Charger
- 6 Battery Charging Hub /Adapter, Various
- 7 Various / Usb Adaptor
- 8 Cables
- 9 Battery Charging Hub /Adapter, Various

TECHNICAL FEATURES


Dimension:
 internal dimension
 433,5x319,3x168,8(mm) - 17.07x12.57x6.65(in)
 external dimension
 497,9x370,3x184,9(mm) - 19.6X14.58x7.28(in)

Weight:
 empty: 3,20 kg - 7.04 lbs
 with foam: 3,61 kg - 7.95 lbs

Temperature rating:
 Minimum Maximum
 -40°C -40°F +80°C +176°F



TECHNICAL DRAWING

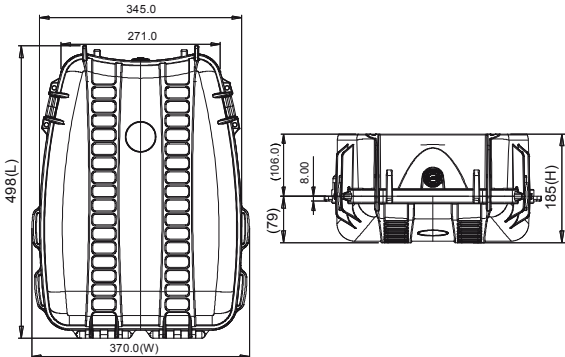

Bag for DJI Mavic 2

MAVBAG35-03



- 1 DJI Mavic 2 (Intelligent Flight Battery and Gimbal Protector Included)
- 2 Remote Controller/Smart Controller
- 3 Intelligent Flight Batteries
- 4 Usb Power Adapter/cable
- 5 Mavic 2 Car Charger
- 6 Battery Charging Hub /Adapter, Various
- 7 Various / Usb Adaptor
- 8 Cables
- 9 Battery Charging Hub /Adapter, Various

TECHNICAL FEATURES

Dimension:

internal dimension
433x319x169(mm) - 17.05x12.56x6.65(in)
external dimension
498x370x185(mm) - 19.61x14.57x7.28(in)

Weight:

empty: 0,71 kg - 1,57 lbs
with foam: 0,91 kg - 2.01 lbs



HPRC DJI MAVIC 2

HPRC2400 for DJI Air 2S and Mavic Air 2 MAV2A-2400-02



- 1 DJI Air 2S and Mavic Air 2
- 2 Intelligent Flight Battery
- 3 Battery Charging Hub
- 4 Propellers
- 5 Battery to Power Bank Adaptor
- 6 ND Filter Set
- 7 Remote Controller/Smart controller
- 8 Battery Charger
- 9 Cable



HPRC DJI MAVIC MINI

TECHNICAL FEATURES


Dimension:
 internal dimension
 377x263,9x150,8(mm) - 14.84x10.39x5.94(in)
 external dimension
 402X330,5X169,2(mm) - 15.83x13.01x6.66(in)

Weight:
 empty: 2,38 kg - 5.25 lbs
 with foam: 2,49 kg - 5.49 lbs

Temperature rating:
 Minimum -40°C -40°F
 Maximum +80°C +176°F



TECHNICAL DRAWING

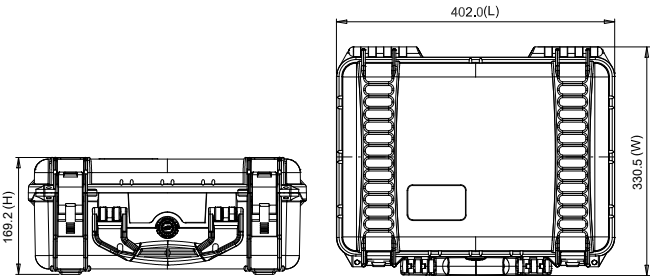

HPRC2300 for DJI Air 2S and Mavic Air 2 Fly More Combo MAV2A-2300-01



- 1 DJI Air 2S and Mavic Air 2 Fly More Combo
- 2 Battery Charger
- 3 Intelligent Flight Battery
- 4 Remote Controller/Smart Controller
- 5 Propellers
- 6 Nd Filter Set
- 7 Cable



HPRC DJI MAVIC MINI

TECHNICAL FEATURES


Dimension:
 Internal dimension
 305,7x232,4x137,5(mm) - 12.04x9.15x5.41(in)
 External dimension
 334,6x303x155,2(mm) - 13.17x11.93x6.11(in)

Weight:
 empty: 1,75 kg - 3.86 lbs
 with foam: 1,88 kg - 4.13 lbs

Temperature rating:
 Minimum Maximum
 -40°C -40°F +80°C +176°F



TECHNICAL DRAWING

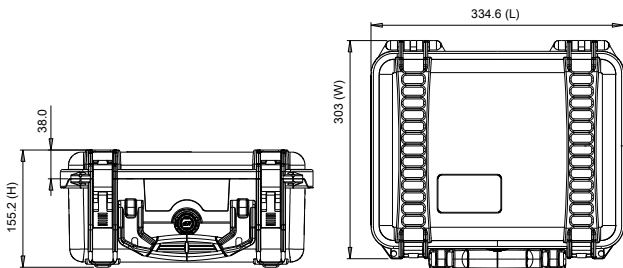

HPRC3500 for DJI Air 2S and Mavic Air 2 Fly More Combo **MAV2A-3500-01**



- 1** DJI Air 2S and Mavic Air 2 Fly More Combo
- 2** Intelligent Flight Battery
- 3** Nd Filter Set
- 4** Battery Charging Hub
- 5** Cable
- 6** Battery to Power, Bank Adaptor
- 7** Propellers
- 8** Miscellaneous
- 9** Remote Controller/Smart Controller
- 10** Battery Charger

TECHNICAL FEATURES


Dimension:
 internal dimension
 433,5x319,3x168,8(mm) - 17.07x12.57x6.65(in)
 external dimension
 497,9x370,3x184,9(mm) - 19.6x14.58x7.28(in)

Weight:
 empty: 3,00kg - 6.61lbs
 with cubed foam: 3,55kg - 7.82lbs

Temperature rating:
 Minimum Maximum
 -40°C -40°F +80°C +176°F




TECHNICAL DRAWING

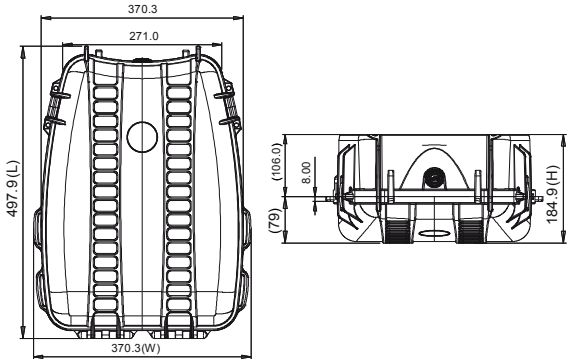

Bag for DJI Air 2S and Mavic Air 2 Fly More Combo

MAVBAG35-04

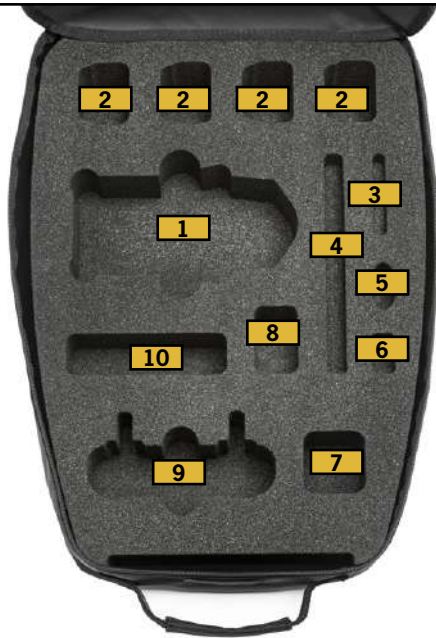

- 1 DJI Air 2S and Mavic Air 2 Fly More Combo
- 2 Intelligent Flight Battery
- 3 Nd Filter Set
- 4 Battery Charging Hub
- 5 Cable
- 6 Battery to Power, Bank Adaptor
- 7 Propellers
- 8 Miscellaneous
- 9 Remote Controller/Smart Controller
- 10 Battery Charger

TECHNICAL FEATURES

Dimension:
internal dimension
433x319x169(mm) - 17.05x12.56x6.65(in)
external dimension
498x370x185(mm) - 19.61x14.57x7.28(in)



HPRC2300 FOR DJI Mini 2 Combo Fly More MAVM-2300-02



- 1 Aircraft
- 2 Cable/Miscellaneous
- 3 Intelligent Flight Battery
- 4 DJI 18W USB Charger
- 5 Two-Way Charging Hub
- 6 Remote Controller
- 7 Propellers



TECHNICAL FEATURES


Dimension:
Internal dimension
305,7x232,4x137,5(mm) - 12.04x9.15x5.41(in)
External dimension
334,6x303x155,2(mm) - 13.17x11.93x6.11(in)

Weight:
empty: 1,77kg - 3.89lbs
with cubed foam: 1,96kg - 4.32lbs

Temperature rating:
Minimum
-40°C -40°F
Maximum
+80°C +176°F



TECHNICAL DRAWING

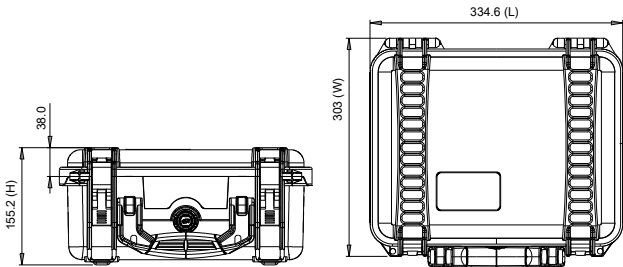



HPRC2500 for DJI FPV Combo

FPV-2500-01



- 1
- DJI FPV Drone

2

 Goggles Battery

3

 Fly More kit

4

 Goggles V2 with Goggles Antenna (or TrueRC) mounted

5

 Remote Controller

6

 Motion Controller

7

 AC Power Adaptor

8

 Intelligent Flight Battery

9

 Propellers (Pair)/Cable

HPRC DJI FPV DRONE

TECHNICAL FEATURES


Dimension:
internal dimension
449,8x322,9x174,9(mm) - 17.71x12.71x6.89(in)
external dimension
478,1x389,4x194(mm) - 18.82x15.33x7.64(in)

Weight:
empty: 3,22kg - 7.10lbs
with cubed foam: 3,69kg - 8.12lbs

Temperature rating:
Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

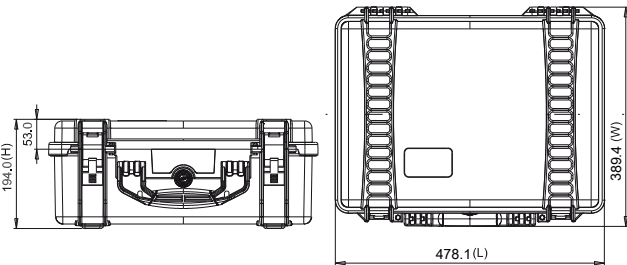


HPRC3600 for DJI FPV Combo

FPV-3600-01

NEW



HPRC
VECTOR PANEL

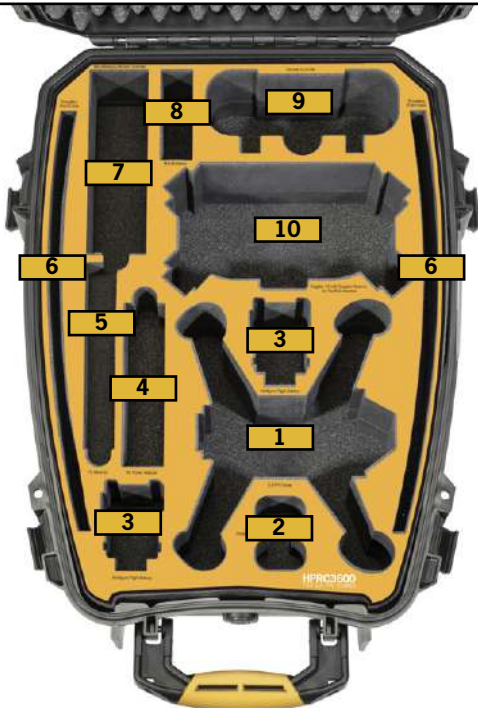

- 1 DJI FPV Drone
- 2 Goggles Battery
- 3 Intelligent Flight Battery
- 4 AC Power Adaptor
- 5 Fly More kit
- 6 Propellers (Pair)/Cable
- 7 Miscellaneous/Motion Controller
- 8 Miscellaneous
- 9 Remote Controller
- 10 Goggles V2 with Goggles Antenna (or TrueRC) mounted

TECHNICAL FEATURES


Dimension:
Internal dimension
479x354x194(mm) - 18.86x13.94x7.64(in)
External dimension
542x402x220(mm) - 21.34x15.83x8.66(in)

Weight:
empty: 3,23 kg - 7,11 lbs
with foam: 3,75 kg - 8,26 lbs

Temperature rating:
Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

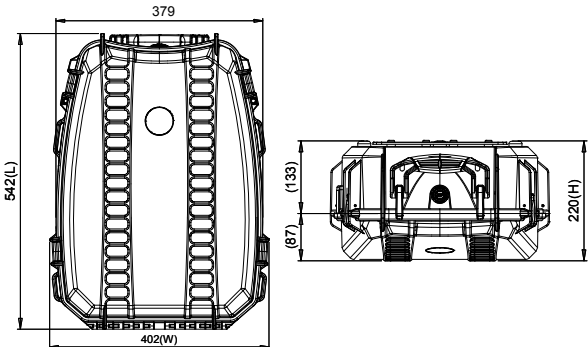

HPRC DJI FPV DRONE



HPRC 1400 for DJI POCKET 2 CREATIVE COMBO KIT OSMPKT-1400-02



- 1** DJI Pocket 2 with 1/4"-20 Tripod Mounted
- 2** Micro Tripod
- 3** Mini Control Stick
- 4** Cable/Wireless Microphone Windscreen
- 5** Do-it-All Handle
- 6** Wireless Microphone Transmitter/SD Card
- 7** Wide-Angle Lens
- 8** Lightning (iOS) Smartphone Adapter/ USB Type-C Smartphone Adapter

TECHNICAL FEATURES

Dimension:

internal dimension
180x110x40(mm) - 7.08x4.33x1.57(in)
external dimension
200,3x142,4x48(mm) - 7.89x5.61x1.89(in)

Weight:


empty: 0,26kg - 0.57lbs

Temperature rating:

Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

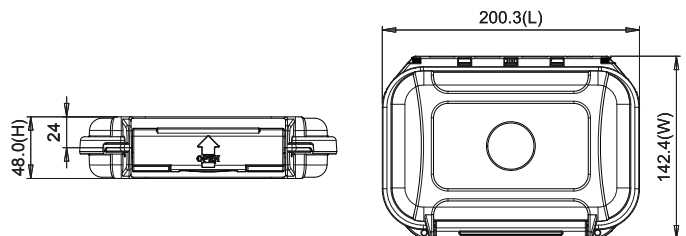

HPRC1400 for DJI OSMO POCKET OSMPKT-1400-01



- 1 DJI Osmo Pocket
- 2 Accessories / Power Cable
- 3 SD Card Rack
- 4 Smartphone adapters

HPRC DJI OSMO POCKET

TECHNICAL FEATURES


Dimension:
 internal dimension
 180x110x40(mm) - 7.08x4.33x1.57(in)
 external dimension
 200,3x142,4x48(mm) - 7.89x5.61x1.89(in)

Weight:
 empty: 0,26kg - 0.57lbs

Temperature rating:
 Minimum Maximum
 -40°C -40°F +80°C +176°F



TECHNICAL DRAWING

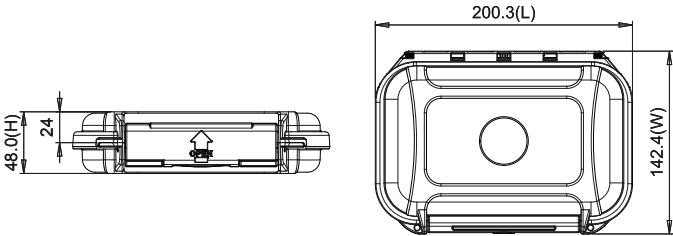

HPRC1400 for DJI OSMO ACTION OSMACT-1400-01




- 1 Osmo Action and Camera Frame
- 2 Battery
- 3 Quick Release Base
- 4 SD Card Rack
- 5 USB-C Cable Flat
- 6 Locking Screw

TECHNICAL FEATURES

Dimension:
 internal dimension
 180x110x40(mm) - 7.08x4.33x1.57(in)
 external dimension
 200,3x142,4x48(mm) - 7.89x5.61x1.89(in)
Weight:
 empty: 0,26kg - 0.57lbs
Temperature rating:
 Minimum Maximum
 -40°C -40°F +80°C +176°F



TECHNICAL DRAWING

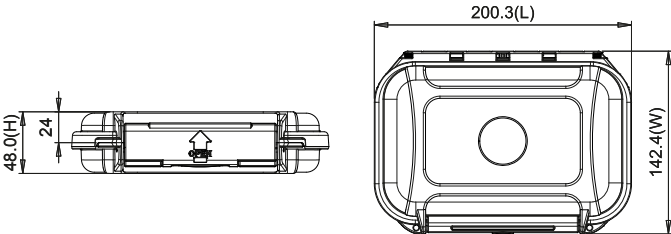

HPRC2460 for DJI Goggles GGS-2460-01




- 1 Headband
- 2 DJI Goggles Body
- 3 Cables / Miscellaneous Accessories
- 4 Eu Charger
- 5 Uk Charger

TECHNICAL FEATURES


Dimension:
 internal dimension
 409x306x175(mm) - 16.1x12.05x6.89(in)
 external dimension
 435x377,8x193(mm) - 17.13x14.87x7.60(in)

Weight:
 empty: 2,57kg - 5.65lbs
 with cubed foam: 2,90kg - 6.38lbs

Temperature rating:
 Minimum Maximum
 -40°C -40°F +80°C +176°F

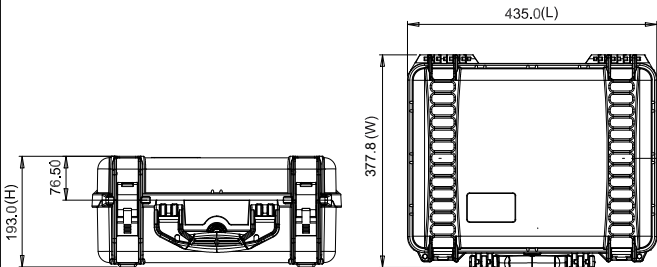

HPRC2500 for DJI RSC 2 Pro Combo RSC2-2500-01

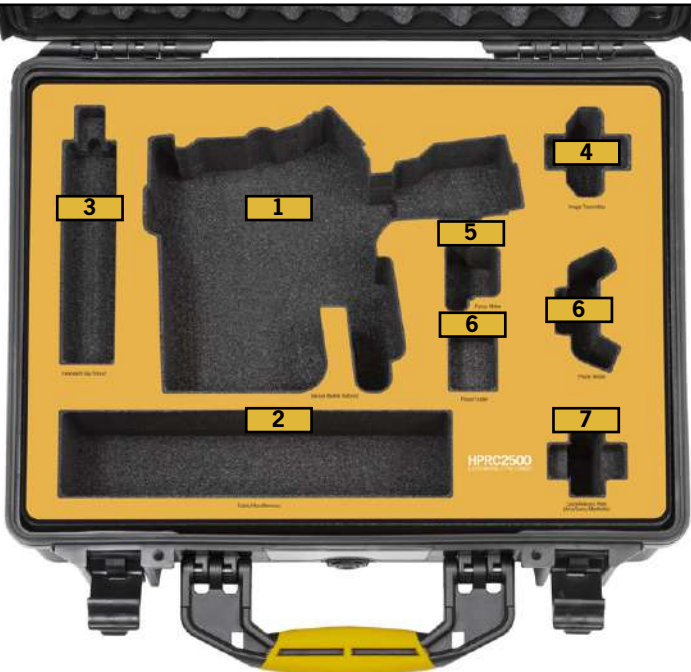

- 1 Gimbal (Built-In Battery)
- 2 Cable/Miscellaneous
- 3 Extended Grip/Tripod
- 4 Image Transmitter
- 5 Focus Motor
- 6 Phone Holder
- 7 Quick-Release Plate (Arca-Swiss/Manfrotto)

HPRC DJI RSC 2 PRO COMBO

TECHNICAL FEATURES


Dimension:
 internal dimension
 449,8x322,9x174,9(mm) - 17.71x12.71x6.89(in)
 external dimension
 478,1x389,4x194(mm) - 18.82x15.33x7.64(in)

Weight:
 empty: 3,22kg - 7.10lbs
 with cubed foam: 3,78kg - 8.33lbs


Temperature rating:
 Minimum Maximum
 -40°C -40°F +80°C +176°F



TECHNICAL DRAWING

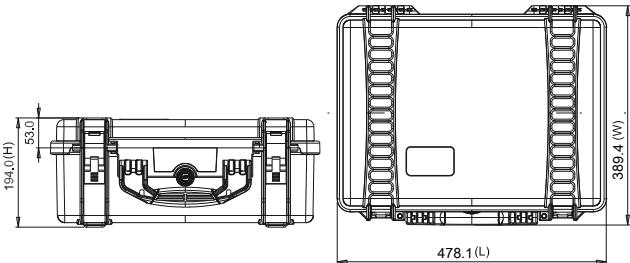

HPRC2500 for DJI RS 2 Pro Combo RS2-2500-01

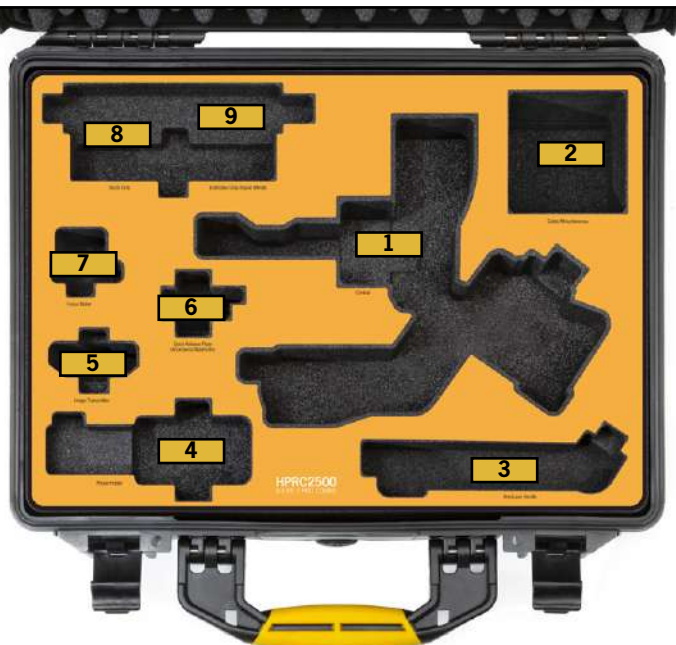

- 1 Gimbal
- 2 Cable/Miscellaneous
- 3 Briefcase Handle
- 4 Phone Holder
- 5 Image Transmitter
- 6 Quick-Release Plate (Arca-Swiss/Manfrotto)
- 7 Focus Motor
- 8 BG30 Grip
- 9 Extended Grip/Tripod (Metal)



TECHNICAL FEATURES

Dimension:

internal dimension
449,8x322,9x174,9(mm) - 17.71x12.71x6.89(in)
external dimension
478,1x389,4x194(mm) - 18.82x15.33x7.64(in)

Weight:


empty: 3,22kg - 7.10lbs
with cubed foam: 3,79kg - 8.34lbs

Temperature rating:

Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

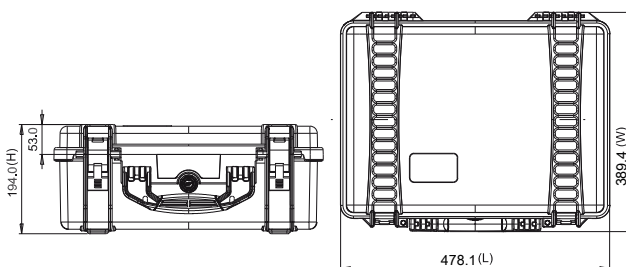

HPRC3500 for DJI RS 2 Pro Combo RS2-3500-01



- 1 Gimbal
- 2 Cable/Miscellaneous
- 3 Quick-Release Plate (Arca-Swiss/Manfrotto)
- 4 Briefcase Handle
- 5 BG30 Grip/ Extended Grip/Tripod (Metal)
- 6 Phone Holder
- 7 Cable/Miscellaneous

TECHNICAL FEATURES


Dimension:
 internal dimension
 433x319x168,8(mm) - 17.07x12.57x6.65(in)
 external dimension
 497,9x370,3x184,9(mm) - 19.6x14.58x7.28(in)

Weight:
 empty: 3.00kg - 6.61lbs
 with cubed foam: 3,55kg - 7.82lbs


Temperature rating:
 Minimum Maximum
 -40°C -40°F +80°C +176°F



TECHNICAL DRAWING

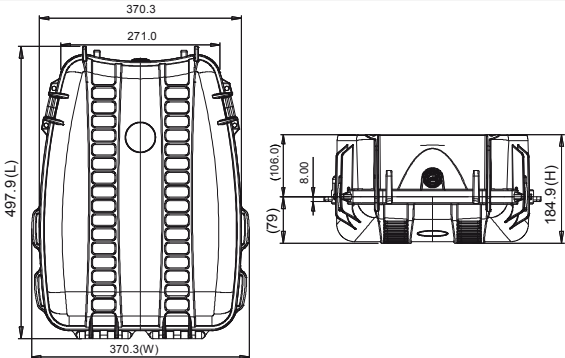

HPRC Bag for DJI RS 2 Pro Combo RS2-BAG35-01

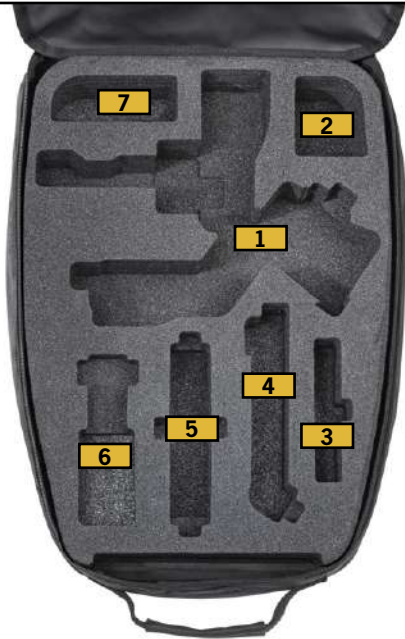

- 1** Gimbal
- 2** Cable/Miscellaneous
- 3** Quick-Release Plate (Arca-Swiss/Manfrotto)
- 4** Briefcase Handle
- 5** BG30 Grip/ Extended Grip/Tripod (Metal)
- 6** Phone Holder
- 7** Cable/Miscellaneous

TECHNICAL FEATURES

Dimension:

internal dimension
 433x319x169(mm) - 17.05x12.56x6.65(in)
 external dimension
 498x370x185(mm) - 19.61x14.57x7.28(in)





READY



READY

HPRC2730W for DJI Robomaster S1 ROB-2730W-01



- 1 Robomaster
- 2 Tablet up to 12,9"
- 3 Charger Cable
- 4 Battery
- 5 Protective Glasses
- 6 Gel Beads Container
- 7 Gel Beads Bottle
- 8 Cup
- 9 Gamepad
- 10 Tape
- 11 Miscellaneous\Small Accessories
- 12 Battery Charger
- 13 Vision Markers (Cardboard Signs)



HPRC DJI ROBOMASTER S1

TECHNICAL FEATURES


Dimension:
 internal dimension
 503x459x316(mm) - 19.80x18.07x12.44(in)
 external dimension
 616,9x531x349,6(mm) - 24.29x20.91x13.76(in)

Weight:
 empty: 8,41kg - 18.54lbs
 with cubed foam: 10,43kg - 22.99lbs

Temperature rating:
 Minimum Maximum
 -40°C -40°F +80°C +176°F



TECHNICAL DRAWING

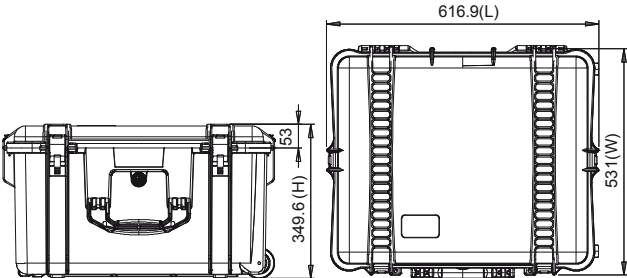



AUTEL ROBOTICS

SPECIAL CASES 2021

HPRC2400 Autel Robotics EVO II 6K / 8K Drone

EV02-2400-02



- 1 Autel Robotics EVO II 6K / 8K with propellers - low noise
- 2 Remote Controller
- 3 Battery Charging Hub
- 4 Flight Battery
- 5 Cable/Propellers/Accessories
- 6 Micro USB Cable
- 7 Charger

TECHNICAL FEATURES


Dimension:
Internal dimension
377x263,9x150,8(mm) - 14.84x10.39x5.94(in)
External dimension
402x330,5x169,2(mm) - 15.83x13.01x6.66(in)

Weight:
empty: 2,38kg - 5.25lbs

Temperature rating:
Minimum
-40°C -40°F
Maximum
+80°C +176°F



TECHNICAL DRAWING

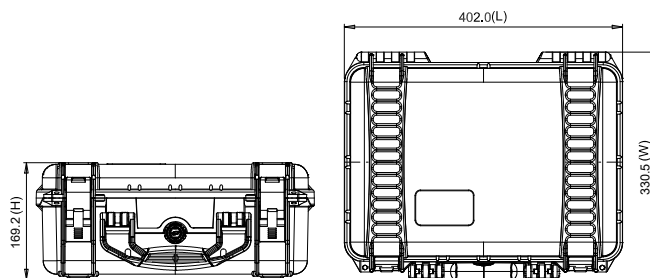



ATOMOS



SPECIAL CASES 2021

HPRC2300 for Atomos Ninja V NJAV-2300-01



- 1 Ninja Atomos V with AtomX SSD mini and Battery mounted
- 2 Ninja V Sunhood
- 3 Battery
- 4 12V-3A AC Power Supply
- 5 Cables/Miscellaneous
- 6 3 Master Caddy II
- 7 Lector docking station USB-C 3.1
- 8 Battery Eliminator
- 9 Power kit Atomos

TECHNICAL FEATURES


Dimension:
 Internal dimension
 305,7x232,4x137,5(mm) - 12.04x9.15x5.41(in)
 External dimension
 334,6x303x155,2(mm) - 13.17x11.93x6.11(in)

Weight:
 empty: 1,75kg - 3.86lbs
 with cubed foam: 1,90kg - 4.19lbs

Temperature rating:
 Minimum Maximum
 -40°C -40°F +80°C +176°F



TECHNICAL DRAWING

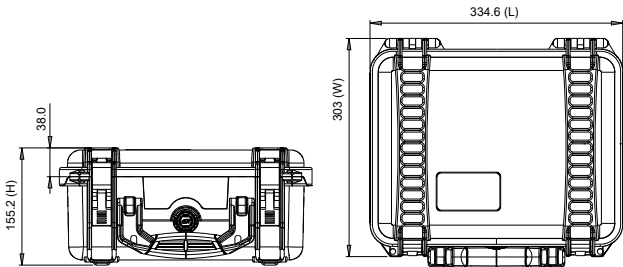





井 READY

HPRC2400 Atomos Shogun 7 + Accessory Kit SHG7-2400-01



- 1 Atomos Shogun 7
- 2 USB 3.0 docking station
- 3 International Adapter
- 4 Cable
- 5 Fast charger
- 6 NP-F750 5200mAh Batteries
- 7 HDR Sunhood
- 8 Master Caddy II drive caddies
- 9 AC Power Adapter
- 10 Miscellaneous Accessories



TECHNICAL FEATURES


Dimension:
 Internal dimension
 377x263,9x150,8(mm) - 14.84x10.39x5.94(in)
 External dimension
 402X330,5X169,2(mm) - 15.83x13.01x6.66(in)

Weight:
 empty: 2,23kg - 4.91lbs
 with cubed foam: 2,46kg - 5.42lbs

Temperature rating:
 Minimum
 -40°C -40°F
 Maximum
 +80°C +176°F



TECHNICAL DRAWING

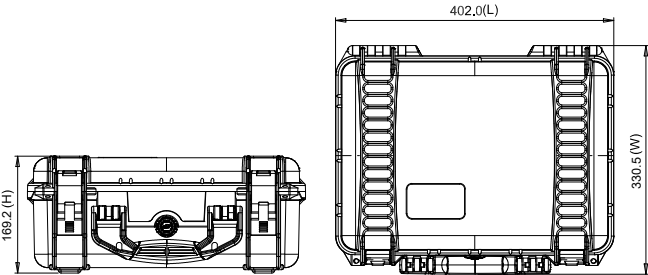



HPRC2730W for Atomos Sumo19 SM19-2730W-01



- 1

Atomos Sumo 19" Monitor Recorder
- 2

Atomos Sunhood
- 3

Charger
- 4

3 Master caddy II
- 5

DM-130A Gold Mount Mini Battery or similar
- 6

D-4BA Battery Extender or similar


TECHNICAL FEATURES

Dimension:
 internal dimension
 503x459x316(mm) - 19.80x18.07x12.44(in)
 external dimension
 616,9x531x349,6(mm) - 24.29x20.91x13.76(in)

Weight:
 empty: 8,41kg - 18.54lbs
 with cubed foam: 10,43kg - 22.99lbs

Temperature rating:
 Minimum Maximum
 -40°C -40°F +80°C +176°F

TECHNICAL DRAWING

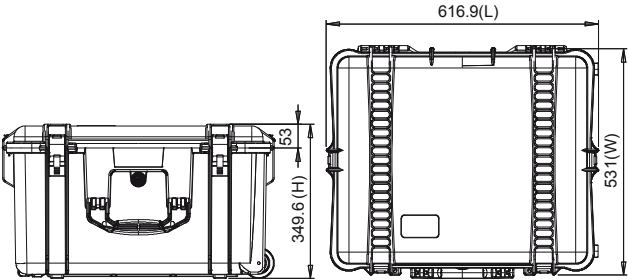



HPRC 2730W

SUM019



MATTEBOX

SPECIAL CASES 2021

HPRC2600 for Tilta MB-T12 Mattebox T12MB-2600-01



- 1 Carbon fiber body with 15mm LWS attached
- 2 Top French flag
- 3 Step-down rings
- 4 Hard Mattes (16-20mm, 24-28mm, 32-35mm, 50-85mm, 85-180mm)
- 5 Miscellaneous
- 6 Miscellaneous



HPRC TILTA MB-T12 MATTEBOX

TECHNICAL FEATURES


Dimension:
 internal dimension
 482,4x358,3x198,1(mm) - 18.99x14.1x7.8(in)
 external dimension
 543,4x426,8x218,1(mm) - 21.39x16.8x8.59(in)

Weight:
 empty: 4,31kg - 9.50lbs
 with cubed foam: 5,03kg - 11.09lbs

Temperature rating:
 Minimum Maximum
 -40°C -40°F +80°C +176°F



TECHNICAL DRAWING

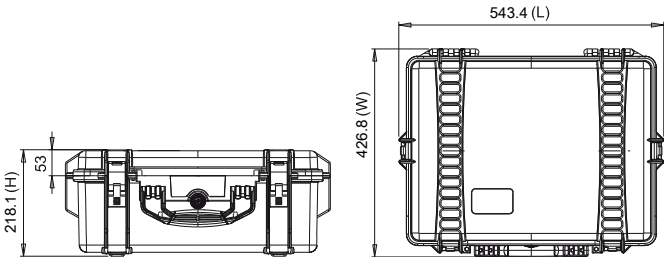



MOZA

SPECIAL CASES 2021

HPRC2530 for Moza Air2 Ifocus MAIR2-2530-01



- 1 Gimbal
- 2 Quick Release Plate
- 3 Cable storage bag
- 4 Intelligent Charger and 18650 batteries
- 5 IFocus M
- 6 IFocus Handunit
- 7 Ifocus Motor
- 8 Tripod
- 9 Follow focus install pipe




TECHNICAL FEATURES

Dimension:
 internal dimension 513x288x132(mm) - 20.20x11.34x5.20(in)
 external dimension 540x350x153(mm) - 21.26x13.78x6.02(in)

Weight:
 empty: 3,20kg - 7.05lbs
 with cubed foam: 3,26kg - 7.19lbs

Temperature rating:
 Minimum Maximum
 -40°C -40°F +80°C +176°F

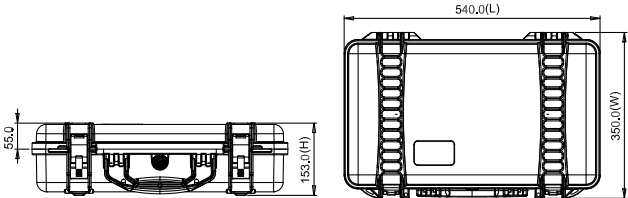



ZHIYUN CRANE

SPECIAL CASES 2021

HPRC2600W for ZHIYUN Crane 3 Lab CR3-2600W-01



- 1 Crane 3 Lab Stabilizer
- 2 TransMount Handheld Tripod
- 3 Battery Charger
- 4 Batteries 18650
- 5 Cable Storage Case
- 6 Quick Release Plate
- 7 TransMount Phone Holder



HPRC ZHIYUN CRANE 3 LAB

TECHNICAL FEATURES


Dimension:
 Internal dimension
 482,4x358,3x217,6(mm) - 18.99x14.1x8.57(in)
 External dimension
 546,9x426,8x250,7(mm) - 21.53x16.8x9.87(in)

Weight:
 empty: 6,05kg - 13.34lbs
 with cubed foam: 6,97kg - 15.37lbs

Temperature rating:
 Minimum Maximum
 -40°C -40°F +80°C +176°F



TECHNICAL DRAWING

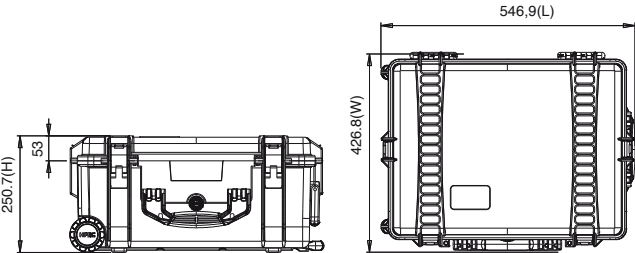

HPRC2700W for ZHIYUN Crane 3 Lab Master package

CR3-2700W-01



- 1 Crane 3 Lab Stabilizer
- 2 Handheld Tripod
- 3 Battery Charger
- 4 Cable Storage Case
- 5 Quick Setup Kits
- 6 Telescopic Monopod with Locking Buckle and Multifunctional Camera Belt
- 7 Phone Holder with Crown Gear
- 8 Miscellaneous
- 9 Batteries 18650
- 10 Focus and Zoom Combo Kits
- 11 Cable
- 12 Quick Release Base Plate
- 13 Quick Release Plate
- 14 HPRC1100 (not included)



TECHNICAL FEATURES


Dimension:
Internal dimension
554,7x458,7x246(mm) - 21.84x18.06x9.69(in)
External dimension
617,5x527,3x279,6(mm) - 24.31x20.76x11.0(in)

Weight:
empty: 7,74kg - 17.06lbs
with cubed foam: 8,84kg - 19.49lbs

Temperature rating:
Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

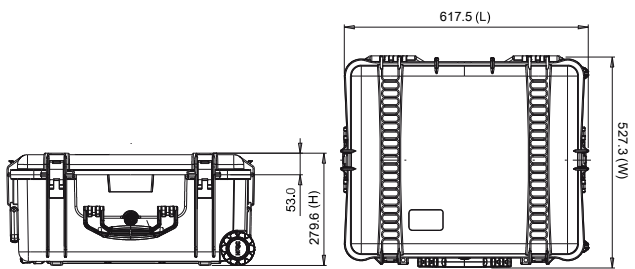



HPRC 2700W

Powered by DJI

CRANE 3



YUNEEC

SPECIAL CASES 2021

HPRC4600W for Yuneec Typhoon H TYH-4600W-01



- 1 Yuneec Typhoon H
- 2 Spare Battery
- 3 Remote Controller
- 4 2 Kits of Spare Props
- 5 Transformer
- 6 Charger
- 7 Miscellaneous Accessories
- 8 Small Accessories / Cables
- 9 Small Tools
- 10 Sunshade



HPRC YUNEEC TYPHOON H

TECHNICAL FEATURES


Dimension:
 internal dimension
 611x611x375(mm) - 24.05x24.05x14.76(in)
 external dimension
 670X677X418,5(mm) - 26.38x26.65x16.48(in)

Weight:
 empty: 10,70kg - 23.54lbs
 with foam: 12,5kg - 27.55lbs

Temperature rating:
 Minimum Maximum
 -40°C -40°F +80°C +176°F



TECHNICAL DRAWING

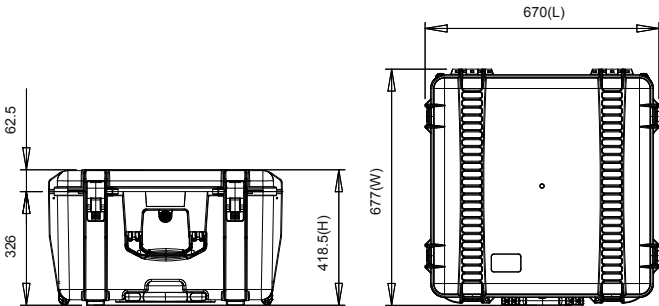



CHASING-INNOVATION

SPECIAL CASES 2021

HPRC2710 for Chasing Innovation Gladius Mini Rev. 2 GLA2710-02



TECHNICAL FEATURES

Dimension:

Internal dimension
 555x459x256(mm) - 21.85x18.07x10.08(in)
 External dimension
 617x525x280(mm) - 24.29x20.67x11.02(in)

Weight:


empty: 6,71kg - 14.76lbs

Temperature rating:

Minimum Maximum
 -40°C -40°F +80°C +176°F



TECHNICAL DRAWING

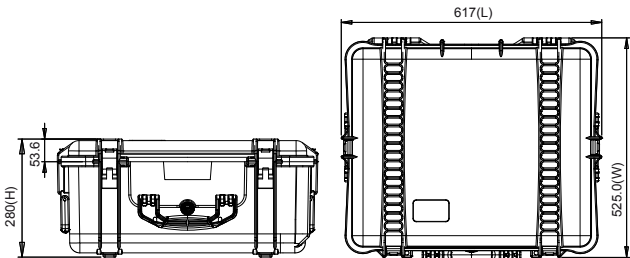

HPRC GLADIUS MINI

HPRC2710 for Chasing M2 Rov M2R-2710-01



- 1 Drone
- 2 O-rings
- 3 Winder & Tether
- 4 Power Cord & 3 in 1 Charger
- 5 Towel
- 6 Remote Controller
- 7 Battery



TECHNICAL FEATURES


Dimension:
 Internal dimension
 555x459x256(mm) - 21.85x18.07x10.08(in)
 External dimension
 617x525x280(mm) - 24.29x20.67x11.02(in)

Weight:
 empty: 6,71kg - 14.76lbs

Temperature rating:
 Minimum Maximum
 -40°C -40°F +80°C +176°F



TECHNICAL DRAWING

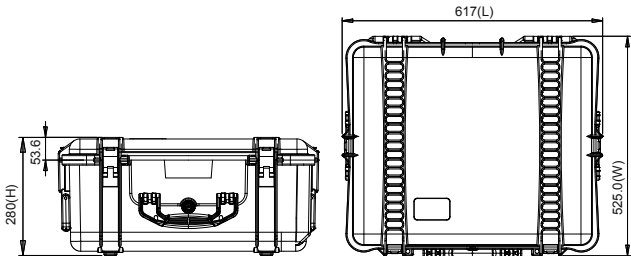





QYSEA

SPECIAL CASES 2021



HPRC2760W for Qysea Fifiish V6S

FIV6S-2760W-01



- 1 Charger/Miscellaneous
- 2 FIFISH V6s Underwater Robot
- 3 100/200M Tether With Reel
- 4 Remote Controller
- 5 VR headtracking box
- 6 100N Clamping force



TECHNICAL FEATURES

Dimension:

Internal dimension
690x450x301(mm) - 27.16x17.72x11.85(in)
External dimension
750x511x329(mm) - 29.53x20.12x12.95(in)

Weight:


empty: 9,03kg - 19.91lbs
with cubed foam: 10,14kg - 22.35lbs

Temperature rating:

Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

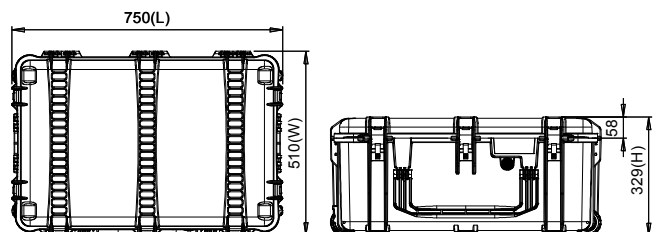



BLACKMAGIC

SPECIAL CASES 2021

HPRC2400 for Blackmagic Pocket Cinema Camera 6K Pro

PKT6P-2400-01

NEW



- 1 Blackmagic Pocket Cinema Camera 6K Pro with or without professional cage
- 2 Lenses: Diameter Max 90mm × Length Max 220mm
- 3 International Adapters
- 4 LP-E6 Battery
- 5 30W power supply
- 6 HPRC1100MEM

HPRC BLACKMAGIC POCKET CINEMA CAMERA 6K PRO

TECHNICAL FEATURES


Dimension:
Internal dimension
377x263,9x150,8(mm) - 14.84x10.39x5.94(in)
External dimension
402x330,5x169,2(mm) - 15.83x13.01x6.66(in)

Weight:
empty: 2,23kg - 4.91lbs
with cubed foam: 2,55kg - 5.62lbs

Temperature rating:
Minimum
-40°C -40°F
Maximum
+80°C +176°F



TECHNICAL DRAWING

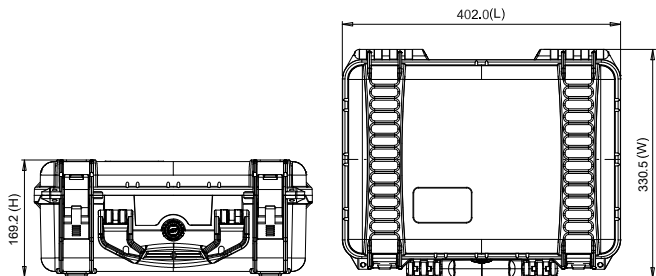

HPRC2400 COMBO

for Blackmagic Pocket Cinema Camera 6K or 4K

PKTC-2400-01

NEW



- 1 Cinema Blackmagic Pocket 4K or 6K with or without professional cage and Metabones mounted
- 2 Lenses: Diameter Max 90mm x Length Max 220mm
- 3 International Adapters
- 4 LP-E6 Battery
- 5 30W power supply
- 6 HPRC1100MEM

TECHNICAL FEATURES

Dimension:

Internal dimension
377x263,9x150,8(mm) - 14.84x10.39x5.94(in)
External dimension
402x330,5x169,2(mm) - 15.83x13.01x6.66(in)

Weight:


empty: 2,23kg - 4.91lbs
with cubed foam: 2,55kg - 5.62lbs

Temperature rating:

Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

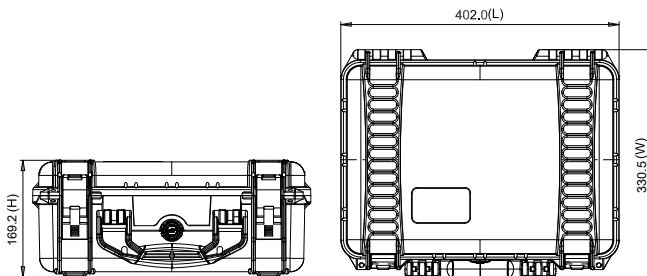

HPRC2300 for ATEM Mini, ATEM Mini Pro and ATEM Mini Pro ISO

AMI-2300-01

NEW



- 1 ATEM Mini/Mini Pro/Mini Pro ISO
- 2 Charger
- 3 Angelbird SSD2GO
- 4 Blackmagic ATEM Streaming Bridge
- 5 HDMI cables/Miscellaneous



TECHNICAL FEATURES

Dimension:

Internal dimension
305,7x232,4x137,5(mm) - 12.04x9.15x5.41(in)
External dimension
334,6x303x155,2(mm) - 13.17x11.93x6.11(in)

Weight:


empty: 1,75kg - 3.86lbs
with cubed foam: 1,90kg - 4.19lbs

Temperature rating:

Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

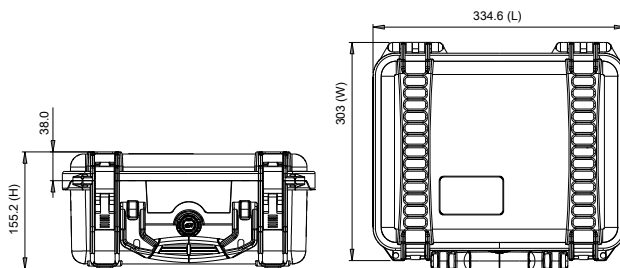

HPRC ATEM Mini, ATEM Mini Pro and ATEM Mini Pro ISO

HPRC2500 for ATEM Mini Extreme and Atem Mini Extreme ISO

AME-2500-01

NEW



- 1 ATEM Mini Extreme/Mini Extreme ISO
- 2 Miscellaneous
- 3 Charger
- 4 Blackmagic ATEM Streaming Bridge
- 5 Angelbird SSD2GO
- 6 HDMI cables/Miscellaneous



TECHNICAL FEATURES

Dimension:

internal dimension
449,8x322,9x174,9(mm) - 17.71x12.71x6.89(in)
external dimension
478,1x389,4x194(mm) - 18.82x15.33x7.64(in)

Weight:

empty: 3,08kg - 6.79lbs
with cubed foam: 3,71kg - 8.18lbs


Temperature rating:

Minimum Maximum
-40°C -40°F +80°C +176°F



CABIN OK

TECHNICAL DRAWING

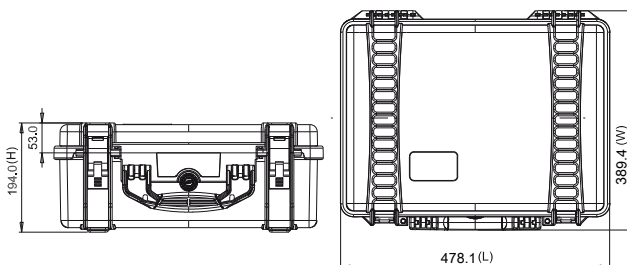

HPRC2710 for Blackmagic Atem 1 M/E ADV1-2710-01



Blackmagicdesign
 




1 Blackmagic Design Atem 1 M/E Advanced Panel

TECHNICAL FEATURES

Dimension: internal dimension 555x459x256(mm) - 21.85x18.07x10.08(in) external dimension 617x525x280(mm) - 24.29x20.67x11.02(in)	
Weight: empty: 6,43 kg - 14.18 lbs with foam: 7,45 kg - 16.42 lbs	
Temperature rating: Minimum Maximum -40°C -40°F +80°C +176°F	

TECHNICAL DRAWING

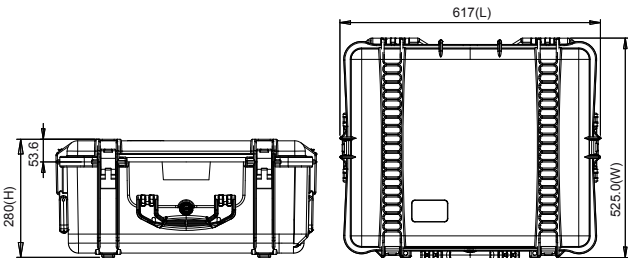

HPRC2730W for Blackmagic Ursa Mini Pro/Broadcast

URS2730W-03



Blackmagicdesign  **FOR URSA MINI PRO
and URSA BROADCAST**

HPRC BLACKMAGIC URSA MINI PRO



- 1** BlackMagic Ursa Mini Pro / Broadcast with shoulder pad and top handle mounted
- 2** Tripod Plate
- 3** Shoulder Mount kit - Rods clamps
- 4** Batteries
- 5** Lens
- 6** Accessories / Cables
- 7** HPRC1100 Memory card holder for CFast/SDHC cards
- 8** Charger standard and Charger SWIT S-3802S



TECHNICAL FEATURES

Dimension:

internal dimension
503x459x316(mm) - 19.80x18.07x12.44(in)
external dimension
616,9x531x349,6(mm) - 24.29x20.91x13.76(in)

Weight:


empty: 8,41kg - 18.54lbs
with cubed foam: 10,43kg - 22.99lbs

Temperature rating:

Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

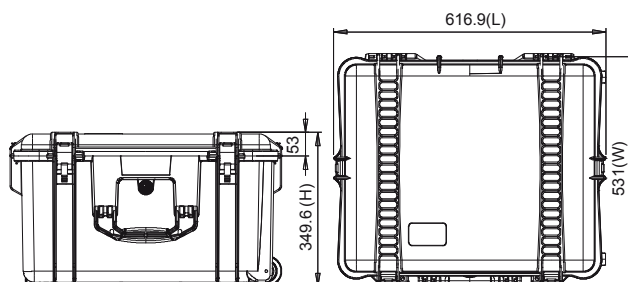





SONY

α

7R

Carl Zeiss

Vario-Tessar FE 4/24-70 ZM OSS

35588032

SONY

SPECIAL CASES 2021

HPRC2460 for Sony Alpha 7 ALP2460-01



HPRC2460 for ALPHA 7 is a special edition, designed to safely carry your SONY Alpha Series.



- 1 Sony A7/A7R/A7S/A7II/A7RII/A7SII/a6300/ Alpha 1 with or without professional cage and lenses mounted (EF/F/PL-Mount/Leica R)
- 2 Lenses: Sony FE 50/1.4, 50/2,8 Macro, 24-70/2.8 G, 85/1,4 G, 16-35/4, 24-70/4, 28-70/3.5-5.6, 28/2.0 - SONY ZA 35/2.8, 35/1.4, 50/1.4, 50/1,8 55/1.8/ 10-18/4 - Zeiss Loxia 21/2.8, 35/2.0, 50/2.0
- 3 Battery chargers, cables
- 4 Accessories (baseplate, rods, top grip handles, lockports, cables, batteries, controllers, GoPro)
- 5 external recorder Atomos/Sound Device etc




TECHNICAL FEATURES

Dimension:
 internal dimension
 409x306x175(mm) - 16.1x12.05x6.89(in)
 external dimension
 435x377,8x193(mm) - 17.13x14.87x7.60(in)

Weight:
 empty: 2,57kg - 5.65lbs
 with cubed foam: 2,97kg - 6.55lbs

Temperature rating:
 Minimum Maximum
 -40°C -40°F +80°C +176°F

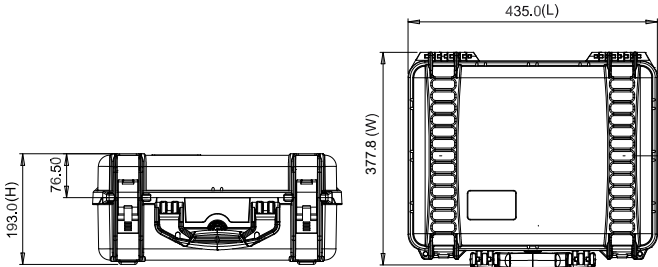

HPRC2400 for Sony FX3 FX3-2400-01

NEW



- 1 Sony FX3
- 2 Lenses: Diameter Max 90mm × Length Max 220mm
- 3 XLR Handle Unit
- 4 Battery Charger BC-QZ1
- 5 Battery NP-FZ100
- 6 Cable

TECHNICAL FEATURES


Dimension:
 Internal dimension
 377x263,9x150,8(mm) - 14.84x10.39x5.94(in)
 External dimension
 402x330,5x169,2(mm) - 15.83x13.01x6.66(in)

Weight:
 empty: 2,49kg - 5.48lbs
 with cubed foam: 3,20kg - 7.04lbs

Temperature rating:
 Minimum Maximum
 -40°C -40°F +80°C +176°F



TECHNICAL DRAWING

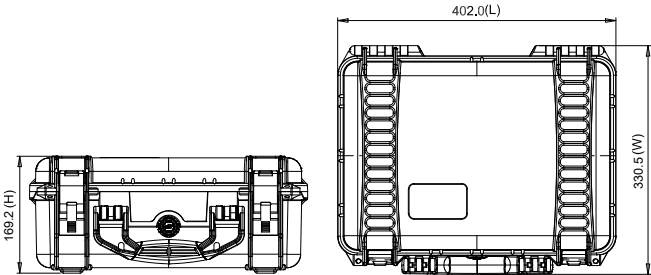

HPRC SONY FX3

HPRC2550W for Sony ILME-FX6

FX6-2550W-01

NEW



- 1 Sony ILME-FX6 Cinema Line + Smart Handle
- 2 BP-U35 or BP-U100 Battery
- 3 Charger
- 4 Cables
- 5 LCD Monitor 3,5"
- 6 2x Lenses GM or x Tele GM
- 7 Smart Grip



HPRC SONY ILME-FX6

TECHNICAL FEATURES

Dimension:

internal dimension
513x288x200(mm) - 20.19x11.34x7.87(in)
external dimension
549x346x236(mm) - 21.61x13.62x9.29(in)

Weight:


empty: 4,35kg - 9.57lbs
with foam: 5,04kg - 11.10 lbs

Temperature rating:

Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

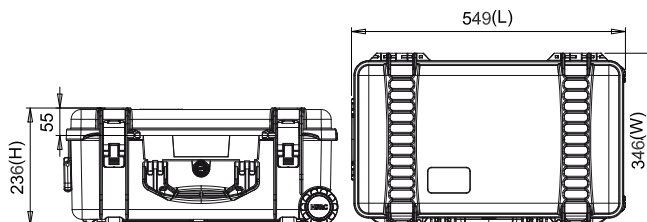

HPRC2700W for Sony PXW-FX9 FX9-2700W-01



SONY
 PXW-FX9



- 1 Sony Camcorder
- 2 Viewfinder LCD
- 3 External Microphone
- 4 Battery Sony BP-U Series
- 5 Lens Adapter Metabones
- 6 Sony XQD/SD Card
- 7 Canon CNE Prime Lens
- 8 Cine Lenses up to 105mm Ø
- 9 Photo Lenses up to 105mm Ø
- 10 Hand Grip
- 11 Cable
- 12 Charger
- 13 HPRC1100 MEMBLB

TECHNICAL FEATURES


Dimension:
 Internal dimension
 554,7x458,7x246(mm) - 21.84x18.06x9.69(in)
 External dimension
 617,5x527,3x279,6(mm) - 24.31x20.76x11.0(in)

Weight:
 empty: 7,75kg - 17.09lbs
 with cubed foam: 9,07kg - 19.99lbs

Temperature rating:
 Minimum Maximum
 -40°C -40°F +80°C +176°F



TECHNICAL DRAWING

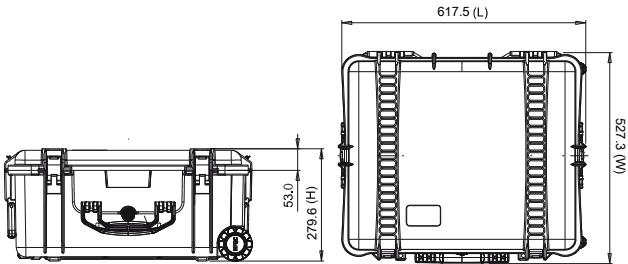

HPRC2730W for Sony Venice

VEN2730W-01



- 1 Sony Venice With Axs-R7 Mounted
- 2 Axs Memory And Sxs Memory Axs-Ar1
- 3 Lanparte Universal Grip Ug-02
- 4 Accessories/Air Evf Mount
- 5 Miscellaneous
- 6 Power Supply V-Lock Pc2l
- 7 Battery V-Lock B100usb/B230usb
- 8 Viewfinder Dvf-EI200
- 9 Hprc1300 Sxs
- 10 Shoulder Mount Accessory Vct-Fsa5
- 11 Tripod Place
- 12 Shoulder Mount Rods



TECHNICAL FEATURES

Dimension:

internal dimension
503x459x316(mm) - 19.80x18.07x12.44(in)
external dimension
616,9x531x349,6(mm) - 24.29x20.91x13.76(in)

Weight:


empty: 8,39kg - 18.49lbs
with cubed foam: 10,19kg - 22.47lbs

Temperature rating:

Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

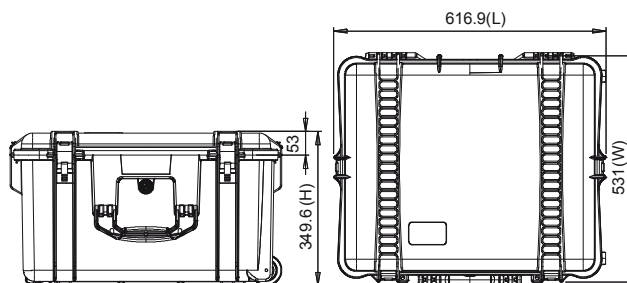

HPRC2600W for Sony PXW-Z280

Z280-2600W-01



- 1 Sony Camcorder PXW-Z280
- 2 Cables/Accessories/Miscellaneous
- 3 Battery Sony BPU – U60
- 4 Compact 4K Wide Conversion
- 5 Microphone



TECHNICAL FEATURES


Dimension:
 Internal dimension
 482,4x358,3x217,6(mm) - 18.99x14.1x8.57(in)
 External dimension
 546,9x426,8x250,7(mm) - 21.53x16.8x9.87(in)

Weight:
 empty: 6,05kg - 13.34lbs
 with cubed foam: 6,97kg - 15.37lbs

Temperature rating:
 Minimum
 -40°C -40°F
 Maximum
 +80°C +176°F



TECHNICAL DRAWING

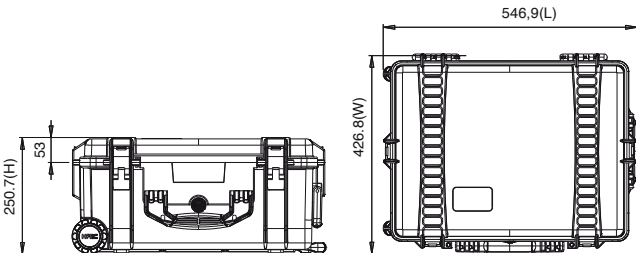

HPRC2700W for Sony PXW-Z190V Z190-2700W-01



SONY
PXWZ190V



- 1** Sony Camcorder PXW-Z190VC
- 2** BC-U1 battery charger
- 3** Battery Sony BPU \Swit S-8U63
- 4** Microphone
- 5** Wireless Audio Set Sony UWP-D11/K51PRO
- 6** Cables/Accessories/Miscellaneous

HPRC SONY PXWZ190V

TECHNICAL FEATURES

Dimension:

Internal dimension
554,7x458,7x246(mm) - 21.84x18.06x9.69(in)
External dimension
617,5x527,3x279,6(mm) - 24.31x20.76x11.0(in)

Weight:


empty: 7,75kg - 17.09lbs
with cubed foam: 9,07kg - 19.99lbs

Temperature rating:

Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

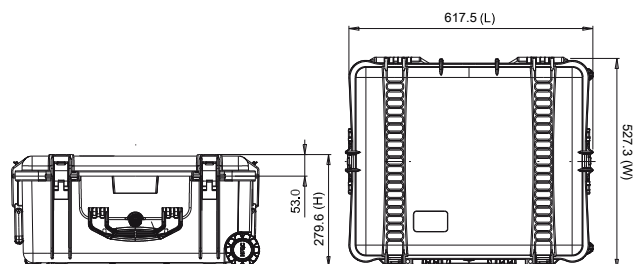

HPRC2730W for Sony PXW-ZFS7 FS7-2730W-01



- 1 Sony PXW-ZFS7
- 2 Viewfinder
- 3 Sony PXW-FS7 FS7 Grip
- 4 HPRC1300 MEMBLB
- 5 VCT-FS7 Lightweight Rod Support System
- 6 19mm Quick Release
- 7 Miscellaneous
- 8 Rods 9/15/19 mm
- 9 Genlock XDCAFS7
- 10 Charger
- 11 Battery
- 12 Monitor
- 13 Lens 100mm
- 14 Lens 24/70mm
- 15 Box for Metabones PL – E mount T
- 16 Box for Metabones Canon EF Lens to Sony E - mount T



TECHNICAL FEATURES


Dimension:
 internal dimension
 503x459x316(mm) - 19.80x18.07x12.44(in)
 external dimension
 616,9x531x349,6(mm) - 24.29x20.91x13.76(in)

Weight:
 empty: 8,41kg - 18.54lbs
 with cubed foam: 10,43kg - 22.99lbs

Temperature rating:
 Minimum Maximum
 -40°C -40°F +80°C +176°F



TECHNICAL DRAWING

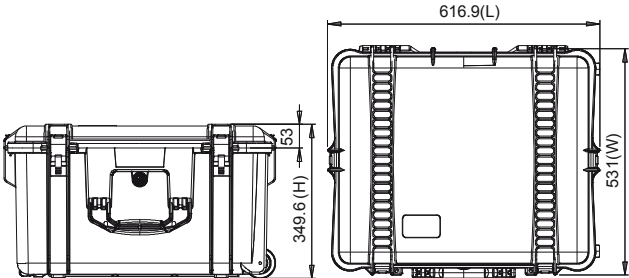





Z CAM

SPECIAL CASES 2021

HPRC2400 for Z CAM E2-F6 Full Frame 6K Cinema Camera ZE2F6-2400-01



- 1 Z CAM E2-F6 Full Frame 6K Cinema Camera with SmallRig Cage mounted
- 2 Alternative Lens Mount
- 3 Accessories
- 4 Charger
- 5 Cable
- 6 NF-P Battery
- 7 CFast 2.0
- 8 WiFi Antenna



TECHNICAL FEATURES


Dimension:
 Internal dimension
 377x263,9x150,8(mm) - 14.84x10.39x5.94(in)
 External dimension
 402X330,5X169,2(mm) - 15.83x13.01x6.66(in)

Weight:
 empty: 2,23kg - 4.91lbs
 with cubed foam: 2,49kg - 5.49lbs

Temperature rating:
 Minimum Maximum
 -40°C -40°F +80°C +176°F



TECHNICAL DRAWING

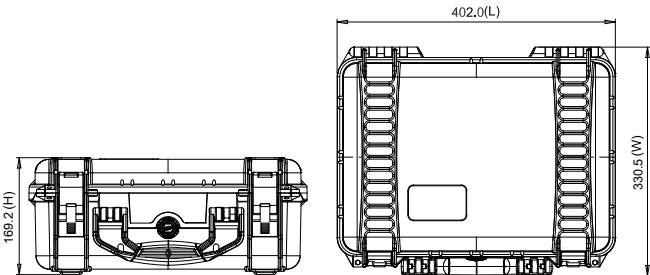

HPRC Z CAM E2-F6



G O P R O

SPECIAL CASES 2021

HPRC1400 for GoPro Hero 7

GPR7-1400-01



- 1 GoPro Hero7 with Camera Frame
- 2 Battery
- 3 SD Card Rack
- 4 Cable
- 5 J-Hook Buckle



HPRC GOPRO HERO7

TECHNICAL FEATURES


Dimension:
internal dimension
180x110x40(mm) - 7.08x4.33x1.57(in)
external dimension
200,3x142,4x48(mm) - 7.89x5.61x1.89(in)

Weight:
empty: 0,26kg - 0.57lbs

Temperature rating:
Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

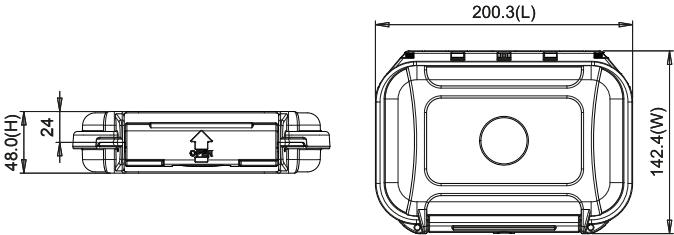



FUJIFILM

SPECIAL CASES 2021

HPRC2500 for Fujifilm GFX100 GFX100-2500-01




- 1 Fujifilm GFX100
- 2 Cable storage/Miscellaneous
- 3 Adjustable lens: FUJIFILM GF 110mm f/2 R LM WR Lens, 23mm f/4 R LM WR Lens, 45mm f/2.8 R WR Lens, 32-64mm f/4 R LM WR Lens
- 4 Battery charger
- 5 Battery NP-T125
- 6 Ac Power Adapter

TECHNICAL FEATURES

Dimension:
 internal dimension
 449,8x322,9x174,9(mm) - 17.71x12.71x6.89(in)
 external dimension
 478,1x389,4x194(mm) - 18.82x15.33x7.64(in)

Weight:
 empty: 3,22kg - 7.10lbs
 with cubed foam: 3,75kg - 8.27lbs

Temperature rating:
 Minimum Maximum
 -40°C -40°F +80°C +176°F

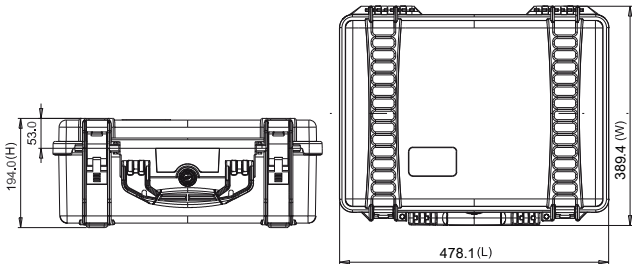




RED

SPECIAL CASES 2021

HPRC2730W for Red Ranger Gemini RGE-2730W-01

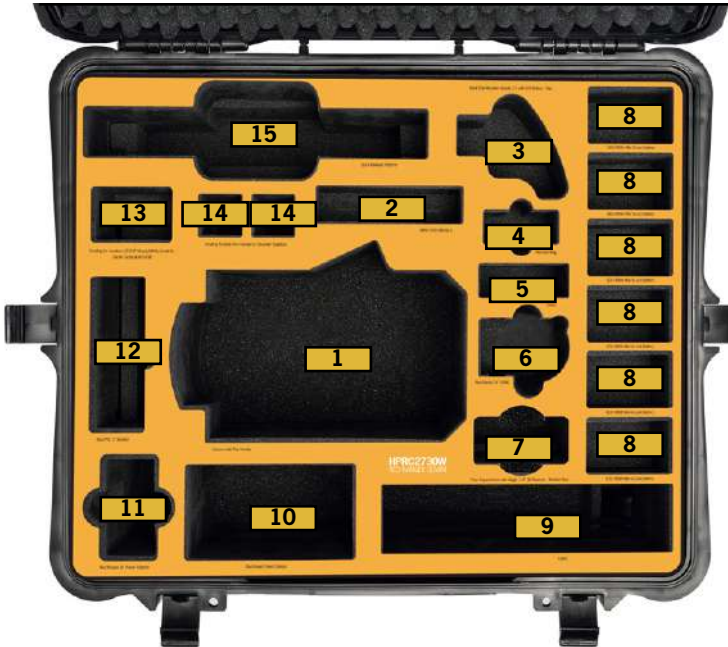

- 1 Camera with Top Handle
- 2 HPRC1300 MEVBLB
- 3 Right Side Wooden Handle 2.0 with R/S Button - Tilt
- 4 Red Mini Mag
- 5 Cable
- 6 Red Bomb EVF DSMC
- 7 Titan Support Arm with Single 1/4" QR Bracket – Monitor Side
- 8 GDU 98Wh Mini V-Lock Battery
- 9 Cable
- 10 BlueShape Travel Charger
- 11 Red Ranger Ac Power Adaptor
- 12 DSMC2 Red Touch 7.0" LCD
- 13 Smallrig for monitor LCD EVF Mount/BMVA/SmallHD, Zacuto Gratical HD1938
- 14 Smallrig Rosette Arm Handle for Shoulder Stabilizer
- 15 Quick Release Platform



HPRC RED RANGER GEMINI

TECHNICAL FEATURES


Dimension:
 internal dimension
 503x459x316(mm) - 19.80x18.07x12.44(in)
 external dimension
 616,9x531x349,6(mm) - 24.29x20.91x13.76(in)

Weight:
 empty: 8,41kg - 18.54lbs
 with cubed foam: 10,43kg - 22.99lbs

Temperature rating:
 Minimum Maximum
 -40°C -40°F +80°C +176°F



TECHNICAL DRAWING

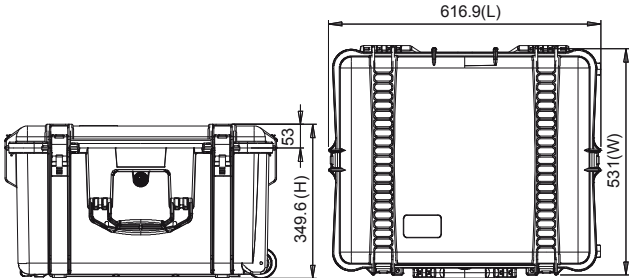



NIKON

SPECIAL CASES 2021

HPRC2460 for Nikon D850

D850-2460-01



for **NIKON D850**



- 1 D850 Camera Body
- 2 Additional EN-EL15a Rechargeable Li-ion Battery
- 3 ME-W1 Wireless Microphone
- 4 ME-1 Stereo Microphone
- 5 Atomos Ninja Flame
- 6 Lenses: AF-S NIKKOR 35mm f/1,8G ED / AF-S NIKKOR 85mm f/1.8G / AF-S NIKKOR 20mm f/1,8G ED
- 7 MH-25A Battery Charger/ UC-E22 USB Cable / Coiled HDMI Cable


HPRC NIKON D850

TECHNICAL FEATURES

Dimension:
internal dimension
409x306x175(mm) - 16.1x12.05x6.89(in)
external dimension
435x377,8x193(mm) - 17.13x14.87x7.60(in)

Weight:
empty: 2,55kg - 5.62lbs
with cubed foam: 3,14kg - 6.92lbs

Temperature rating:
Minimum Maximum
-40°C -40°F +80°C +176°F

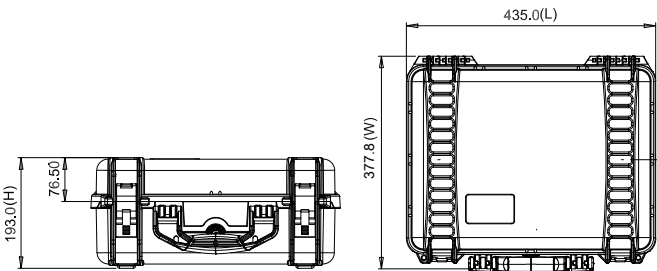



PANASONIC

SPECIAL CASES 2021

HPRC2460 for Panasonic GH5

GH52460-01



FOR PANASONIC GH5

HPRC2460 for PANASONIC GH5 is a special edition, designed to safely carry your GH5 Lumix G Series.



- 1 PANASONIC GH5 with or without professional cage and lenses mounted
- 2 Lenses: lumix g 8mm f3,5 (fisheye) hd, lumix dg summilux 12 f1.4, lumix g pancake 14mm f2.5, leica dg summilux 15mm / f1,7 asph, lumix g 20mm f1,7 (asph), leica dg summilux 25mm f1,4 (asph), lumix g 25mm f1.7 asph., lumix g 30mm macro f2,8, leica dg nocticron 42,5 mm f 1,2 (asph) hd, lumix g dg 1,7 / 42,5mm asph/power o.i.s., leica dg macro-elmarit 45mm f2,8 (asph), lumix g vario 7-14mm f4,0 (asph) hd, leica dg vario elmarit 8-18, lumix g vario 12-32mm f3.5-f5.6 (asph) hd, lumix g x vario 12-35mm f2,8 (asph) hd, lumix g x vario 12-35 ii, leica dg vario elmarit 12-60, lumix g vario 12-60, lumix g vario 14-42mm f3,5-5,6 (asph) hd, lumix g vario 14-42mm f3,5-5,6 (asph) hd, lumix g x vario pz 14-42mm f3,5-5,6 (asph), lumix g vario 14-42mm f3,5-5,6 (asph) hd, lumix g x vario pz 14-42mm f3,5-5,6 (asph), lumix g vario 14-45mm f3,5-5,6 (asph) hd, lumix g x vario 35-100mm f2,8 hd, lumix g x vario 35-100 ii, lumix g vario 35-100mm f4,0-5,6, lumix g vario 45-200 ii, lumix g 12,5mm f12,5 3d
- 3 Battery chargers, cables
- 4 Accessories (baseplate, rods, top grip handles, lockports, cables, batteries, controllers, GoPro)
- 5 External recorder Atomos/Sound Device etc

HPRC PANASONIC GH5

TECHNICAL FEATURES

Dimension:


internal dimension
409x306x175(mm) - 16.1x12.05x6.89(in)
external dimension
435x377,8x193(mm) - 17.13x14.87x7.60(in)

Weight:

empty: 2,55kg - 5.62lbs
with cubed foam: 3,14kg - 6.92lbs

Temperature rating:

Minimum Maximum
-40°C -40°F +80°C +176°F

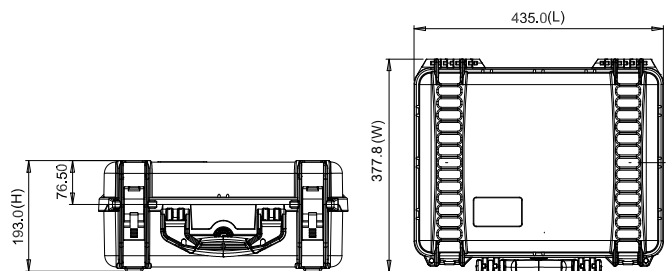



CANON

SPECIAL CASES 2021

HPRC2300 for Canon Eos R5 / R6

CR5-2300-01

NEW



HPRC
VECTOR PANEL
INSIDE



- 1 Canon EOS R5 / R6 Mirrorless Digital Camera (with or without professional cage)
- 2 Lenses: Diameter Max 90mm x Length Max 220mm
- 3 Cable/Miscellaneous
- 4 LC-E6 Charger for LP-E6 Battery Pack
- 5 LP-E6NH Lithium-Ion Battery (7.2V, 2130mAh)



TECHNICAL FEATURES


Dimension:
Internal dimension
305,7x232,4x137,5(mm) - 12.04x9.15x5.41(in)
External dimension
334,6x303x155,2(mm) - 13.17x11.93x6.11(in)

Weight:
empty: 1,75kg - 3.86lbs
with cubed foam: 1,90kg - 4.19lbs

Temperature rating:
Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

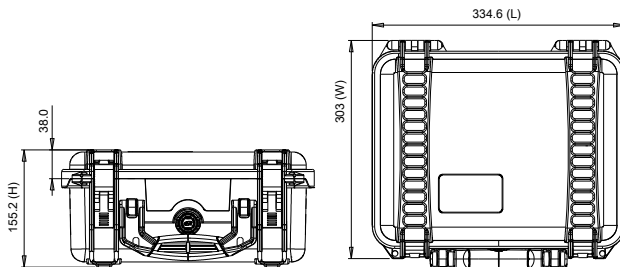

HPRC CANON EOS R5 / R6

HPRC2700W for CANON EOS C300 MARK III

C300-2700W-01

NEW



- 1 EOS C300 Mark III Body
- 2 Lens CN-E18-80
- 3 Lens 110/90 mm diameter, depth 180mm
- 4 Monitor
- 5 Handle
- 6 Charger
- 7 Various/Cable
- 8 Battery BP-A30/BP-A60
- 9 Charger
- 10 HPRC1100MEM



HPRC CANON EOS C300 MARK III

TECHNICAL FEATURES


Dimension:
Internal dimension
554,7x458,7x246(mm) - 21.84x18.06x9.69(in)
External dimension
617,5x527,3x279,6(mm) - 24.31x20.76x11.0(in)

Weight:
empty: 7,75kg - 17.09lbs

Temperature rating:
Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

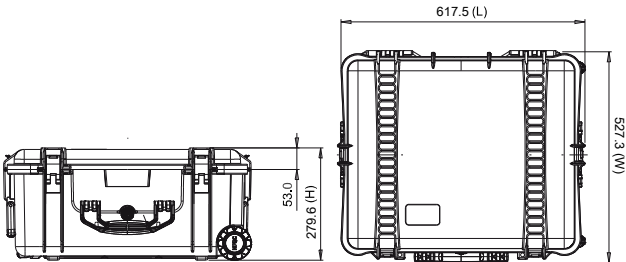



 READY

HPRC2600 for Canon Eos C70

C70-2600-01

NEW



- 1 Canon Eos C70
- 2 Batteries BP-A60/BP-A30
- 3 Lens Canon RF 24-105 or similar
- 4 Lens Canon RF 15-35 or similar
- 5 Lens Canon RF 70-200 or similar
- 6 Lens Canon RF 24-70 or similar
- 7 Canon Adapter EF-RF 0.71x
- 8 HPRC1300MEMBLB
- 9 CA-CP200L
- 10 Miscellaneous
- 11 Battery Charger CG-A20 OTH
- 12 Handle unit



TECHNICAL FEATURES


Dimension:
internal dimension
482,4x358,3x198,1(mm) - 18.99x14.1x7.8(in)
external dimension
543,4x426,8x218,1(mm) - 21.39x16.8x8.59(in)

Weight:
empty: 4,25kg - 9.37lbs
with cubed foam: 5,05kg - 11.13lbs

Temperature rating:
Minimum -40°C -40°F
Maximum +80°C +176°F



TECHNICAL DRAWING

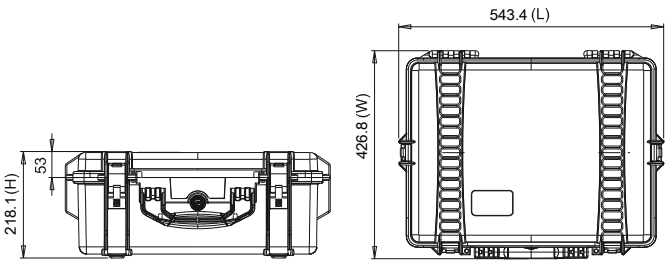

HPRC2600 for Canon Eos C200

C200-2600-01



- 1 Canon Eos C200 With Camera Grip Mounted
- 2 Handle Unit Hdu-2
- 3 Monitor Lcd Lm-V1, Lcd La-V1
- 4 Compact Power Adaptor Ca-A10
- 5 Compact Adaptor Cp200b
- 6 Lenses Ef85mm/16-35/24-70/24-105Mm
- 7 HPRC1100MEM
- 8 Battery Pack A30/A60
- 9 Battery Charger A-20
- 10 Miscellaneous Accessories
- 11 Screw
- 12 Allen Key

HPRC CANON EOS C200

TECHNICAL FEATURES

Dimension:

internal dimension
482,4x358,3x198,1(mm) - 18.99x14.1x7.8(in)
external dimension
543,4x426,8x218,1(mm) - 21.39x16.8x8.59(in)

Weight:


empty: 4,31kg - 9.50lbs
with cubed foam: 4,84kg - 10.663lbs

Temperature rating:

Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

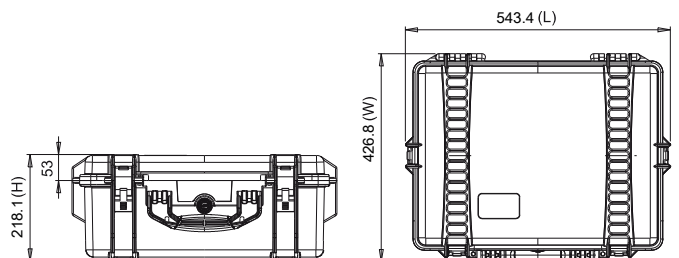

HPRC2600 for Canon Eos C100

C100-2600-01



- 1 Canon Eos C100 With Viewfinder and Camera Grip Mounted
- 2 Handle Unit
- 3 Lenses Ef85mm/16-35/24-70/24-105Mm
- 4 Battery Pack Bp 955
- 5 Battery Pack Bp 975
- 6 Battery Charger Cg-940
- 7 Compact Adaptor Ca-941
- 8 Miscellaneous Accessories
- 9 HPRC1100MEM

TECHNICAL FEATURES

Dimension:

internal dimension
482,4x358,3x198,1(mm) - 18.99x14.1x7.8(in)
external dimension
543,4x426,8x218,1(mm) - 21.39x16.8x8.59(in)

Weight:


empty: 4,25kg - 9.37lbs
with cubed foam: 5,05kg - 11.13lbs

Temperature rating:

Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

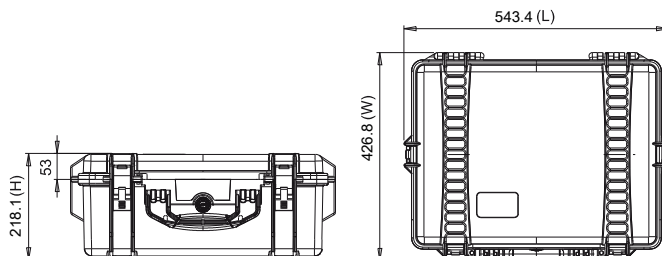





LEICA

Leica

LEICA

SPECIAL CASES 2021

SUMMILUX-M 1:1.4/35 ASPH.

HPRC2400 for Leica M LEM2400-01



FOR LEICA M




- 1 1 x Leica M Camera Body with Lens Attached
- 2 Electronic Viewfinder
- 3 4 x Lens
- 4 Charger
- 5 Spare Battery
- 6 Cables/Miscellaneous

TECHNICAL FEATURES

Dimension:
 Internal dimension
 377x263,9x150,8(mm) - 14,84x10,39x5,94(in)
 External dimension
 402X330,5X169,2(mm) - 15.83x13.01x6.66(in)

Weight:
 empty: 2,38kg - 5.25lbs

Temperature rating:
 Minimum Maximum
 -40°C -40°F +80°C +176°F

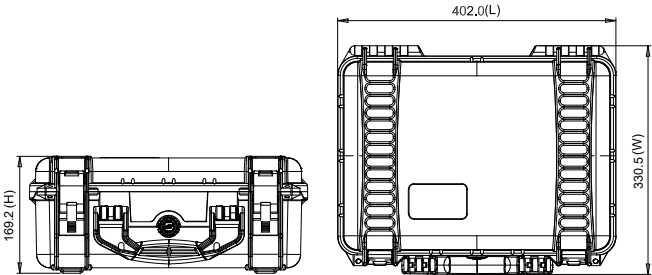

HPRC2460 for Leica M LEM2460-01



FOR LEICA M



- 1 2 x Leica M Camera Body with Lens Attached
- 2 2 x Electronic Viewfinder
- 3 2 x Spare Batteries
- 4 4 x Lens
- 5 2 x Charger
- 6 Cables/Miscellaneous

TECHNICAL FEATURES


Dimension:
 internal dimension
 409x306x175(mm) - 16.1x12.05x6.89(in)
 external dimension
 435x377,8x193(mm) - 17.13x14.87x7.60(in)

Weight:
 empty: 2,55kg - 5.62lbs
 with cubed foam: 3,14kg - 6.92lbs

Temperature rating:
 Minimum Maximum
 -40°C -40°F +80°C +176°F



21.5

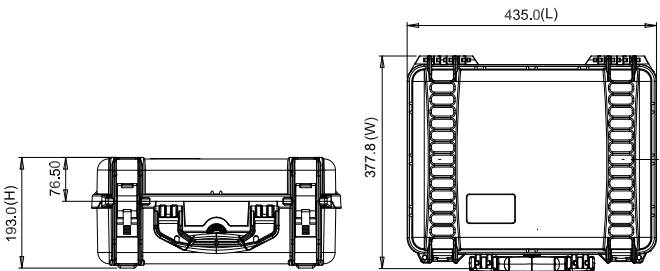



11
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100





I



BROMPTON

BROMPTON

SPECIAL CASES 2021

HPRC4800W for Brompton BRO4800W-01



- 1 Brompton Bike
- 2 Accessories

TECHNICAL FEATURES


Dimension:
 internal dimension
 720x320x600(mm) - 28.34x12.60x23.62(in)
 external dimension
 776x380x649(mm) - 30.55x14.96x25.55(in)

Weight:
 empty: 10,00kg - 22.21lbs
 with cubed foam: 14,10kg - 31.08lbs

Temperature rating:
 Minimum Maximum
 -40°C -40°F +80°C +176°F



TECHNICAL DRAWING

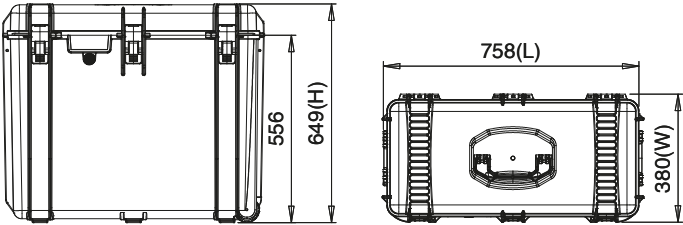

HPRC BROMPTON



APPLE



SPECIAL CASES 2021

HPRC4800W for Apple Mac Pro

MPRO-4800W-01

NEW



HPRC
VECTOR PANEL
INSIDE



- 1 Mac Pro
- 2 Miscellaneous
- 3 Power cord
- 4 USB-C to Lightning Cable
- 5 Magic Mouse 2
- 6 Magic Keyboard

HPRC APPLE MAC PRO 2020

TECHNICAL FEATURES


Dimension:
internal dimension
720x320x600(mm) - 28.34x12.60x23.62(in)
external dimension
776x380x649(mm) - 30.55x14.96x25.55(in)

Weight:
empty: 10.00kg - 22.21lbs
with cubed foam: 14.10kg - 31.08lbs

Temperature rating:
Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

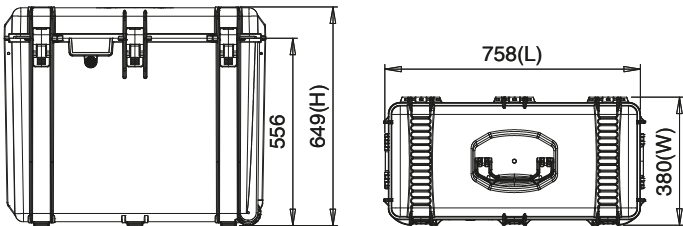



HPRC4800W for Apple Imac 27"- ImacPro

MAC4800W-01



- 1 Apple Imac 27" - ImacPro
- 2 Cable
- 3 Keyboard + Mouse



TECHNICAL FEATURES

Dimension:

internal dimension
720x320x600(mm) - 28.34x12.60x23.62(in)
external dimension
776x380x649(mm) - 30.55x14.96x25.55(in)

Weight:



empty: 10,00kg - 22.21lbs
with cubed foam: 14,10kg - 31.08lbs

Temperature rating:

Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING



HPRC2350 for MacPro13" + accessories

MPRO-2350-01



- 1 MacBook Pro 13"
- 2 Miscellaneous

HPRC APPLE MACPRO 13"

TECHNICAL FEATURES


Dimension:
internal dimension
340x235x99(mm) - 13.39x9.25x3.90(in)
external dimension
365x293x115,5(mm) - 14.37x11.54x4.55(in)

Weight:
empty: 1.49kg - 3.29lbs
with cubed foam: 1.66kg - 3.65lbs

Temperature rating:
Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

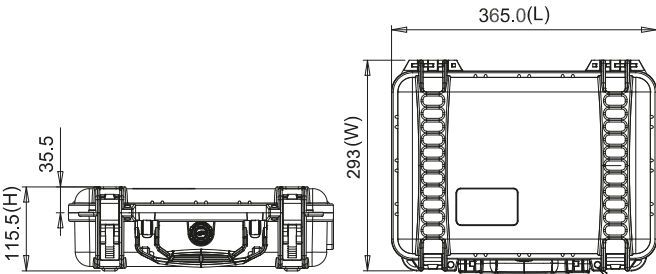

HPRC2400 for MacPro15" + accessories

MPRO-2400-01



- 1** MacBook Pro 15"
- 2** Miscellaneous

TECHNICAL FEATURES

Dimension:

Internal dimension
377x263,9x150,8(mm) - 14.84x10.39x5.94(in)
External dimension
402x330,5x169,2(mm) - 15.83x13.01x6.66(in)

Weight:


empty: 2,38kg - 5.25lbs

Temperature rating:

Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

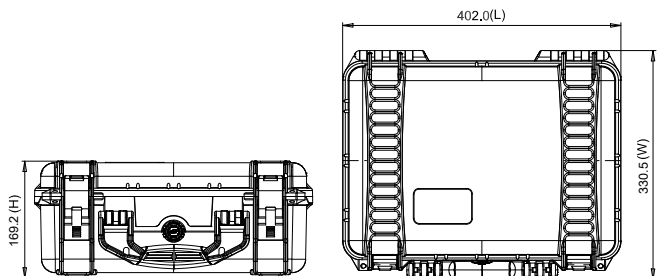



EIZO

SPECIAL CASES 2021

HPRC4800W for EIZO 27/24"

EIZ27-4800W-01

NEW



- 1 Eizo Monitor 27" or 24"
- 2 Cables and accessories
- 3 Cables and accessories
- 4 Protective hood and accessories



HPRC EIZO 27/24"

TECHNICAL FEATURES


Dimension:
internal dimension
720x320x600(mm) - 28.34x12.60x23.62(in)
external dimension
776x380x649(mm) - 30.55x14.96x25.55(in)

Weight:
empty: 11,12kg - 24.50lbs
with cubed foam: 12,43kg - 27.40lbs

Temperature rating:
Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

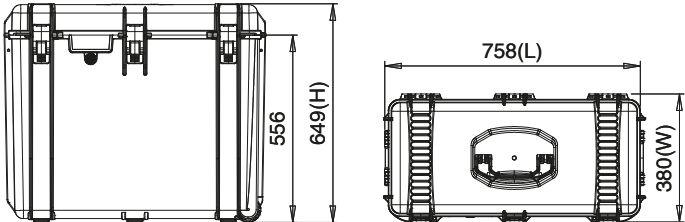



UNIVERSAL MICROPHONES

SPECIAL CASES 2021

HPRC2200 for Universal Microphones

MCF3-2200-01



1 Universal Microphone

TECHNICAL FEATURES

Dimension:

internal dimension
236x182x108(mm) - 9.29x7.17x4.25(in)
external dimension
258x244,3x123,3(mm) - 10.16x9.62x4.85(in)

Weight:


empty: 0,87kg - 1.92lbs
with cubed foam: 1,08kg - 2.38lbs

Temperature rating:

Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

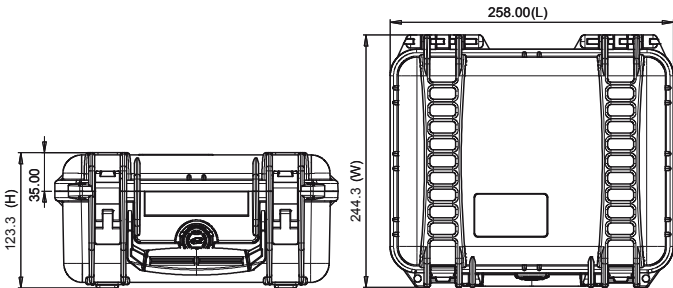

HPRC2250 for Universal Microphones

MCF6-2250-01



LEVEL 1



LEVEL 2



LEVEL 1



LEVEL 2

1 Universal Microphone

TECHNICAL FEATURES

Dimension:

internal dimension
236x182x155(mm) - 9.29x7.17x6.10(in)
external dimension
258X230X170(mm) - 10.16x9.06x6.69(in)

Weight:


empty: 1,00kg - 2.20lbs
with cubed foam: 1,35kg - 2.97lbs

Temperature rating:

Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

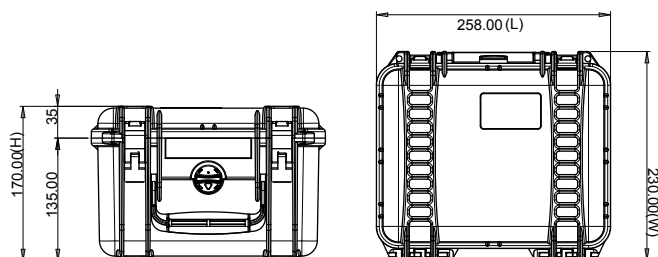



Index

code	description	page
	DJI	4
PHA4-2710-02	HPRC2710 FOR DJI PHANTOM 4	5
PHA4-2700W-02	HPRC2700W FOR DJI PHANTOM 4	6
PHA4-BAG27-01	SOFT BAG FOR DJI PHANTOM 4	7
PHA4RTK-2700W-01	HPRC2700W FOR DJI PHANTOM 4RTK / MULTISPECTRAL	8
PHA4RTKGS-2780W-01	HPRC2780W FOR DJI PHANTOM4 RTK + GROUND STATION / MULTISPECTRAL	9
DRTK6500W-01	HPRC6500W FOR DJI D-RTK2	10
M300-2800W-01	HPRC2800W FOR DJI MATRICE 300 RTK	12
M600-2800W-01	HPRC2800W PER DJI MATRICE 600 // MATRICE 600 PRO	13
BAT2550W-03	HPRC2550W BATTERY CASE FOR DJI MATRICE 300 RTK	15
M210-4600W-04	HPRC4600W FOR DJI MATRICE 200 OR 210 - 2 X CENDENCE CONTROLLERS/ CRYSTALSKY	16
BAT2550W-02	HPRC2550W BATTERY CASE FOR DJI MATRICE 200 OR 210 - V. 2.0	17
INS2-2780W-02	HPRC2780W FOR DJI INSPIRE 2	18
INS2-4600W-02	HPRC4600W FOR DJI INSPIRE 2	19
BAT2550W-01	HPRC2550 FOR DJI INSPIRE 2	20
SCE-2300-01	HPRC2300 FOR DJI SMART CONTROLLER ENTERPRISE	21
CEN2460-02	HPRC2460 FOR DJI CENDENCE + CRISTAL SKY - REV. 2	22
MAV2-2400BLK-02	HPRC2400 BLACK CASES FOR DJI MAVIC 2 PRO/ZOOM + DJI SMART CONTROLLER	23
MAV2-3500BLK-02	HPRC3500 BLACK FOR DJI MAVIC 2 PRO/ZOOM + SMART CONTROLLER	24
MAVBAG35-03	HPRC SOFT BACKPACK FOR MAVIC 2 PRO/ZOOM + SMART CONTROLLER	25
MAV2A-2400-02	HPRC2400 FOR DJI AIR 2S AND MAVIC AIR 2 REV.02	26
MAV2A-2300-01	HPRC2300 FOR DJI AIR 2S AND MAVIC AIR 2 FLY MORE COMBO	27
MAV2A-3500-01	HPRC3500 FOR DJI AIR 2S AND MAVIC AIR 2 FLY MORE COMBO	28
MAVBAG35-04	HPRC SOFT BACKPACK FOR DJI AIR 2S AND MAVIC AIR 2 FLY MORE COMBO	29
MAVM-2300-02	HPRC2300 FOR DJI MINI 2 COMBO FLY MORE	30
FPV-2500-01	HPRC2500 FOR DJI FPV COMBO	32
FPV-3600-01	HPRC3600 FOR DJI FPV COMBO	33
OSMPKT-1400-02	HPRC 1400 FOR DJI POCKET 2 CREATIVE COMBO KIT	35
OSMPKT-1400-01	HPRC1400 FOR DJI OSMO POCKET	36
OSMACT-1400-01	HPRC1400 FOR DJI OSMO ACTION	37
GGG-2460-01	HPRC 2460 FOR DJI GOGGLES	38
RSC2-2500-01	HPRC2500 FOR DJI RSC2 PRO COMBO	39
RS2-2500-01	HPRC2500 FOR DJI RS 2 PRO COMBO	40
RS2-3500-01	HPRC3500 FOR DJI RS 2 PRO COMBO	41
RS2-BAG35-01	SOFT BAG FOR DJI RS 2 PRO COMBO	42
ROB-2730W-01	HPRC2730W FOR DJI ROBOMASTER S1	45
	AUTEL ROBOTICS	46
EVO2-2400-02	HPRC2400 FOR AUTEL EVO II 6K / 8K DRONE - REV. 02	47
	ATOMOS	48
NJAV-2300-01	HPRC2300 FOR ATOMOS NINJA V	49

code	description	page
SHG7-2400-01	HPRC2400 FOR ATOMOS SHOGUN 7" + ACCESSORY KIT	52
SM19-2730W-01	HPRC2730W FOR ATOMOS SUMO 19"	54
	MATTEBOX	56
T12MB-2600-01	HPRC2600 FOR TILTA MB-T12 MATTEBOX	57
	MOZA	58
MAIR2-2530-01	HPRC2530 FOR MOZA AIR2 IFOCUS	59
	ZHIYUN CRANE	60
CR3-2600W-01	HPRC2600W FOR ZHIYUN CRANE 3 LAB	61
CR3-2700W-01	HPRC2700W FOR ZHIYUN CRANE 3 LAB MASTER PACKAGE	62
	YUNEEC	64
TYH-4600W-01	HPRC4600W FOR TYPHOON H	65
	CHASING-INNOVATION	66
GLA2710-02	HPRC2710 FOR CHASING INNOVATION GLADIUS MINI REV.02	67
M2R-2710-01	HPRC2710 FOR CHASING M2 ROV	68
	QYSEA	70
FIV6S-2760W-01	HPRC2760W FOR QYSEA FIFISH V6S	71
	BLACKMAGIC	72
PKT6P-2400-01	HPRC2400 FOR BLACKMAGIC POCKET CINEMA CAMERA 6K PRO	73
PKTC-2400-01	HPRC2400 COMBO FOR BLACKMAGIC POCKET CINEMA CAMERA 6K OR 4K + METABONES	74
AMI-2300-01	HPRC2300 FOR ATEM MINI, ATEM MINI PRO AND ATEM MINI PRO ISO	75
AME-2500-01	HPRC2500 FOR ATEM MINI EXTREME AND ATEM MINI EXTREME ISO	76
ADV1-2710-01	HPRC2710 FOR BLACKMAGIC DESIGN ATEM 1 M/E ADVANCED PANEL	77
URS2730W-03	HPRC2730W FOR BLACKMAGIC URSA MINI PRO - URSA BROADCAST	78
	SONY	80
ALP2460-01	HPRC2460 SPECIAL EDITION FOR SONY ALPHA	81
FX3-2400-01	HPRC2400 FOR SONY FX3 CINEMA LINE	82
FX6-2550W-01	HPRC2550W PER SONY ILME-FX6 CINEMA LINE	83
FX9-2700W-01	HPRC2700W FOR SONY PXW-FX9 - CINEMA LINE	84
VEN2730W-01	HPRC2730W FOR SONY VENICE - CINEMA LINE	85
Z280-2600W-01	HPRC2600W FOR SONY PXW-Z280	86
Z190-2700W-01	HPRC2700W FOR SONY PXWZ190V	87
FS7-2730W-01	HPRC2730W FOR SONY FS7	88
	Z CAM	90
ZE2F6-2400-01	HPRC2400 FOR ZCAM E2-F6 FULL FRAME 6K CINEMA CAMERA	91
	GO PRO	92
GPR7-1400-01	HPRC 1400 FOR GO PRO HERO 7 / 8	93
	FUJIFILM	94
GFX100-2500-01	HPRC2500 FOR FUJIFILM GFX100	95
	RED	96
RGE-2730W-01	HPRC2730W FOR RED RANGER GEMINI	97

Index

code	description	page
	NIKON	98
D850-2460-01	HPRC2460 FOR NIKON D850 FILMMAKER'S KIT	99
	PANASONIC	100
GH52460-01	HPRC2460 SPECIAL EDITION FOR PANASONIC GH5 AND ACCESSORIES	101
	CANON	102
CR5-2300-01	HPRC2300 FOR CANON EOS R5 / R6	103
C300-2700W-01	HPRC2700W FOR CANON EOS C300 MARK III	104
C70-2600-01	HPRC2600 FOR CANON EOS C70	106
C200-2600-01	HPRC2600 FOR CANON EOS C200	107
C100-2600-01	HPRC2600 FOR CANON EOS C100	108
	LEICA	110
LEM2400-01	HPRC2400 FOR LEICA M	111
LEM2460-01	HPRC2460 FOR LEICA M	112
	BROMPTON	114
BRO4800W-01	HPRC4800W FOR BROMPTON FOLDING BIKE	115
	APPLE	116
MPRO-4800W-01	HPRC4800W FOR APPLE MACPRO 2020	117
MAC4800W-01	HPRC4800W FOR APPLE IMAC 27" - IMAC PRO27"	119
MPRO-2350-01	HPRC2350 FOR APPLE MACBOOK PRO 13" + ACCESSORIES	120
MPRO-2400-01	HPRC2400 FOR APPLE MACBOOK PRO 15" + ACCESSORIES	121
	EIZO	122
EIZ27-4800W-01	HPRC4800W PER MONITOR EIZO 27"E MONITOR EIZO 24"	123
	UNIVERSAL MICROPHONES	124
MCF3-2200-01	HPRC2200 FOR 3 UNIVERSAL MICROPHONES	125
MCF6-2250-01	HPRC2250 FOR 6 UNIVERSAL MICROPHONES	126





Plaber s.r.l. - HPRC cases

Via Div Tridentina, 10
I-36061 Bassano del Grappa
Vicenza - Italy

Tel +39 0424 809150
Fax +39 0424 808548

USA office and warehouse:

Plaber America Inc - HPRC cases

110 Chestnut Ridge Rd. #314
Montvale, NJ 07645

Tel +1 201 617 2010
Fax +1 201 617 2001

www.hprc.it | www.hprcusa.com

info@hprc.it

HPRC® Brand owned by:

plaber

SPECIAL CASES 2021