

plaber®



READY MADE SOLUTIONS – 2022

We are HPRC. We don't just design and manufacture watertight hard protective cases, we supply carrying solutions. And solutions need to be no-hassle and tailored to your needs.

This is why in Autumn 2013 we designed our first case with a foam specially cut to house the DJI Phantom 1.

Now, almost 9 years later, we are a leading manufacturer of custom cases for drones, gimbals, camcorders and cameras but we feel we are still at the beginning: more is yet to come.



HPRC VECTOR PANEL

The new protective layer system designed for your Ready Case



Made of special PVC based compound, the Vector Panel ensures:

- foam long-last durability and integrity;
- improved protection for the equipment;
- dedicated item slots, suitably marked, avoiding lost tools;
- easy and quick organization of the case;
- savings in space and time;
- professional design and presentation.



The system significantly increases the overall performance and efficiency of the case in any kind of environment, weather conditions and temperature.



DJI

READY MADE SOLUTIONS – 2022

HPRC2400 for DJI Mavic 3 Cine / DJI Mavic 3 MAV3-2400-01



- 1 DJI Mavic 3 Cine / DJI Mavic 3
- 2 Battery Charging Hub / Cables
- 3 DJI RC Pro / DJI RC-N1 / DJI Smart Controllers
- 4 Propellers / Portable Charger
- 5 Miscellaneous
- 6 ND Filters Set 2X
- 7 Intelligent Flight Battery



TECHNICAL FEATURES


Dimension:
 Internal dimension
 377x263,9x150,8(mm) - 14.84x10.39x5.94(in)
 External dimension
 402X330,5X169,2(mm) - 15.83x13.01x6.66(in)

Weight:
 empty: 2,23kg - 4.92lbs
 with cubed foam: 2,58kg - 5.69lbs

Temperature rating:
 Minimum Maximum
 -40°C -40°F +80°C +176°F



TECHNICAL DRAWING

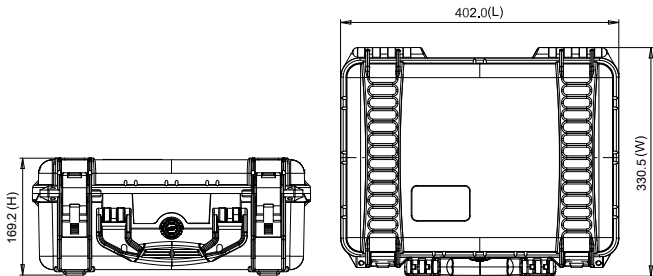

HPRC DJI MAVIC 3 /CINE

HPRC3500 for DJI Mavic 3 Cine / DJI Mavic 3 MAV3-3500-01




- 1 DJI Mavic 3 Cine / DJI Mavic 3
- 2 Battery Charging Hub / Cables
- 3 DJI RC Pro / DJI RC-N1 / DJI Smart Controllers
- 4 Propellers
- 5 Miscellaneous
- 6 ND Filters Set 2X
- 7 Intelligent Flight Battery



TECHNICAL FEATURES


Dimension: Internal dimension 433,5x319,3x168,8(mm) - 17.07x12.57x6.65(in) External dimension 497,9x370,3x184,9(mm) - 19.6x14.58x7.28(in)	 
Weight: empty: 3,00kg - 6.61lbs with cubed foam: 3,55kg - 7.82lbs	
Temperature rating: Minimum -40°C -40°F Maximum +80°C +176°F	

TECHNICAL DRAWING

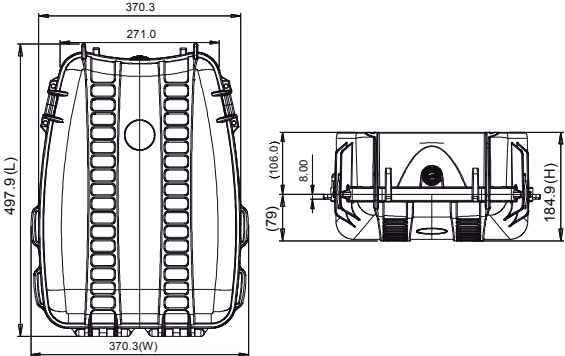

Bag for DJI Mavic 3 Cine / DJI Mavic 3

MAVBAG35-05

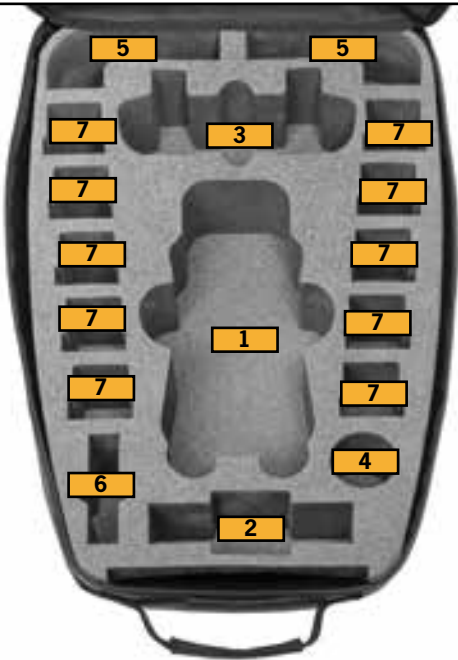

- 1 DJI Mavic 3 Cine / DJI Mavic 3
- 2 Battery Charging Hub / Cables
- 3 DJI RC Pro / DJI RC-N1 / DJI Smart Controllers
- 4 Propellers
- 5 Miscellaneous
- 6 ND Filters Set 2X
- 7 Intelligent Flight Battery



HPRC DJI MAVIC 3 / CINE

TECHNICAL FEATURES

Dimension:
internal dimension
433x319x169(mm) - 17.05x12.56x6.65(in)
external dimension
498x370x185(mm) - 19.61x14.57x7.28(in)



HPRC2700W for DJI Phantom 4RTK PHA4RTK-2700W-01



- 1 Dji Phantom 4 RTK / Multispectral
- 2 Intelligent Flight Battery
- 3 Remote Controller
- 4 Ipad Air/Tablet Up to 10"
- 5 Hprc1100 For 8 Microsd Cards
- 6 Charging Hub for WB37
- 7 Battery WB37
- 8 Charging Hub for Int.flight Battery
- 9 AC Power Adapter / Miscellaneous Accessories
- 10 Propellers



suitable for v 2.0 low noise propellers

TECHNICAL FEATURES


Dimension:
 Internal dimension
 554,7x458,7x246(mm) - 21.84x18.06x9.69(in)
 External dimension
 617,5x527,3x279,6(mm) - 24.31x20.76x11.0(in)

Weight:
 empty: 7,75kg - 17.09lbs
 with cubed foam: 9,07kg - 19.99lbs


Temperature rating:
 Minimum Maximum
 -40°C -40°F +80°C +176°F



TECHNICAL DRAWING

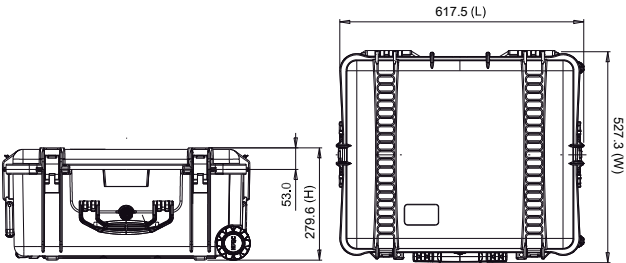

HPRC2780W for DJI Phantom 4 RTK + Ground Station PHA4RTKGS-2780W-01

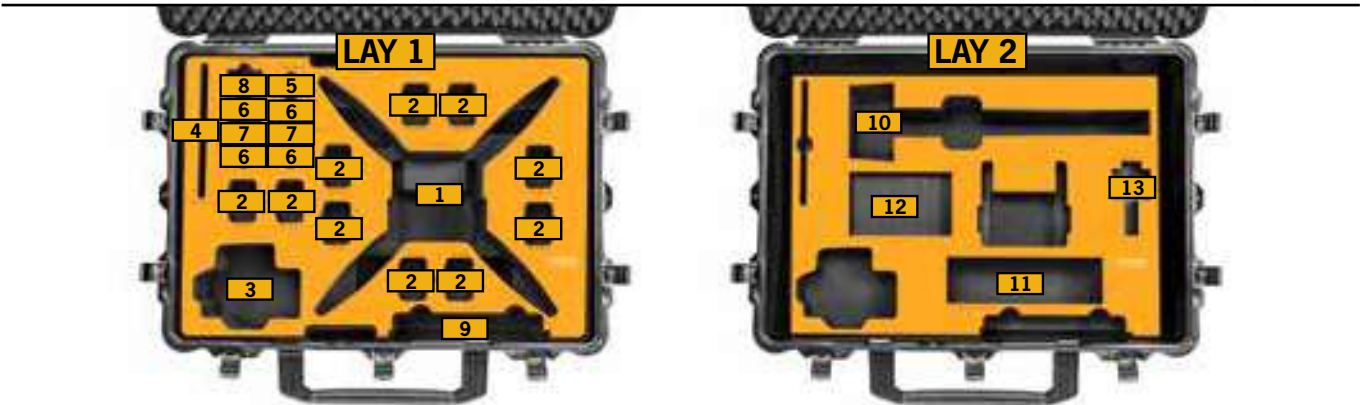

- 1** Dji Phantom 4 RTK / Phantom 4 Multispectral
- 2** Intelligent Flight Battery
- 3** Remote Controller
- 4** Ipad Air/Tablet up to 10"
- 5** Hprc 1100 for 8 MicroSD Card
- 6** Battery WB37
- 7** Charging Hub for WB37
- 8** Miscellaneous Accessories
- 9** Propellers

- 10** DRTK 2 Body
- 11** Charging Hub for Int.flight Battery/AC Power Adapter
- 12** Miscellaneous Accessories
- 13** Mobile Phone Holder



TECHNICAL FEATURES

Dimension:

Internal dimension
748,6x524,6x363,3(mm) - 29.47x20.65x14.3(in)
External dimension
814x586,5x387,7(mm) - 32.05x23.09x15.27(in)

Weight:


empty: 12,0 kg - 26.46 lbs
with foam: 14,49 kg – 31.94 lbs

Temperature rating:

Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

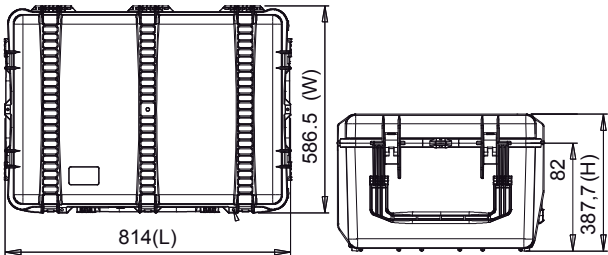

HPRC6500W for DJI D-RTK 2

DRTK6500W-01




- 1** D-RTK 2 Body
- 2** Accessories Box (Mobile Phone Holder; Charging Hub, Intelligent Battery, Battery Cover, Ac Power Adapter\Cable etc)
- 3** Extention Rod
- 4** Tripod

TECHNICAL FEATURES


Dimension:
Internal dimension
1280,7x279x242,8(mm) - 50.42x10.98x9.56(in)
External dimension
1328x335x299,8(mm) - 52.28x13.19x11.8(in)

Weight:
empty: 7,2kg - 15.88lbs
with cubed foam: 9,03kg - 19.90lbs

Temperature rating:
Minimum Maximum
-40°C -40°F +80°C +176°F




TECHNICAL DRAWING

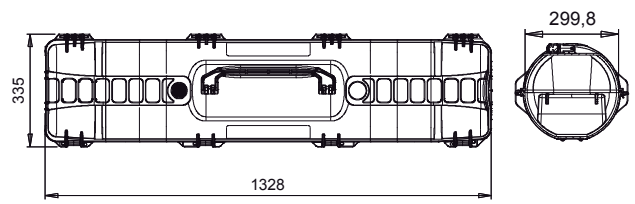


HPRC2800W for DJI Matrice 300 RTK

M300-2800W-02

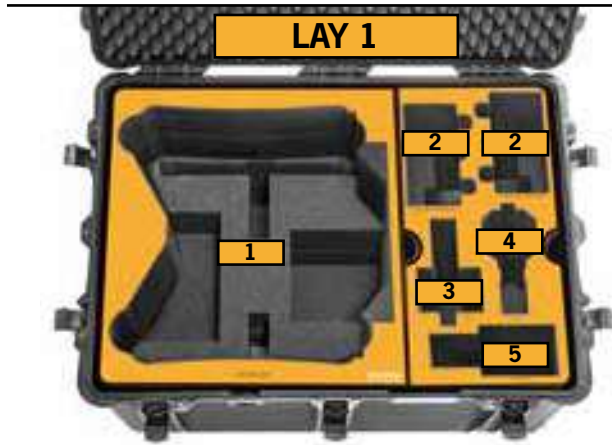

- 1** DJI Matrice 300 RTK in Landing Mode (2 Gimbal and 2 Batteries mounted)
- 2** DJI Smart Controller Enterprise (Battery Attached)
- 3** Zenmuse L1
- 4** Zenmuse P1
- 5** H20/H20T Gimbal

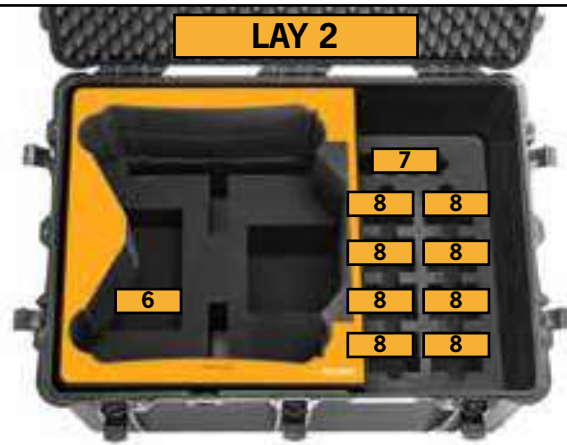

- 6** Propellers
- 7** WB37 Intelligent Battery
- 8** TB60 Intelligent Flight Battery



HPRC DJI MATRICE 300 RTK

TECHNICAL FEATURES


Dimension:
Internal dimension
748,6x524,6x454,6(mm) - 29.47x20.65x17.9(in)
External dimension
813,3x586,5x480,5(mm) - 32.02x23.9x18.92(in)

Weight:
empty: 13,20 kg - 29.10 lbs
with foam: 15,84 kg - 34.91 lbs

Temperature rating:
Minimum
-40°C -40°F
Maximum
+80°C +176°F



TECHNICAL DRAWING

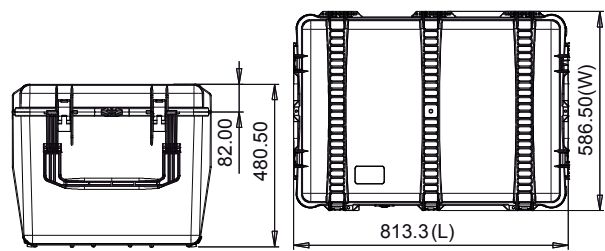

HPRC2550W for Battery DJI Matrice 300 BAT2550W-04



- 1 TB60 Intelligent Flight Battery
- 2 WB37 Intelligent Battery
- 3 Various/Perfect for Dry Keeper



TECHNICAL FEATURES


Dimension:
 internal dimension
 513x288x200(mm) - 20.19x11.34x7.87(in)
 external dimension
 549x346x236(mm) - 21.61x13.62x9.29(in)

Weight:
 empty: 4.35kg - 9.57lbs

Temperature rating:
 Minimum Maximum
 -40°C -40°F +80°C +176°F



TECHNICAL DRAWING

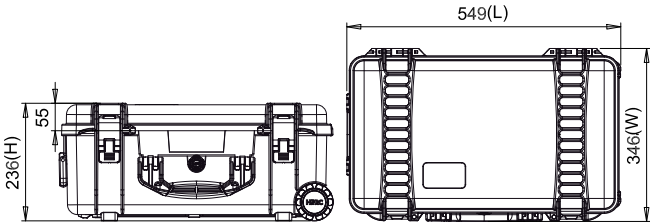

HPRC2400 for DJI Air 2S and Mavic Air 2 MAV2A-2400-02



- 1 DJI Air 2S and Mavic Air 2
- 2 Intelligent Flight Battery
- 3 Battery Charging Hub
- 4 Propellers
- 5 Battery to Power, Bank Adaptor
- 6 Nd Filter Set
- 7 Remote Controller/Smart controller
- 8 Battery Charger
- 9 Cable



HPRC DJI AIR 2 / AIR 2S

TECHNICAL FEATURES


Dimension:
 Internal dimension
 377x263,9x150,8(mm) - 14.84x10.39x5.94(in)
 External dimension
 402X330,5X169,2(mm) - 15.83x13.01x6.66(in)

Weight:
 empty: 2.38 kg – 5.25 lbs
 with foam: 2.49 kg -5.49 lbs

Temperature rating:
 Minimum Maximum
 -40°C -40°F +80°C +176°F



TECHNICAL DRAWING

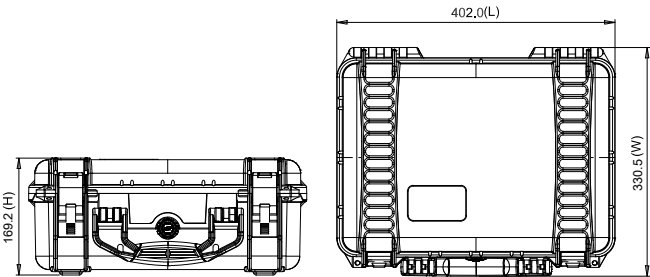

HPRC2300 for DJI Air 2S and Mavic Air 2 Fly More Combo

MAV2A-2300-02



- 1 DJI Air 2S and Mavic Air 2 Fly More Combo
- 2 Battery Charger
- 3 Intelligent Flight Battery
- 4 Remote Controller/Smart Controller
- 5 Propellers
- 6 Nd Filter Set
- 7 Cable



TECHNICAL FEATURES


Dimension:
Internal dimension
305,7x232,4x137,5(mm) - 12.04x9.15x5.41(in)
External dimension
334,6x303x155,2(mm) - 13.17x11.93x6.11(in)

Weight:
empty: 1,75 kg - 3.86 lbs
with foam: 1,88 kg - 4.13 lbs

Temperature rating:
Minimum Maximum
-40°C -40°F +80°C +176°F




TECHNICAL DRAWING

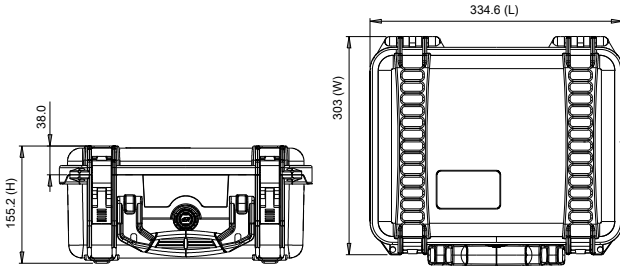

HPRC3500 for DJI Air 2S and Mavic Air 2 Fly More Combo

MAV2A-3500-01

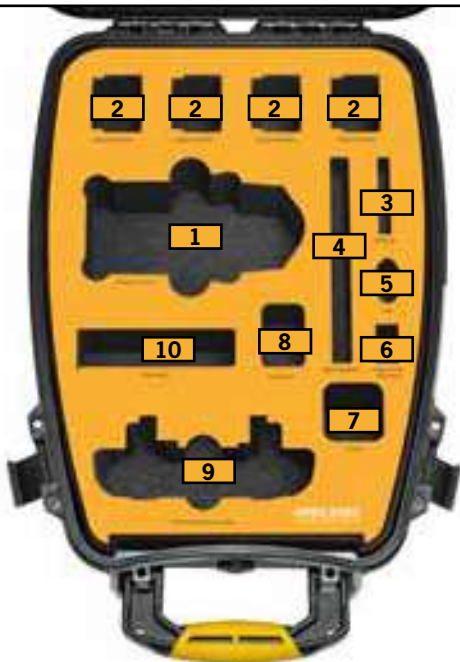

- 1 DJI Mavic Air 2 / Air 2S
- 2 Intelligent Flight Battery
- 3 Nd Filter Set
- 4 Battery Charging Hub
- 5 Cable
- 6 Battery to Power, Bank Adaptor
- 7 Propellers
- 8 Miscellaneous
- 9 Remote/Smart controller
- 10 Battery Charger



TECHNICAL FEATURES


Dimension:
internal dimension
433,5x319,3x168,8(mm) - 17.07x12.57x6.65(in)
external dimension
497,9x370,3x184,9(mm) - 19.6x14.58x7.28(in)

Weight:
empty: 3,00kg - 6.61lbs
with cubed foam: 3,55kg - 7.82lbs

Temperature rating:
Minimum Maximum
-40°C -40°F +80°C +176°F




TECHNICAL DRAWING

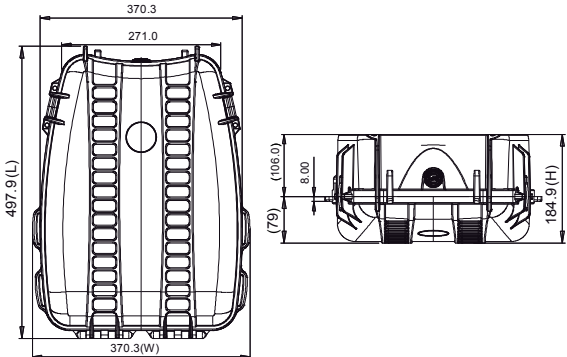

HPRC DJI AIR 2 / AIR 2S

Bag for DJI Air 2S and Mavic Air 2 Fly More Combo

MAVBAG35-04

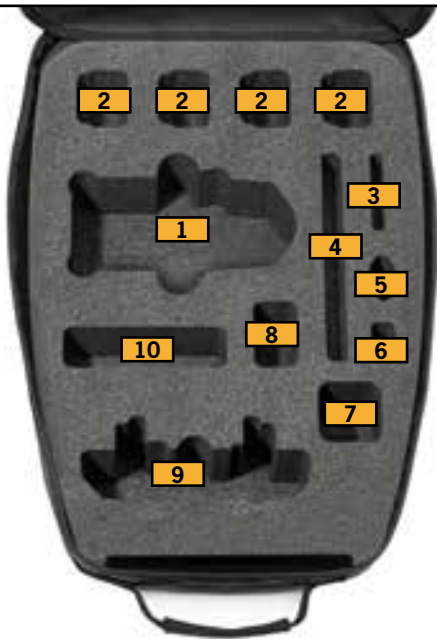

- 1 DJI Air 2S and Mavic Air 2 Fly More Combo
- 2 Intelligent Flight Battery
- 3 Nd Filter Set
- 4 Battery Charging Hub
- 5 Cable
- 6 Battery to Power, Bank Adaptor
- 7 Propellers
- 8 Miscellaneous
- 9 Remote Controller/Smart Controller
- 10 Battery Charger

TECHNICAL FEATURES

Dimension:
internal dimension
433x319x169(mm) - 17.05x12.56x6.65(in)
external dimension
498x370x185(mm) - 19.61x14.57x7.28(in)



HPRC2300 FOR DJI Mini 2 Combo Fly More

MAVM-2300-02



- 1 Aircraft
- 2 Cable/Miscellaneous
- 3 Intelligent Flight Battery
- 4 DJI 18W USB Charger
- 5 Two-Way Charging Hub
- 6 Remote Controller
- 7 Propellers



TECHNICAL FEATURES


Dimension:
Internal dimension
305,7x232,4x137,5(mm) - 12.04x9.15x5.41(in)
External dimension
334,6x303x155,2(mm) - 13.17x11.93x6.11(in)

Weight:
empty: 1,77kg - 3.89lbs
with cubed foam: 1,96kg - 4.32lbs

Temperature rating:
Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

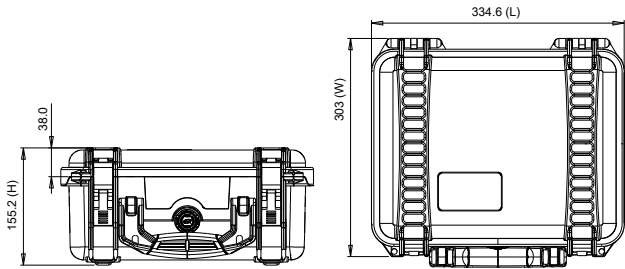

HPRC2500 for DJI FPV Combo

FPV-2500-01



- 1 DJI FPV Drone
- 2 Goggles Battery
- 3 Fly More kit
- 4 Goggles V2 with Goggles Antenna (or TrueRC) mounted
- 5 Remote Controller
- 6 Motion Controller
- 7 AC Power Adaptor
- 8 Intelligent Flight Battery
- 9 Propellers (Pair)/Cable



TECHNICAL FEATURES


Dimension:
internal dimension
449,8x322,9x174,9(mm) - 17.71x12.71x6.89(in)
external dimension
478,1x389,4x194(mm) - 18.82x15.33x7.64(in)

Weight:
empty: 3,22kg - 7.10lbs
with cubed foam: 3,69kg - 8.12lbs

Temperature rating:
Minimum -40°C -40°F
Maximum +80°C +176°F




TECHNICAL DRAWING

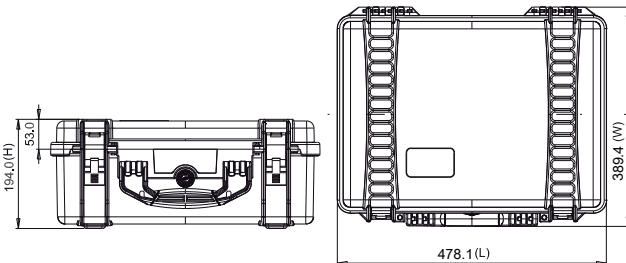

HPRC3600 for DJI FPV Combo

FPV-3600-01

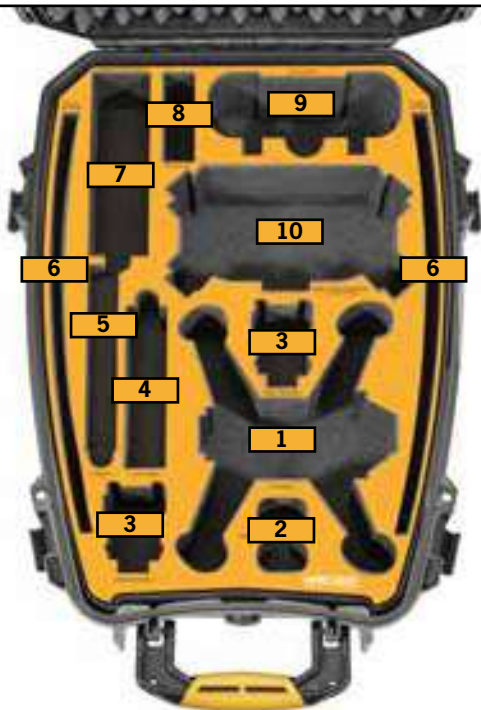

- 1 DJI FPV Drone
- 2 Goggles Battery
- 3 Intelligent Flight Battery
- 4 AC Power Adaptor
- 5 Fly More kit
- 6 Propellers (Pair)/Cable
- 7 Miscellaneous/Motion Controller
- 8 Miscellaneous
- 9 Remote Controller
- 10 Goggles V2 with Goggles Antenna (or TrueRC) mounted



TECHNICAL FEATURES


Dimension:
Internal dimension
479x354x194(mm) - 18.86x13.94x7.64(in)
External dimension
542x402x220(mm) - 21.34x15.83x8.66(in)

Weight:
empty: 3,23 kg - 7,11 lbs
with foam: 3,75 kg - 8,26 lbs

Temperature rating:
Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

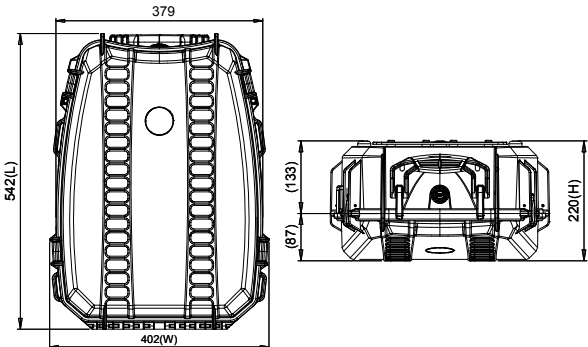

HPRC2710 for DJI Phantom 4 PHA4-2710-02



- 1 DJI Phantom 4 / Pro / 4 Pro + with Props On / 4 V2.0
- 2 Cables / Miscellaneous
- 3 3 x Filters
- 4 Charger + Cables
- 5 2 x Kits of Spare Props
- 6 Spare Battery
- 7 Spare Battery / Miscellaneous Accessories
- 8 Complimentary HPRC1100 for 8 MicroSD Cards
- 9 Ipad Air / Tablet up to 10"
- 10 Controller Monitor Hood for Tablets / Instructions
- 11 Remote Controller
- 12 Cables
- 13 Small Tools

suitable for v 2.0 low noise propellers

TECHNICAL FEATURES


Dimension:
 Internal dimension
 555x459x256(mm) - 21.85x18.07x10.08(in)
 External dimension
 617x525x280(mm) - 24.29x20.67x11.02(in)

Weight:
 empty: 6.71kg - 14.76lbs

Temperature rating:
 Minimum Maximum
 -40°C -40°F +80°C +176°F



TECHNICAL DRAWING

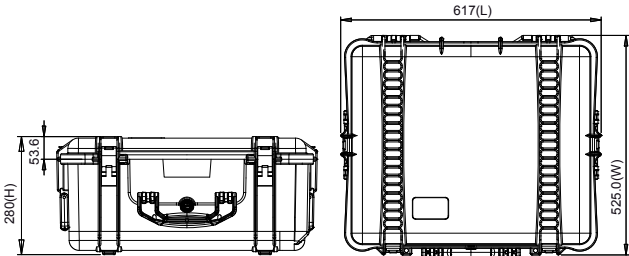

HPRC2700W for DJI Phantom 4

PHA4-2700W-02



- 1 | 1 Phantom 4 / Pro / 4 Pro + with Props On / 4 V2.0
- 2 | Cables / Miscellaneous
- 3 | 3 x Filters
- 4 | Charger + Cables
- 5 | 2 x Kits of Spare Props
- 6 | Spare Battery
- 7 | Spare Battery / Miscellaneous Accessories
- 8 | Complimentary HPRC1100 for 8 MicroSD Cards
- 9 | Ipad Air / Tablet up to 10"
- 10 | Controller Monitor Hood for Tablets / Instructions
- 11 | Remote Controller
- 12 | Cables
- 13 | Small Tools



suitable for v 2.0 low noise propellers

TECHNICAL FEATURES


Dimension:
Internal dimension
554,7x458,7x246(mm) - 21.84x18.06x9.69(in)
External dimension
617,5x527,3x279,6(mm) - 24.31x20.76x11.0(in)

Weight:
empty: 7,70kg - 16.98lbs
with cubed foam: 8,72kg - 19.21lbs

Temperature rating:
Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

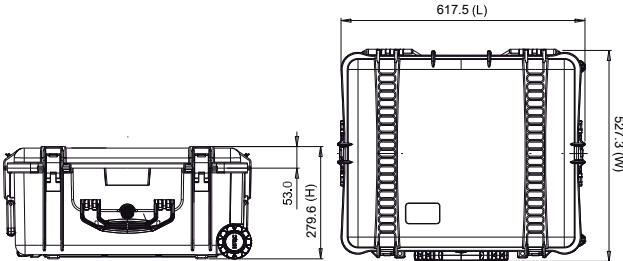


Bag for DJI Phantom 4

PHA4-BAG27-02



HPRC DJI PHANTOM 4

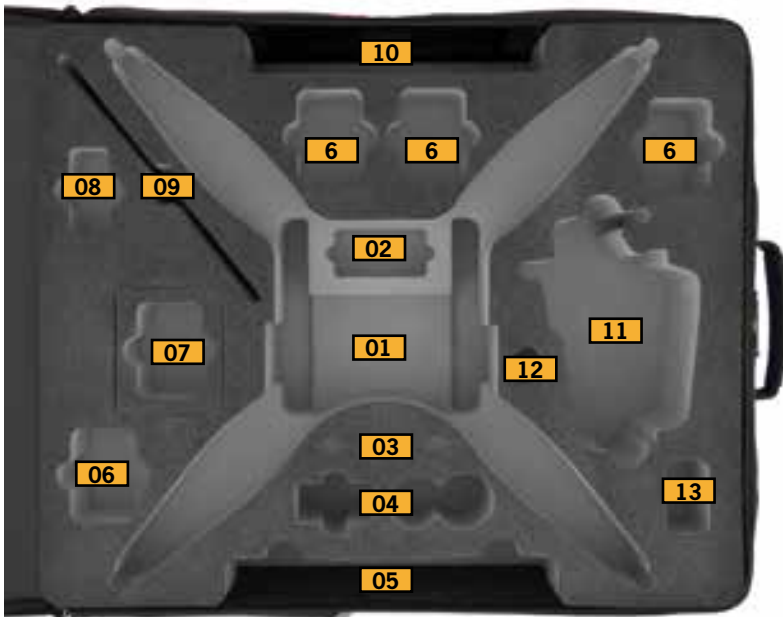

- 1 | Phantom 4 / Pro / 4 Pro + with Props On / 4 V2.0
- 2 | Cables / Miscellaneous
- 3 | 3 x Filters
- 4 | Charger + Cables
- 5 | 2 x Kits of Spare Props
- 6 | Spare Battery
- 7 | Spare Battery / Miscellaneous Accessories
- 8 | Complimentary HPRC1100 for 8 MicroSD Cards
- 9 | Ipad Air / Tablet up to 10"
- 10 | Controller Monitor Hood for Tablets / Instructions
- 11 | Remote Controller
- 12 | Cables
- 13 | Small Tools

suitable for v 2.0 low noise propellers

Dimension: external dimension
560x470x235(mm) - 22.05x18.50x9.25(in)

Weight:
empty: 7,70 kg - 16,98 lbs
with foam: 8,72 kg - 19,21 lbs



HPRC2400 for DJI Mavic 2

MAV2-2400BLK-02



- 1 Smart Controller/Battery Charger, Cables
- 2 Remote Controller/Battery Charger, Cables
- 3 Battery Charger/Adapter, Various
- 4 DJI Mavic 2 PRO / ZOOM (Intelligent Flight Battery and Gimbal Protector Included)
- 5 Propellers
- 6 Usb Adapter
- 7 Little Accessories
- 8 Usb Power Adapter/cable
- 9 Intelligent Flight Batteries



HPRC DJI MAVIC 2

TECHNICAL FEATURES


Dimension:
internal dimension
377x263,9x150,8(mm) - 14.84x10.39x5.94(in)
external dimension
402x330,5x169,2(mm) - 15.83x13.01x6.66(in)

Weight:
empty: 2,38 kg - 5.25 lbs
with foam: 2,47 kg - 5.45 lbs

Temperature rating:
Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

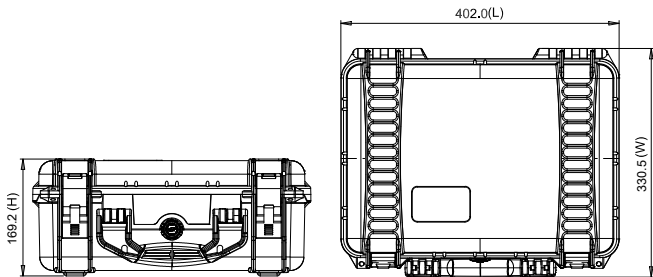

HPRC3500 for DJI Mavic 2 MAV2-3500BLK-02



- 1 DJI Mavic 2 PRO / ZOOM (Intelligent Flight Battery and Gimbal Protector Included)
- 2 Remote Controller/Smart Controller
- 3 Intelligent Flight Batteries
- 4 Usb Power Adapter/cable
- 5 Mavic 2 Car Charger
- 6 Battery Charging Hub /Adapter, Various
- 7 Various / Usb Adaptor
- 8 Cables
- 9 Battery Charging Hub /Adapter, Various



TECHNICAL FEATURES


Dimension:
 internal dimension
 433,5x319,3x168,8(mm) - 17.07x12.57x6.65(in)
 external dimension
 497,9x370,3x184,9(mm) - 19.6X14.58x7.28(in)

Weight:
 empty: 3,20 kg - 7.04 lbs
 with foam: 3,61 kg - 7.95 lbs

Temperature rating:
 Minimum Maximum
 -40°C -40°F +80°C +176°F



TECHNICAL DRAWING

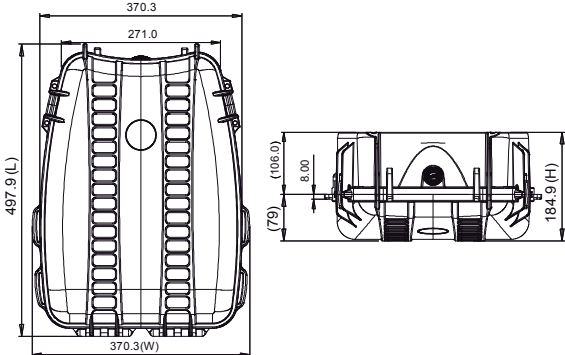

Bag for DJI Mavic 2 MAVBAG35-03




- 1 DJI Mavic 2 PRO / ZOOM (Intelligent Flight Battery and Gimbal Protector Included)
- 2 Remote Controller/Smart Controller
- 3 Intelligent Flight Batteries
- 4 Usb Power Adapter/cable
- 5 Mavic 2 Car Charger
- 6 Battery Charging Hub /Adapter, Various
- 7 Various / Usb Adaptor
- 8 Cables
- 9 Battery Charging Hub /Adapter, Various

TECHNICAL FEATURES


Dimension:
 internal dimension
 433x319x169(mm) - 17.05x12.56x6.65(in)
 external dimension
 498x370x185(mm) - 19.61x14.57x7.28(in)
Weight:
 empty: 0,71 kg - 1,57 lbs
 with foam: 0,91 kg - 2.01 lbs




HPRC2780W for DJI Inspire 2 INS2-2780W-02

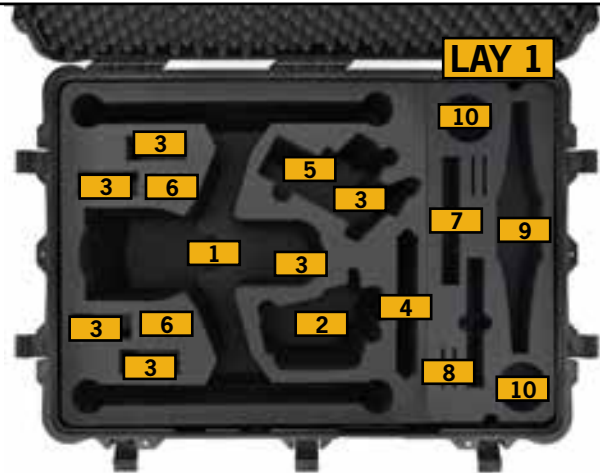

- 1** DJI Inspire 2 in Landing Mode with Gimbal X7 Attached
- 2** Transmitter (Radio Controller)
- 3** Spare Flight Battery
- 4** Crystal Monitor 7.85"
- 5** Cendence Remote Controller
- 6** SSD
- 7** Charger
- 8** Filters
- 9** Props + Spare Props
- 10** Charging Hub

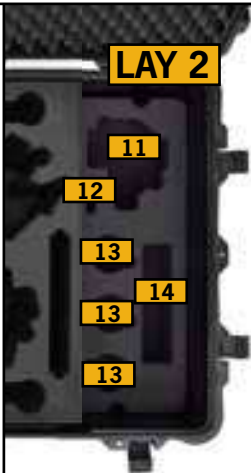

- 11** Gimbal
- 12** Gimbal's Lid
- 13** Lens
- 14** Cables / Miscellaneous

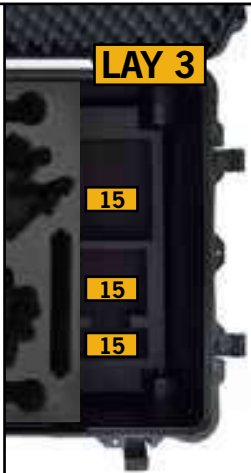

- 15** Miscellaneous / Small Accessories

TECHNICAL FEATURES

Dimension:

Internal dimension
 748,6x524,6x363,3(mm) - 29.47x20.65x14.3(in)
 External dimension
 814x586,5x387,7(mm) - 32.05x23.09x15.27(in)

Weight:


empty: 12,22kg - 26.94lbs
 with cubed foam: 14,63kg - 32.24lbs

Temperature rating:

Minimum Maximum
 -40°C -40°F +80°C +176°F



TECHNICAL DRAWING

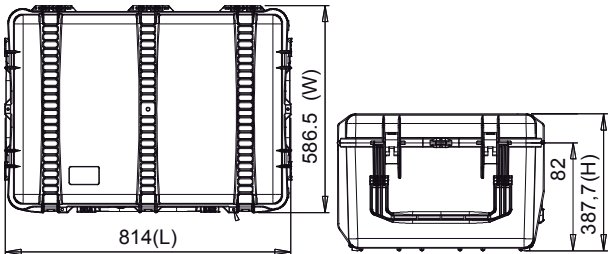

HPRC4600 for DJI Inspire 2

INS2-4600W-02



- 1** DJI Inspire 2 in Landing Mode with Gimbal X7 Attached
- 2** Standard Radio Controller
- 3** Spare Flight Battery
- 4** Ipad Mini / Tablet up to 7.9"
- 5** Props + Spare Props
- 6** Charger
- 7** SSD
- 8** CrystalSky 7.85"

- 9** Gimbal
- 10** Battery
- 11** Cables / Miscellaneous
- 12** Lens
- 13** Crystal Monitor
- 14** Charging Hub
- 15** Cendence Remote Controller

TECHNICAL FEATURES


Dimension:
Internal dimension
611x611x375(mm) - 24.05x24.05x14.76(in)
external dimension
670x677x418,5(mm) - 26.38x26.65x16.48(in)

Weight:
empty: 10,85 kg - 23.92 lbs
with foam: 12,90 kg - 28.43 lbs

Temperature rating:
Minimum -40°C -40°F
Maximum +80°C +176°F



TECHNICAL DRAWING

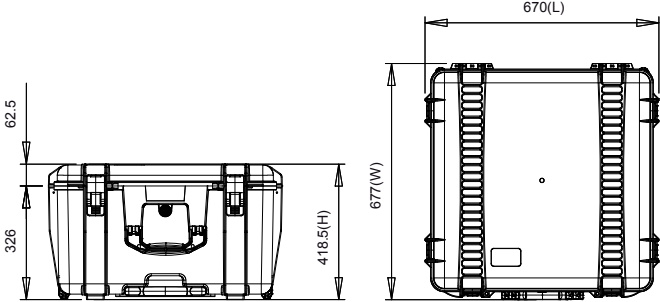

HPRC2550 for DJI inspire 2 BAT-2550W-01




 INSPIRE 2



- 1 Battery for DJI Inspire 2
- 2 Charger Hub
- 3 Battery Charger
- 4 Miscellaneous



TECHNICAL FEATURES


Dimension:
 internal dimension
 513x288x200(mm) - 20.19x11.34x7.87(in)
 external dimension
 549x346x236(mm) - 21.61x13.62x9.29(in)

Weight:
 empty: 4,35kg - 9.57lbs

Temperature rating:
 Minimum Maximum
 -40°C -40°F +80°C +176°F



TECHNICAL DRAWING

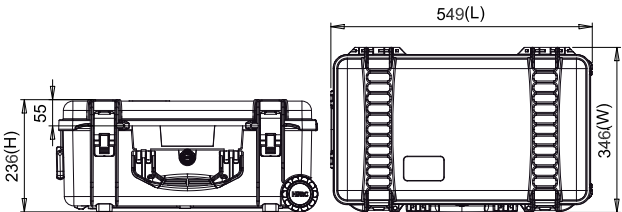

HPRC2800W for DJI Matrice 600 or Matrice 600 PRO

M600-2800W-01



- 1
- DJI Matrice 600 // Matrice 600 Pro (Batteries TB47S Attached)
- 2
- Hex Charger
- 3
- Remote Controller
- 4
- Landing Gear
- 5
- Cable
- 6
- Landing Gear



HPRC DJI MATRICE 600 | 600 PRO

TECHNICAL FEATURES

Dimension:

Internal dimension
748,6x524,6x454,6(mm) - 29.47x20.65x17.9(in)
External dimension
813,3x586,5x480,5(mm) - 32.02x23.9x18.92(in)

Weight:


empty: 13,20 kg - 29.10 lbs
with foam: 15,31 kg – 33.75 lbs

Temperature rating:

Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

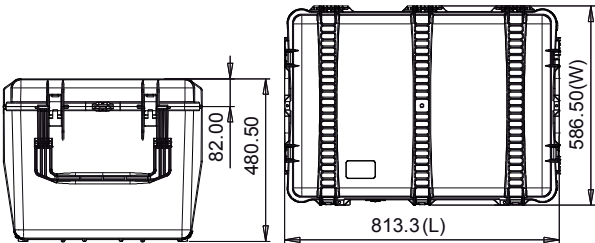

HPRC4600W for DJI Matrice 200/210 v.2.0

M210-4600W-04



LAY 1

LAY 2



LAY 1



LAY 2

- 1** DJI Matrice 200/210 v.2.0 with 1 Gimbal Connector, 2 cameras, 2 GPS kit, 2 batteries TB55 mounted
- 2** Cendence Remote Controller
- 3** Cendence Remote Controller
- 4** CrystalSky Battery (WB37)
- 5** Charging Hub for CrystalSky (WCH2)
- 6** CrystalSky 7.85" with sun hood mounted
- 7** Charging Hub (IN2)
- 8** x 1 battery TB55
- 9** Battery Charger
- 10** x 4 Propellers Air

- 11** x 1 battery TB55
- 12** Small Accessories



TECHNICAL FEATURES

Dimension:

internal dimension
611x611x375(mm) - 24.05x24.05x14.76(in)
external dimension
670x677x418.5(mm) - 26.38x26.65x16.48(in)

Weight:


empty: 9,9kg - 21.83lbs

Temperature rating:

Minimum Maximum
-40°C -40°F +80°C +176°F




TECHNICAL DRAWING

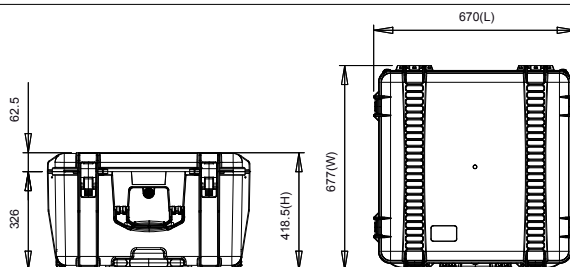

HPRC2550W Battery Case for DJI Matrice 200/210 v.2.0 **BAT-2550W-02**



dji
 BATTERY CASE
 FOR DJI Matrice 210/v 2.0

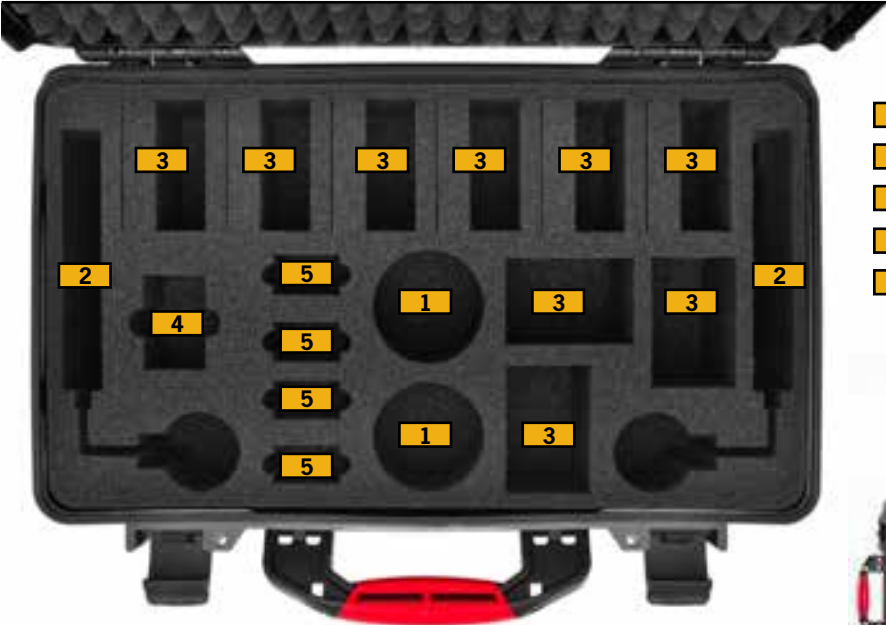

- 1** Charging Hub
- 2** Battery Charger
- 3** Battery TB50 or TB55
- 4** Charging Hub for CristalSky (WCH2)
- 5** CrystalSky Battery (WB37)



TECHNICAL FEATURES

Dimension:

internal dimension
 513x288x200(mm) - 20.19x11.34x7.87(in)
 external dimension
 549x346x236(mm) - 21.61x13.62x9.29(in)

Weight:


empty: 4.35kg - 9.57lbs

Temperature rating:

Minimum Maximum
 -40°C -40°F +80°C +176°F



TECHNICAL DRAWING

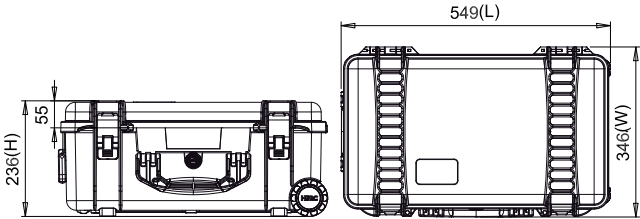

HPRC2730W for DJI Ronin 4D-6K Combo R4D-2730W-01



- 1 DJI Ronin 4D Mounted
- 2 Charger
- 3 Lens DL 24/35/50 mm F2.8 LS
- 4 DL Mount
- 5 MRW-G1.SYM (Sony)
- 6 DJI Prossd 1TB
- 7 Various/Miscellaneous
- 8 DJI High-Bright Remote Monitor
- 9 DJI Zenmuse X9 Counterweight
- 10 CF Express Type B
- 11 NP-F970 (Sony)
- 12 TB50 Intelligent Flight Battery
- 13 Various/Miscellaneous



TECHNICAL FEATURES


Dimension:
 Internal dimension
 503x459x316(mm) - 19.80x18.07x12.44(in)
 External dimension
 616,9x531x349,6(mm) - 24.29x20.91x13.76(in)

Weight:
 empty: 8,41kg - 18.54lbs
 with cubed foam: 10,43kg - 22.99lbs

Temperature rating:
 Minimum Maximum
 -40°C -40°F +80°C +176°F



TECHNICAL DRAWING

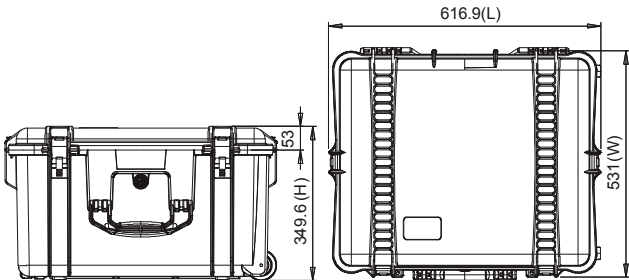



HPRC2300 for DJI Smart Controller Enterprise

SCE-2300-01



- 1 DJI Smart Controller Enterprise
- 2 Miscellaneous
- 3 Wb37 Intelligent Battery



TECHNICAL FEATURES


Dimension:
Internal dimension
305,7x232,4x137,5(mm) - 12.04x9.15x5.41(in)
External dimension
334,6x303x155,2(mm) - 13.17x11.93x6.11(in)

Weight:
empty: 1,75kg - 3.86lbs

Temperature rating:
Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

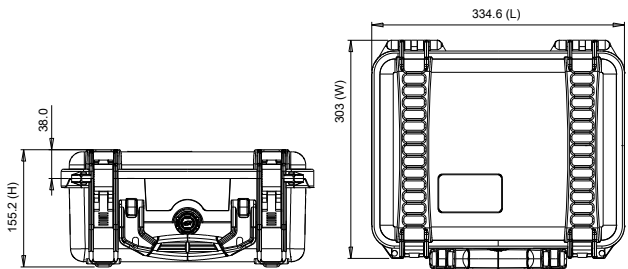

HPRC2460 for DJI Cendence

CEN2460-02



for DJI CENDENCE remote controller



- 1 Cendence Remote Controller
- 2 CrystalSky 7.85"
- 3 Battery Charger
- 4 Charging hub for CrystalSky
- 5 CrystalSky Battery



HPRC DJI CENDENCE

TECHNICAL FEATURES

Dimension:


internal dimension
409x306x175(mm) - 16.1x12.05x6.89(in)
external dimension
435x377,8x193(mm) - 17.13x14.87x7.60(in)

Weight:

empty: 2,57kg - 5.65lbs
with cubed foam: 2,88kg - 6.35lbs

Temperature rating:

Minimum Maximum
-40°C -40°F +80°C +176°F

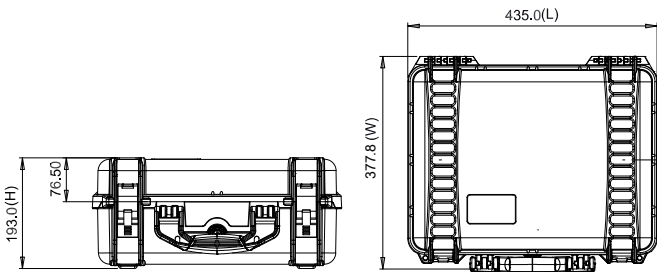

HPRC1400 for DJI Action 2 Dual-Screen Combo

ACT2-1400-01



- 1 DJI Action 2 with Ball-Joint Adapter Mount
- 2 Rear Touchscreen Display with Magnetic Adapter Mount
- 3 Magnetic Lanyard
- 4 Magnetic Support
- 5 Power Cable



TECHNICAL FEATURES


Dimension:
Internal dimension
180x110x40(mm) - 7.08x4.33x1.57(in)
External dimension
200,3x142,4x48(mm) - 7.89x5.61x1.89(in)

Weight:
empty: 0,26kg - 0,57lbs

Temperature rating:
Minimum
-40°C -40°F
Maximum
+80°C +176°F



TECHNICAL DRAWING

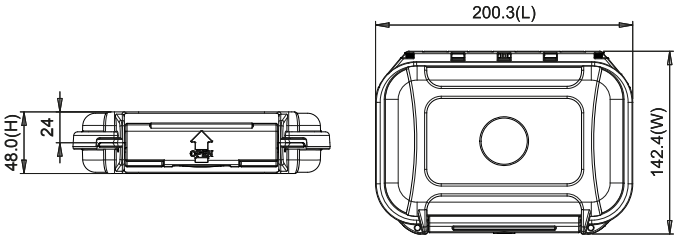

HPRC 1400 for DJI POCKET 2 CREATIVE COMBO KIT OSMPKT-1400-02



- 1 DJI Pocket 2 with 1/4"-20 Tripod Mounted
- 2 Micro Tripod
- 3 Mini Control Stick
- 4 Cable/Wireless Microphone Windscreen
- 5 Do-it-All Handle
- 6 Wireless Microphone Transmitter/SD Card
- 7 Wide-Angle Lens
- 8 Lightning (iOS) Smartphone Adapter/ USB Type-C Smartphone Adapter



HPRC DJI POCKET 2

TECHNICAL FEATURES


Dimension:
 internal dimension
 180x110x40(mm) - 7.08x4.33x1.57(in)
 external dimension
 200,3x142,4x48(mm) - 7.89x5.61x1.89(in)

Weight:
 empty: 0,26kg - 0.57lbs

Temperature rating:
 Minimum Maximum
 -40°C -40°F +80°C +176°F



TECHNICAL DRAWING

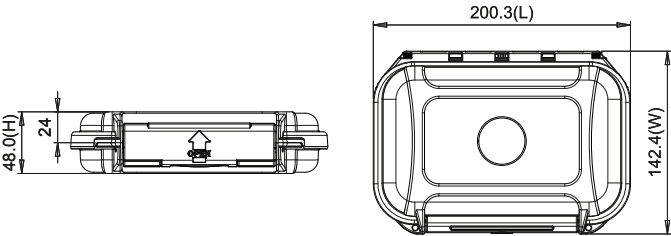

HPRC1400 for DJI OSMO POCKET OSMPKT-1400-01



- 1 DJI Osmo Pocket
- 2 Accessories / Power Cable
- 3 SD Card Rack
- 4 Smartphone adapters



HPRC DJI OSMO POCKET

TECHNICAL FEATURES


Dimension:
 internal dimension
 180x110x40(mm) - 7.08x4.33x1.57(in)
 external dimension
 200,3x142,4x48(mm) - 7.89x5.61x1.89(in)

Weight:
 empty: 0,26kg - 0.57lbs

Temperature rating:
 Minimum Maximum
 -40°C -40°F +80°C +176°F



TECHNICAL DRAWING

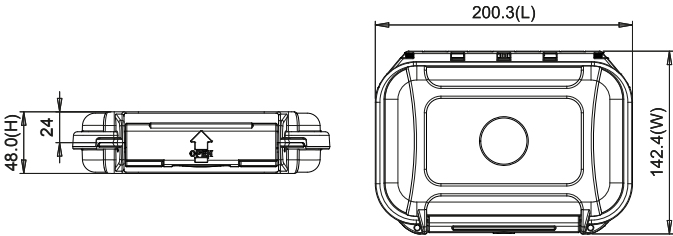

HPRC1400 for DJI OSMO ACTION OSMACT-1400-01



- 1 Osmo Action and Camera Frame
- 2 Battery
- 3 Quick Release Base
- 4 SD Card Rack
- 5 USB-C Cable Flat
- 6 Locking Screw



HPRC DJI OSMO ACTION



TECHNICAL FEATURES

Dimension:
 internal dimension
 180x110x40(mm) - 7.08x4.33x1.57(in)
 external dimension
 200,3x142,4x48(mm) - 7.89x5.61x1.89(in)

Weight:
 empty: 0,26kg - 0.57lbs

Temperature rating:
 Minimum Maximum
 -40°C -40°F +80°C +176°F

TECHNICAL DRAWING



HPRC2500 for DJI RS 2 Pro Combo

RS2-2500-01



- 1 Gimbal
- 2 Cable/Miscellaneous
- 3 Briefcase Handle
- 4 Phone Holder
- 5 Image Transmitter
- 6 Quick-Release Plate (Arca-Swiss/Manfrotto)
- 7 Focus Motor
- 8 BG30 Grip
- 9 Extended Grip/Tripod (Metal)



TECHNICAL FEATURES


Dimension:
internal dimension
449,8x322,9x174,9(mm) - 17.71x12.71x6.89(in)
external dimension
478,1x389,4x194(mm) - 18.82x15.33x7.64(in)

Weight:
empty: 3,22kg - 7.10lbs
with cubed foam: 3,79kg - 8.34lbs

Temperature rating:
Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

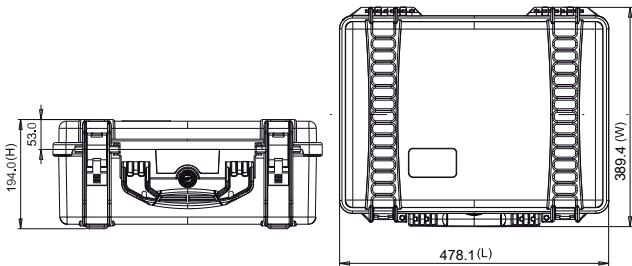

HPRC3500 for DJI RS 2 Pro Combo

RS2-3500-01



- 1 Gimbal
- 2 Cable/Miscellaneous
- 3 Quick-Release Plate (Arca-Swiss/Manfrotto)
- 4 Briefcase Handle
- 5 BG30 Grip/ Extended Grip/Tripod (Metal)
- 6 Phone Holder
- 7 Cable/Miscellaneous



TECHNICAL FEATURES


Dimension:
internal dimension
433x319x168,8(mm) - 17.07x12.57x6.65(in)
external dimension
497,9x370,3x184,9(mm) - 19.6x14.58x7.28(in)

Weight:
empty: 3.00kg - 6.61lbs
with cubed foam: 3.55kg - 7.82lbs


Temperature rating:
Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

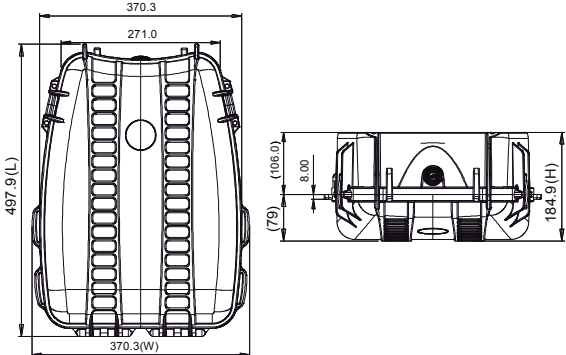

HPRC Bag for DJI RS 2 Pro Combo RS2-BAG35-01

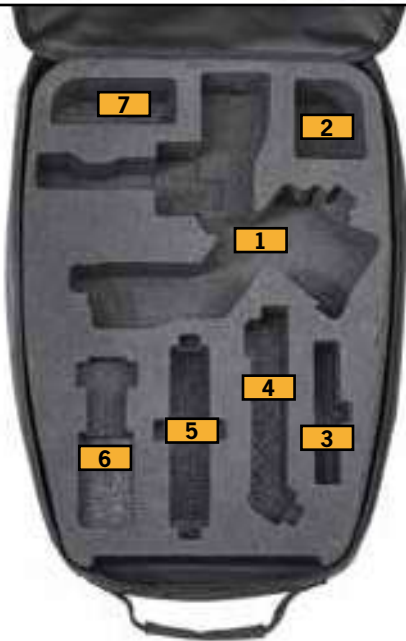

- 1 Gimbal
- 2 Cable/Miscellaneous
- 3 Quick-Release Plate (Arca-Swiss/Manfrotto)
- 4 Briefcase Handle
- 5 BG30 Grip/ Extended Grip/Tripod (Metal)
- 6 Phone Holder
- 7 Cable/Miscellaneous

TECHNICAL FEATURES


Dimension:

internal dimension
 433x319x169(mm) - 17.05x12.56x6.65(in)
 external dimension
 498x370x185(mm) - 19.61x14.57x7.28(in)



HPRC2500 for DJI RSC 2 Pro Combo

RSC2-2500-01

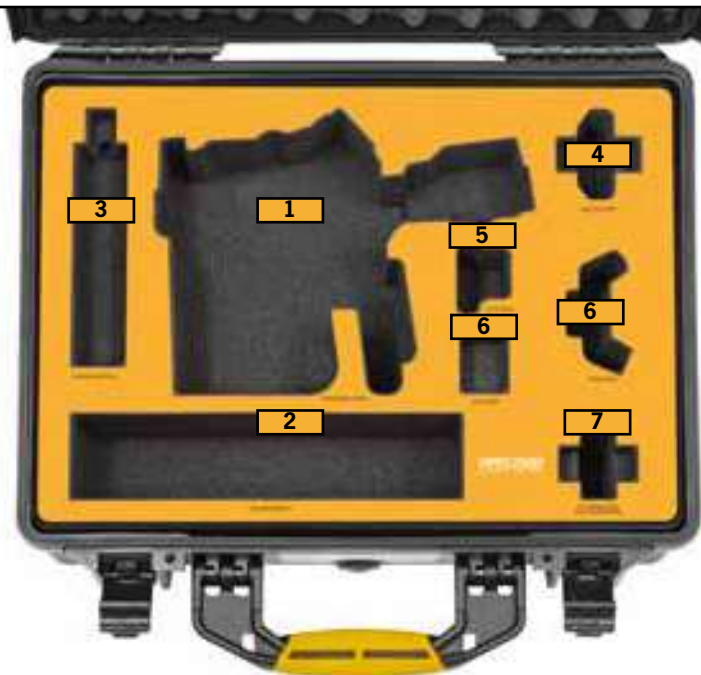

- 1 Gimbal (Built-In Battery)
- 2 Cable/Miscellaneous
- 3 Extended Grip/Tripod
- 4 Image Transmitter
- 5 Focus Motor
- 6 Phone Holder
- 7 Quick-Release Plate (Arca-Swiss/Manfrotto)



HPRC DJI RSC 2 PRO COMBO

TECHNICAL FEATURES


Dimension:
internal dimension
449,8x322,9x174,9(mm) - 17.71x12.71x6.89(in)
external dimension
478,1x389,4x194(mm) - 18.82x15.33x7.64(in)

Weight:
empty: 3,22kg - 7.10lbs
with cubed foam: 3,78kg - 8.33lbs

Temperature rating:
Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

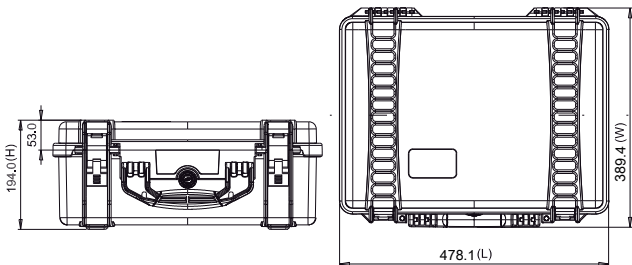



AUTEL ROBOTICS

READY MADE SOLUTIONS – 2022

HPRC2400 Autel Robotics EVO II 6K / 8K Drone

EV02-2400-02



- 1 Autel Robotics EVO II 6K / 8K with propellers - low noise
- 2 Remote Controller
- 3 Battery Charging Hub
- 4 Flight Battery
- 5 Cable/Propellers/Accessories
- 6 Micro USB Cable
- 7 Charger



TECHNICAL FEATURES


Dimension:
Internal dimension
377x263,9x150,8(mm) - 14.84x10.39x5.94(in)
External dimension
402x330,5x169,2(mm) - 15.83x13.01x6.66(in)

Weight:
empty: 2,38kg - 5.25lbs

Temperature rating:
Minimum
-40°C -40°F
Maximum
+80°C +176°F



TECHNICAL DRAWING

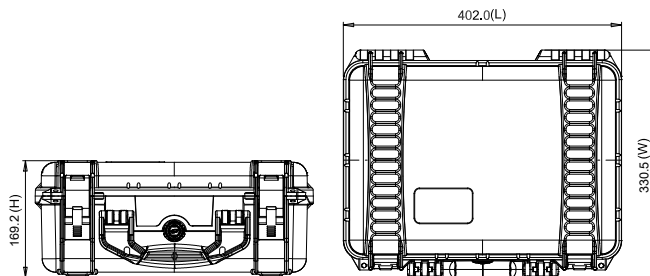

HPRC AUTEL ROBOTICS EVO NANO+

HPRC2300 for Autel Robotics Evo Nano+ Premium Bundle

NANO-2300-01



- 1 Autel EVO Nano+ including battery, propellers, gimbal cover and propeller holder
- 2 Spare Propellers
- 3 Spare Battery
- 4 Remote Control
- 5 Cables/Miscellaneous
- 6 Power Adapter
- 7 Multi-Charger



TECHNICAL FEATURES


Dimension:
Internal dimension
305,7x232,4x137,5(mm) - 12.04x9.15x5.41 (in)
External dimension
334,6x303x155,2(mm) - 13.17x11.93x6.11(in)

Weight:
empty: 1,70kg - 3.75lbs
with foam: 1,9kg - 4.19lbs

Temperature rating:
Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

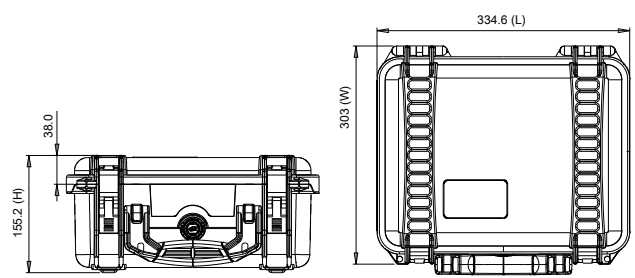





ATOMOS

READY MADE SOLUTIONS – 2022

HPRC2300 for Atomos Ninja V

NJAV-2300-01



- 1 Ninja Atomos V with AtomX SSD mini and Battery mounted
- 2 Ninja V Sunhood
- 3 Battery
- 4 12V-3A AC Power Supply
- 5 Cables/Miscellaneous
- 6 3 Master Caddy II
- 7 Lector docking station USB-C 3.1
- 8 Battery Eliminator
- 9 Power kit Atomos



HPRC ATOMOS NINJA V

TECHNICAL FEATURES


Dimension:
Internal dimension
305,7x232,4x137,5(mm) - 12.04x9.15x5.41(in)
External dimension
334,6x303x155,2(mm) - 13.17x11.93x6.11(in)

Weight:
empty: 1,75kg - 3.86lbs
with cubed foam: 1,90kg - 4.19lbs

Temperature rating:
Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

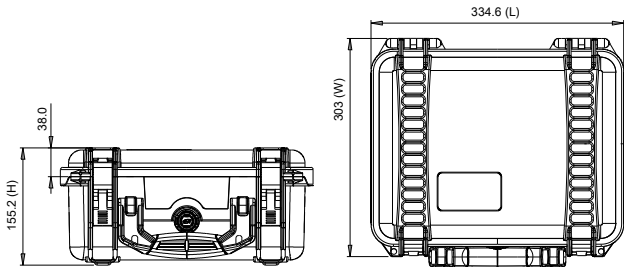

HPRC2400 Atomos Shogun 7 + Accessory Kit

SHG7-2400-01



- 1 Atomos Shogun 7
- 2 USB 3.0 docking station
- 3 International Adapter
- 4 Cable
- 5 Fast charger
- 6 NP-F750 5200mAh Batteries
- 7 HDR Sunhood
- 8 Master Caddy II drive caddies
- 9 AC Power Adapter
- 10 Miscellaneous Accessories



TECHNICAL FEATURES


Dimension:
Internal dimension
377x263,9x150,8(mm) - 14.84x10.39x5.94(in)
External dimension
402X330,5X169,2(mm) - 15.83x13.01x6.66(in)

Weight:
empty: 2,23kg - 4.91lbs
with cubed foam: 2,46kg - 5.42lbs

Temperature rating:
Minimum -40°C -40°F
Maximum +80°C +176°F



TECHNICAL DRAWING

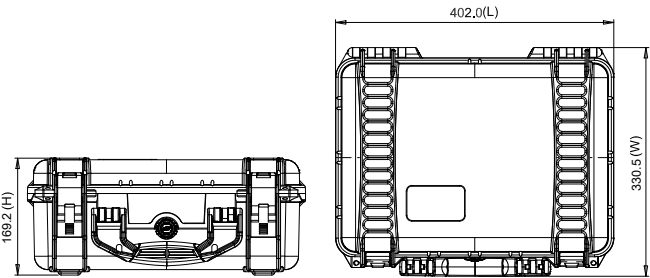

HPRC2730W for Atomos Sumo19 SM19-2730W-01



- 1 Atomos Sumo 19" Monitor Recorder
- 2 Atomos Sunhood



- 3 Charger
- 4 3 Master caddy II
- 5 DM-130A Gold Mount Mini Battery or similar
- 6 D-4BA Battery Extender or similar


TECHNICAL FEATURES

Dimension:
 internal dimension
 503x459x316(mm) - 19.80x18.07x12.44(in)
 external dimension
 616,9x531x349,6(mm) - 24.29x20.91x13.76(in)

Weight:
 empty: 8,41kg - 18.54lbs
 with cubed foam: 10,43kg - 22.99lbs

Temperature rating:
 Minimum Maximum
 -40°C -40°F +80°C +176°F

TECHNICAL DRAWING

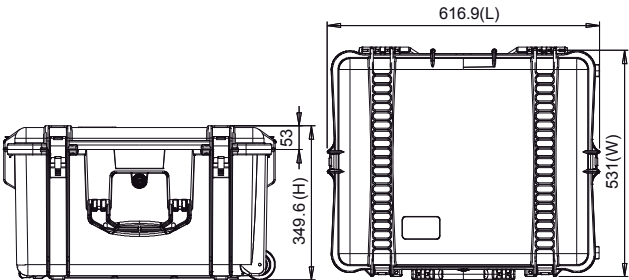



BLACKMAGIC

READY MADE SOLUTIONS – 2022

HPRC2400 for Blackmagic Pocket Cinema Camera 6K Pro

PKT6P-2400-01



- 1 Blackmagic Pocket Cinema Camera 6K Pro with or without professional cage
- 2 Lenses: Diameter Max 90mm × Length Max 220mm
- 3 International Adapters
- 4 LP-E6 Battery
- 5 30W power supply
- 6 HPRC1100MEM

HPRC BLACKMAGIC POCKET CAMERA 6K PRO

TECHNICAL FEATURES

Dimension:

Internal dimension
377x263,9x150,8(mm) - 14.84x10.39x5.94(in)
External dimension
402x330,5x169,2(mm) - 15.83x13.01x6.66(in)

Weight:


empty: 2,23kg - 4.91lbs
with cubed foam: 2,55kg - 5.62lbs

Temperature rating:

Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

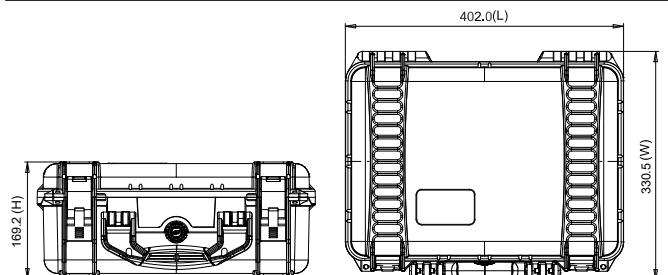

HPRC2400 COMBO for Blackmagic Pocket Cinema Camera 6K or 4K PKTC-2400-01



- 1 Cinema Blackmagic Pocket 4K or 6K with or without professional cage and Metabones mounted
- 2 Lenses: Diameter Max 90mm × Length Max 220mm
- 3 International Adapters
- 4 LP-E6 Battery
- 5 30W power supply
- 6 HPRC1100MEM

TECHNICAL FEATURES


Dimension:
 Internal dimension
 377x263,9x150,8(mm) - 14.84x10.39x5.94(in)
 External dimension
 402X330,5X169,2(mm) - 15.83x13.01x6.66(in)

Weight:
 empty: 2,23kg - 4.91lbs
 with cubed foam: 2,55kg - 5.62lbs

Temperature rating:
 Minimum Maximum
 -40°C -40°F +80°C +176°F



TECHNICAL DRAWING

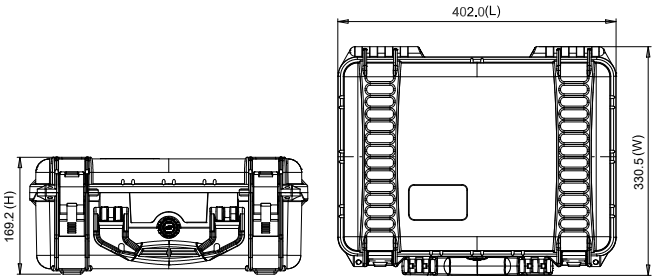

HPRC2300 for ATEM Mini, ATEM Mini Pro and ATEM Mini Pro ISO

AMI-2300-01



- 1 ATEM Mini/Mini Pro/Mini Pro ISO
- 2 Charger
- 3 Angelbird SSD2GO
- 4 Blackmagic ATEM Streaming Bridge
- 5 HDMI cables/Miscellaneous



TECHNICAL FEATURES

Dimension:

Internal dimension
305,7x232,4x137,5(mm) - 12.04x9.15x5.41(in)
External dimension
334,6x303x155,2(mm) - 13.17x11.93x6.11(in)

Weight:


empty: 1,75kg - 3.86lbs
with cubed foam: 1,90kg - 4.19lbs

Temperature rating:

Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

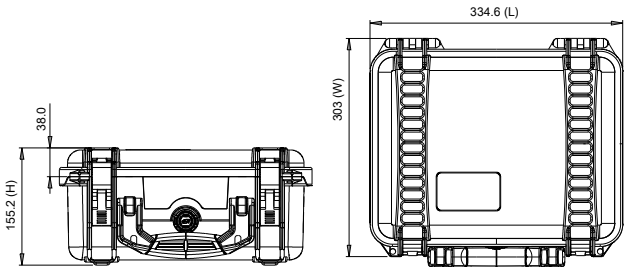

HPRC2500 for ATEM Mini Extreme and Atem Mini Extreme ISO

AME-2500-01



- 1** ATEM Mini Extreme/Mini Extreme ISO
- 2** Miscellaneous
- 3** Charger
- 4** Blackmagic ATEM Streaming Bridge
- 5** Angelbird SSD2GO
- 6** HDMI cables/Miscellaneous



TECHNICAL FEATURES

Dimension:

internal dimension
449,8x322,9x174,9(mm) - 17.71x12.71x6.89(in)
external dimension
478,1x389,4x194(mm) - 18.82x15.33x7.64(in)

Weight:


empty: 3,08kg - 6.79lbs
with cubed foam: 3,71kg - 8.18lbs

Temperature rating:

Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

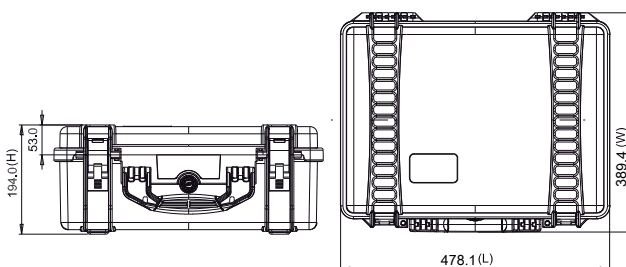

HPRC2710 for Blackmagic Atem 1 M/E

ADV1-2710-01



1 Blackmagic Design Atem 1 M/E Advanced Panel

TECHNICAL FEATURES


Dimension:
internal dimension
555x459x256(mm) - 21.85x18.07x10.08(in)
external dimension
617x525x280(mm) - 24.29x20.67x11.02(in)

Weight:
empty: 6,43 kg - 14.18 lbs
with foam: 7,45 kg - 16.42 lbs

Temperature rating:
Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

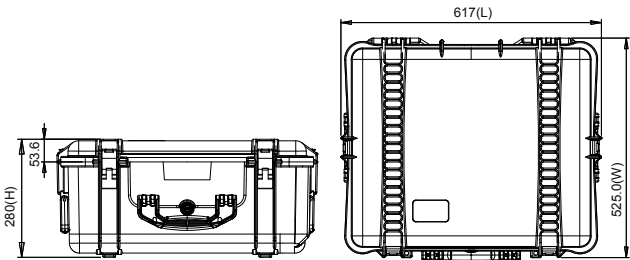

HPRC2730W for Blackmagic Ursa Mini Pro/Broadcast

URS2730W-03



- 1 BlackMagic Ursa Mini Pro / Broadcast with shoulder pad and top handle mounted
- 2 Tripod Plate
- 3 Shoulder Mount kit - Rods clamps
- 4 Batteries
- 5 Lens
- 6 Accessories / Cables
- 7 HPRC1100 Memory card holder for CFast/SDHC cards
- 8 Charger standard and Charger SWIT S-3802S



TECHNICAL FEATURES

Dimension:

internal dimension
503x459x316(mm) - 19.80x18.07x12.44(in)
external dimension
616,9x531x349,6(mm) - 24.29x20.91x13.76(in)

Weight:


empty: 8,41kg - 18.54lbs
with cubed foam: 10,43kg - 22.99lbs

Temperature rating:

Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

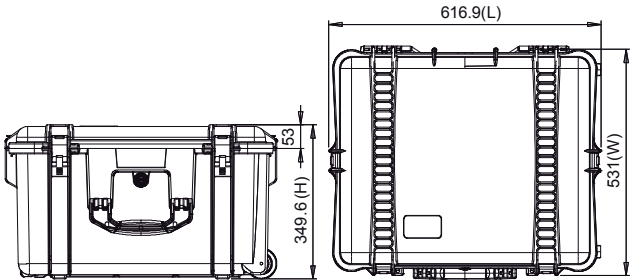





SONY

READY MADE SOLUTIONS – 2022

HPRC2460 for Sony Alpha 7 ALP2460-01



HPRC2460 for ALPHA 7 is a special edition, designed to safely carry your SONY Alpha Series.



- 1** Sony A7/A7R/A7S/A7II/A7RII/A7SII / A7SIII / a6300/ Alpha 1 with or without professional cage and lenses mounted (EF/F/PL-Mount/Leica R)
- 2** Lenses: Sony FE 50/1.4, 50/2,8 Macro, 24-70/2.8 G, 85/1,4 G, 16-35/4, 24-70/4, 28-70/3.5-5.6, 28/2.0 - SONY ZA 35/2.8, 35/1.4, 50/1.4, 50/1,8 55/1.8/ 10-18/4 - Zeiss Loxia 21/2.8, 35/2.0, 50/2.0
- 3** Battery chargers, cables
- 4** Accessories (baseplate, rods, top grip handles, lockports, cables, batteries, controllers, GoPro)
- 5** external recorder Atomos/Sound Device etc




TECHNICAL FEATURES

Dimension:
 internal dimension
 409x306x175(mm) - 16.1x12.05x6.89(in)
 external dimension
 435x377,8x193(mm) - 17.13x14.87x7.60(in)

Weight:
 empty: 2,57kg - 5.65lbs
 with cubed foam: 2,97kg - 6.55lbs

Temperature rating:
 Minimum Maximum
 -40°C -40°F +80°C +176°F

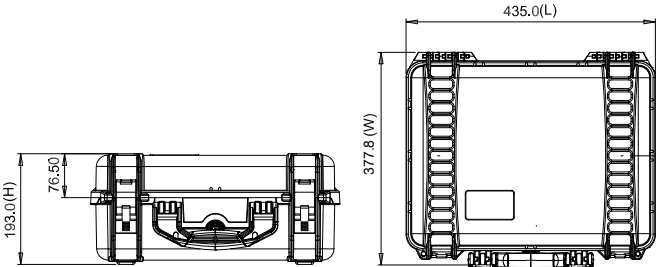

HPRC2400 for Sony FX3 FX3-2400-01



- 1 Sony FX3
- 2 Lenses: Diameter Max 90mm × Length Max 220mm
- 3 XLR Handle Unit
- 4 Battery Charger BC-QZ1
- 5 Battery NP-FZ100
- 6 Cable



HPRC SONY FX3

TECHNICAL FEATURES


Dimension:
 Internal dimension
 377x263,9x150,8(mm) - 14.84x10.39x5.94(in)
 External dimension
 402x330,5x169,2(mm) - 15.83x13.01x6.66(in)

Weight:
 empty: 2,49kg - 5.48lbs
 with cubed foam: 3,20kg - 7.04lbs

Temperature rating:
 Minimum Maximum
 -40°C -40°F +80°C +176°F




TECHNICAL DRAWING

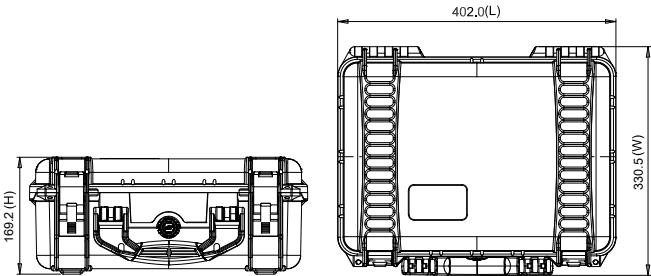

HPRC2550W for Sony ILME-FX6 FX6-2550W-01

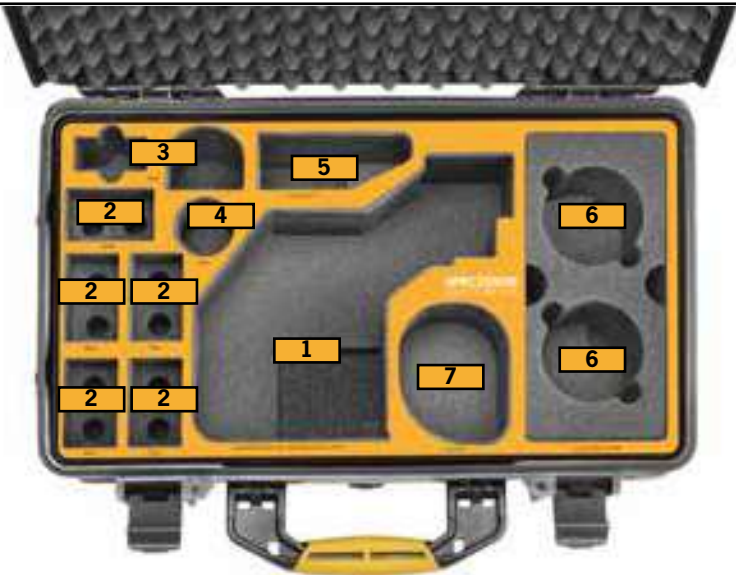

1

2

3

4

5

6

7

1 Sony ILME-FX6 Cinema Line + Smart Handle

2 BP-U35 or BP-U100 Battery

3 Charger

4 Cables

5 LCD Monitor 3,5"

6 2x Lenses GM or x Tele GM

7 Smart Grip





TECHNICAL FEATURES

Dimension:
 internal dimension
 513x288x200(mm) - 20.19x11.34x7.87(in)
 external dimension
 549x346x236(mm) - 21.61x13.62x9.29(in)

Weight:
 empty: 4,35kg - 9.57lbs
 with foam: 5,04kg - 11.10 lbs

Temperature rating:
 Minimum Maximum
 -40°C -40°F +80°C +176°F

TECHNICAL DRAWING

HPRC SONY ILME-FX6

63

HPRC2700W for Sony PXW-FX9 FX9-2700W-01



SONY
 PXW-FX9



- 1 Sony Camcorder
- 2 Viewfinder LCD
- 3 External Microphone
- 4 Battery Sony BP-U Series
- 5 Lens Adapter Metabones
- 6 Sony XQD/SD Card
- 7 Canon CNE Prime Lens
- 8 Cine Lenses up to 105mm Ø
- 9 Photo Lenses up to 105mm Ø
- 10 Hand Grip
- 11 Cable
- 12 Charger
- 13 HPRC1100 MEMBLB



TECHNICAL FEATURES


Dimension:
 Internal dimension
 554,7x458,7x246(mm) - 21.84x18.06x9.69(in)
 External dimension
 617,5x527,3x279,6(mm) - 24.31x20.76x11.0(in)

Weight:
 empty: 7,75kg - 17.09lbs
 with cubed foam: 9,07kg - 19.99lbs

Temperature rating:
 Minimum Maximum
 -40°C -40°F +80°C +176°F



TECHNICAL DRAWING

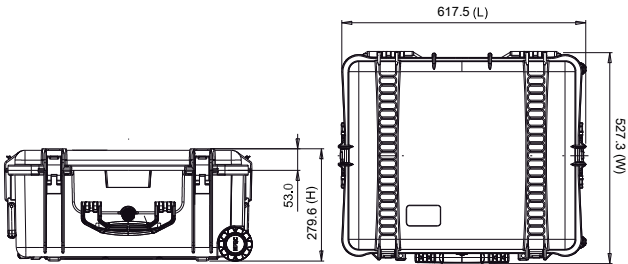

HPRC2730W for Sony Venice VEN2730W-01



- 1 Sony Venice With Axs-R7 Mounted
- 2 Axs Memory And Sxs Memory Axs-Ar1
- 3 Lanparte Universal Grip Ug-02
- 4 Accessories/Air Evf Mount
- 5 Miscellaneous
- 6 Power Supply V-Lock Pc2l
- 7 Battery V-Lock B100usb/B230usb
- 8 Viewfinder Dvf-EI200
- 9 Hprc1300 Sxs
- 10 Shoulder Mount Accessory Vct-Fsa5
- 11 Tripod Place
- 12 Shoulder Mount Rods



TECHNICAL FEATURES


Dimension:
 internal dimension
 503x459x316(mm) - 19.80x18.07x12.44(in)
 external dimension
 616,9x531x349,6(mm) - 24.29x20.91x13.76(in)

Weight:
 empty: 8,39kg - 18.49lbs
 with cubed foam: 10,19kg - 22.47lbs

Temperature rating:
 Minimum Maximum
 -40°C -40°F +80°C +176°F



TECHNICAL DRAWING

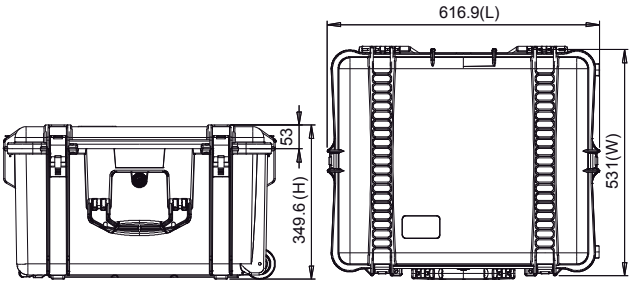

HPRC2600W for Sony PXW-Z280

Z280-2600W-01



- 1 Sony Camcorder PXW-Z280
- 2 Cables/Accessories/Miscellaneous
- 3 Battery Sony BPU – U60
- 4 Compact 4K Wide Conversion
- 5 Microphone



TECHNICAL FEATURES


Dimension:
 Internal dimension
 482,4x358,3x217,6(mm) - 18.99x14.1x8.57(in)
 External dimension
 546,9x426,8x250,7(mm) - 21.53x16.8x9.87(in)

Weight:
 empty: 6,05kg - 13.34lbs
 with cubed foam: 6,97kg - 15.37lbs

Temperature rating:
 Minimum
 -40°C -40°F
 Maximum
 +80°C +176°F



TECHNICAL DRAWING

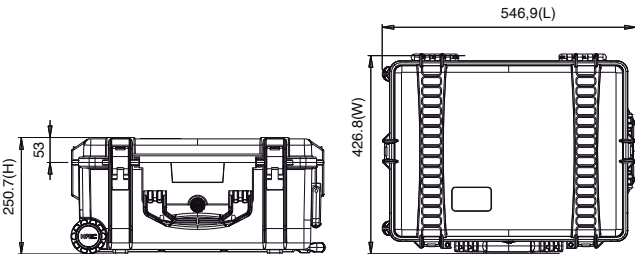

HPRC2700W for Sony PXW-Z190V Z190-2700W-01



SONY
 PXWZ190V



- 1 Sony Camcorder PXW-Z190VC
- 2 BC-U1 battery charger
- 3 Battery Sony BPU \Swit S-8U63
- 4 Microphone
- 5 Wireless Audio Set Sony UWP-D11/K51PRO
- 6 Cables/Accessories/Miscellaneous




TECHNICAL FEATURES

Dimension:
 Internal dimension
 554,7x458,7x246(mm) - 21.84x18.06x9.69(in)
 External dimension
 617,5x527,3x279,6(mm) - 24.31x20.76x11.0(in)
Weight:
 empty: 7,75kg - 17.09lbs
 with cubed foam: 9,07kg - 19.99lbs
Temperature rating:
 Minimum Maximum
 -40°C -40°F +80°C +176°F



TECHNICAL DRAWING

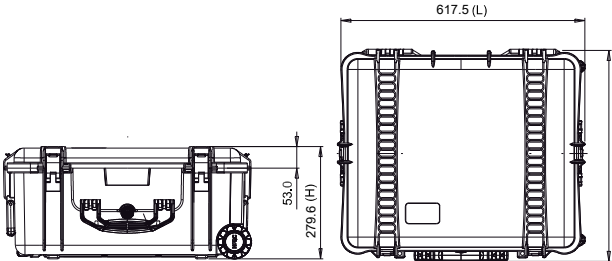

HPRC SONY PXWZ190V

HPRC2730W for Sony PXW-ZFS7 FS7-2730W-01



- 1 Sony PXW-ZFS7
- 2 Viewfinder
- 3 Sony PXW-FS7 FS7 Grip
- 4 HPRC1300 MEMBLB
- 5 VCT-FS7 Lightweight Rod Support System
- 6 19mm Quick Release
- 7 Miscellaneous
- 8 Rods 9/15/19 mm
- 9 Genlock XDCA-FS7
- 10 Charger
- 11 Battery
- 12 Monitor
- 13 Lens 100mm
- 14 Lens 24/70mm
- 15 Box for Metabones PL – E mount T
- 16 Box for Metabones Canon EF Lens to Sony E - mount T



TECHNICAL FEATURES


Dimension:
 internal dimension
 503x459x316(mm) - 19.80x18.07x12.44(in)
 external dimension
 616,9x531x349,6(mm) - 24.29x20.91x13.76(in)

Weight:
 empty: 8,41kg - 18.54lbs
 with cubed foam: 10,43kg - 22.99lbs

Temperature rating:
 Minimum Maximum
 -40°C -40°F +80°C +176°F



TECHNICAL DRAWING

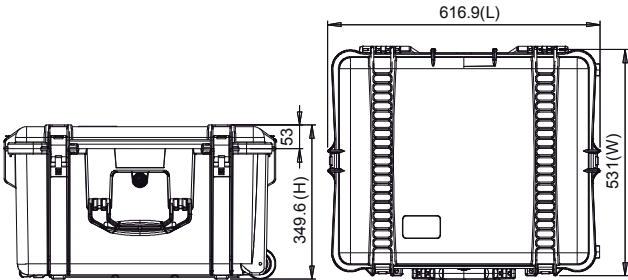





CANON

READY MADE SOLUTIONS – 2022

HPRC2300 for Canon Eos R5 / R6

CR5-2300-01



- 1 Canon EOS R5 / R6 Mirrorless Digital Camera (with or without professional cage)
- 2 Lenses: Diameter Max 90mm x Length Max 220mm
- 3 Cable/Miscellaneous
- 4 LC-E6 Charger for LP-E6 Battery Pack
- 5 LP-E6NH Lithium-Ion Battery (7.2V, 2130mAh)



TECHNICAL FEATURES


Dimension:
Internal dimension
305,7x232,4x137,5(mm) - 12.04x9.15x5.41(in)
External dimension
334,6x303x155,2(mm) - 13.17x11.93x6.11(in)

Weight:
empty: 1,75kg - 3.86lbs
with cubed foam: 1,90kg - 4.19lbs

Temperature rating:
Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

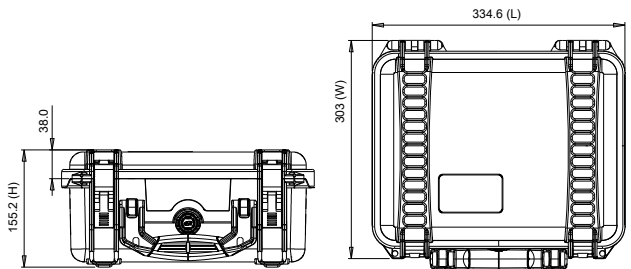

HPRC2700W for CANON EOS C300 MARK III C300-2700W-01



- 1 EOS C300 Mark III Body
- 2 Lens CN-E18-80
- 3 Lens 110/90 mm diameter, depth 180mm
- 4 Monitor
- 5 Handle
- 6 Charger
- 7 Various/Cable
- 8 Battery BP-A30/BP-A60
- 9 Charger
- 10 HPRC1100MEM



TECHNICAL FEATURES


Dimension:
 Internal dimension
 554,7x458,7x246(mm) - 21.84x18.06x9.69(in)
 External dimension
 617,5x527,3x279,6(mm) - 24.31x20.76x11.0(in)

Weight:
 empty: 7,75kg - 17.09lbs

Temperature rating:
 Minimum Maximum
 -40°C -40°F +80°C +176°F



TECHNICAL DRAWING

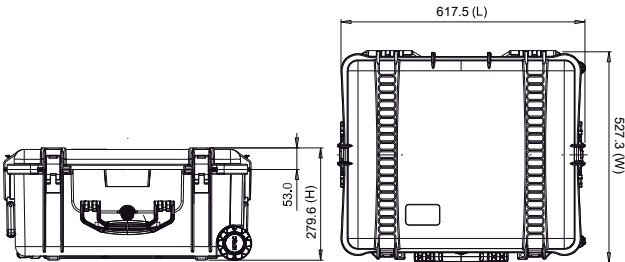

HPRC2600 for Canon Eos C70

C70-2600-01



- 1 Canon Eos C70
- 2 Batteries BP-A60/BP-A30
- 3 Lens Canon RF 24-105 or similar
- 4 Lens Canon RF 15-35 or similar
- 5 Lens Canon RF 70-200 or similar
- 6 Lens Canon RF 24-70 or similar
- 7 Canon Adapter EF-RF 0.71x
- 8 HPRC1300MEMBLB
- 9 CA-CP200L
- 10 Miscellaneous
- 11 Battery Charger CG-A20 OTH
- 12 Handle unit



HPRC CANON EOS C70

TECHNICAL FEATURES


Dimension:
internal dimension
482,4x358,3x198,1(mm) - 18.99x14.1x7.8(in)
external dimension
543,4x426,8x218,1(mm) - 21.39x16.8x8.59(in)

Weight:
empty: 4,25kg - 9.37lbs
with cubed foam: 5,05kg - 11.13lbs

Temperature rating:
Minimum -40°C -40°F
Maximum +80°C +176°F



TECHNICAL DRAWING

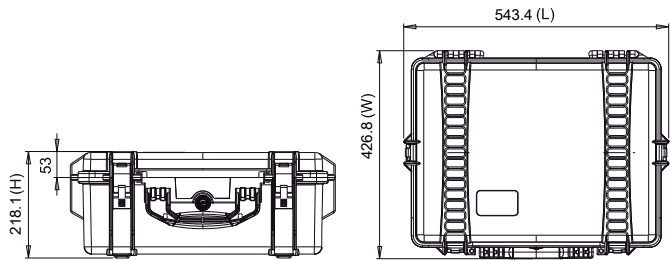

HPRC2600 for Canon Eos C200 C200-2600-01



- 1 Canon Eos C200 With Camera Grip Mounted
- 2 Handle Unit Hdu-2
- 3 Monitor Lcd Lm-V1, Lcd La-V1
- 4 Compact Power Adaptor Ca-A10
- 5 Compact Adaptor Cp200b
- 6 Lenses Ef85mm/16-35/24-70/24-105Mm
- 7 HPRC1100MEM
- 8 Battery Pack A30/A60
- 9 Battery Charger A-20
- 10 Miscellaneous Accessories
- 11 Screw
- 12 Allen Key



TECHNICAL FEATURES


Dimension:
 internal dimension
 482,4x358,3x198,1(mm) - 18.99x14.1x7.8(in)
 external dimension
 543,4x426,8x218,1(mm) - 21.39x16.8x8.59(in)

Weight:
 empty: 4,31kg - 9.50lbs
 with cubed foam: 4,84kg - 10.663lbs

Temperature rating:
 Minimum Maximum
 -40°C -40°F +80°C +176°F



TECHNICAL DRAWING

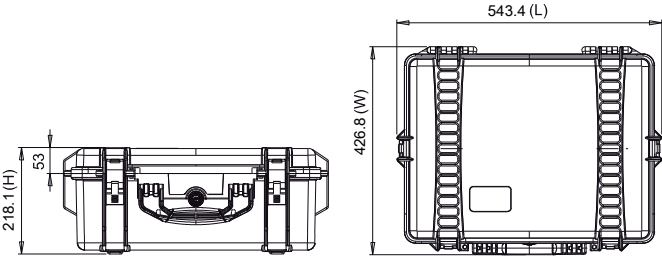

HPRC2600 for Canon Eos C100 C100-2600-01



- 1 Canon Eos C100 With Viewfinder and Camera Grip Mounted
- 2 Handle Unit
- 3 Lenses Ef85mm/16-35/24-70/24-105Mm
- 4 Battery Pack Bp 955
- 5 Battery Pack Bp 975
- 6 Battery Charger Cg-940
- 7 Compact Adaptor Ca-941
- 8 Miscellaneous Accessories
- 9 HPRC1100MEM



TECHNICAL FEATURES


Dimension:
 internal dimension
 482,4x358,3x198,1(mm) - 18.99x14.1x7.8(in)
 external dimension
 543,4x426,8x218,1(mm) - 21.39x16.8x8.59(in)

Weight:
 empty: 4,25kg - 9.37lbs
 with cubed foam: 5,05kg - 11.13lbs

Temperature rating:
 Minimum Maximum
 -40°C -40°F +80°C +176°F



TECHNICAL DRAWING

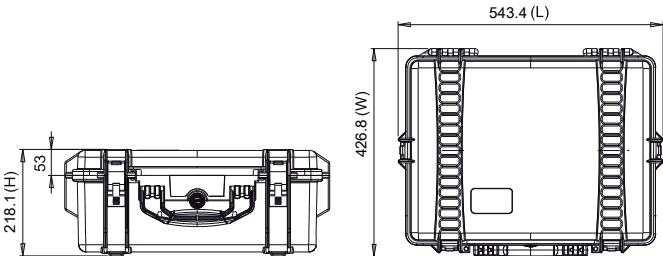



MATTEBOX

READY MADE SOLUTIONS – 2022

HPRC2600 for Tilta MB-T12 Mattebox T12MB-2600-01



- 1 Carbon fiber body with 15mm LWS attached
- 2 Top French flag
- 3 Step-down rings
- 4 Hard Mattes (16-20mm, 24-28mm, 32-35mm, 50-85mm, 85-180mm)
- 5 Miscellaneous
- 6 Miscellaneous



TECHNICAL FEATURES


Dimension:
 internal dimension
 482,4x358,3x198,1(mm) - 18.99x14.1x7.8(in)
 external dimension
 543,4x426,8x218,1(mm) - 21.39x16.8x8.59(in)

Weight:
 empty: 4,31kg - 9.50lbs
 with cubed foam: 5,03kg - 11.09lbs

Temperature rating:
 Minimum Maximum
 -40°C -40°F +80°C +176°F



TECHNICAL DRAWING

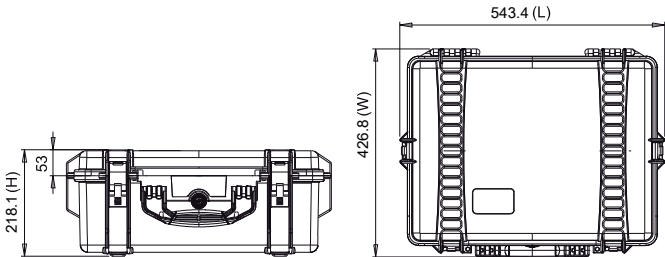

HPRC TILTA MB-T12 MATTEBOX




MOZA

READY MADE SOLUTIONS – 2022

HPRC2530 for Moza Air2 Ifocus

MAIR2-2530-01

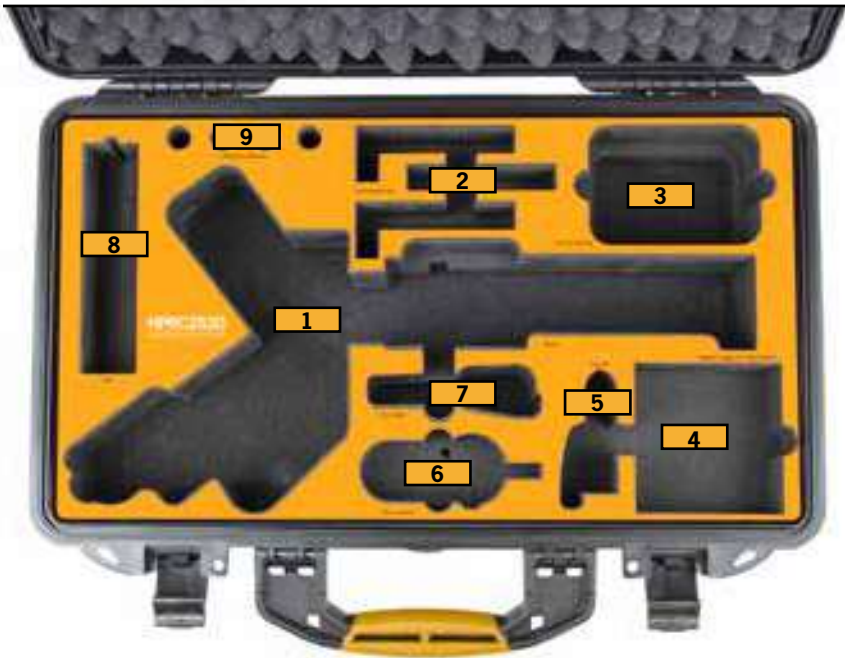

- 1 Gimbal
- 2 Quick Release Plate
- 3 Cable storage bag
- 4 Intelligent Charger and 18650 batteries
- 5 Ifocus M
- 6 Ifocus Handunit
- 7 Ifocus Motor
- 8 Tripod
- 9 Follow focus install pipe




TECHNICAL FEATURES

Dimension:
internal dimension 513x288x132(mm) - 20.20x11.34x5.20(in)
external dimension 540x350x153(mm) - 21.26x13.78x6.02(in)

Weight:
empty: 3,20kg - 7.05lbs
with cubed foam: 3,26kg - 7.19lbs

Temperature rating:
Minimum -40°C -40°F
Maximum +80°C +176°F

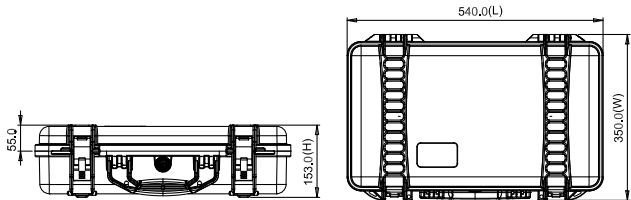



ZHIYUN CRANE

READY MADE SOLUTIONS - 2022

HPRC2600W for ZHIYUN Crane 3 Lab

CR3-2600W-01



- 1 Crane 3 Lab Stabilizer
- 2 TransMount Handheld Tripod
- 3 Battery Charger
- 4 Batteries 18650
- 5 Cable Storage Case
- 6 Quick Release Plate
- 7 TransMount Phone Holder



HPRC ZHIYUN CRANE 3 LAB

TECHNICAL FEATURES


Dimension:
Internal dimension
482,4x358,3x217,6(mm) - 18.99x14.1x8.57(in)
External dimension
546,9x426,8x250,7(mm) - 21.53x16.8x9.87(in)

Weight:
empty: 6,05kg - 13.34lbs
with cubed foam: 6,97kg - 15.37lbs

Temperature rating:
Minimum
-40°C -40°F
Maximum
+80°C +176°F



TECHNICAL DRAWING

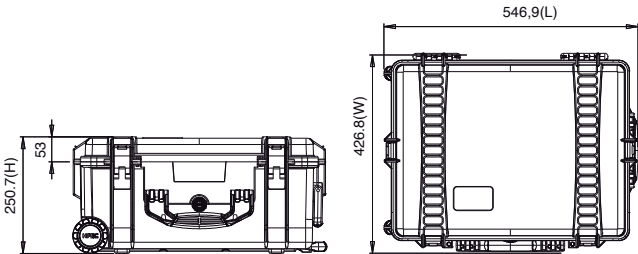

HPRC2700W for ZHIYUN Crane 3 Lab Master package

CR3-2700W-01



- 1 Crane 3 Lab Stabilizer
- 2 Handheld Tripod
- 3 Battery Charger
- 4 Cable Storage Case
- 5 Quick Setup Kits
- 6 Telescopic Monopod with Locking Buckle and Multifunctional Camera Belt
- 7 Phone Holder with Crown Gear
- 8 Miscellaneous
- 9 Batteries 18650
- 10 Focus and Zoom Combo Kits
- 11 Cable
- 12 Quick Release Base Plate
- 13 Quick Release Plate
- 14 HPRC1100 (not included)



TECHNICAL FEATURES


Dimension:
Internal dimension
554,7x458,7x246(mm) - 21.84x18.06x9.69(in)
External dimension
617,5x527,3x279,6(mm) - 24.31x20.76x11.0(in)

Weight:
empty: 7,74kg - 17.06lbs
with cubed foam: 8,84kg - 19.49lbs

Temperature rating:
Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

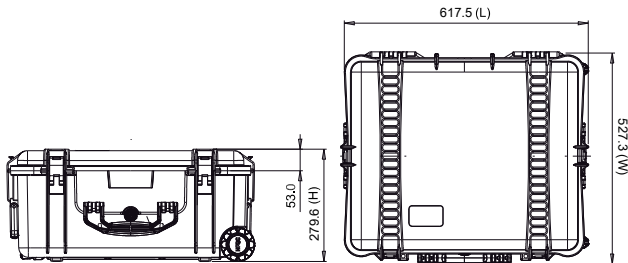





Z CAM

READY MADE SOLUTIONS – 2022

HPRC2400 for Z CAM E2-F6 Full Frame 6K Cinema Camera ZE2F6-2400-01



- 1 Z CAM E2-F6 Full Frame 6K Cinema Camera with SmallRig Cage mounted
- 2 Alternative Lens Mount
- 3 Accessories
- 4 Charger
- 5 Cable
- 6 NF-P Battery
- 7 CFast 2.0
- 8 WiFi Antenna



TECHNICAL FEATURES


Dimension:
 Internal dimension
 377x263,9x150,8(mm) - 14.84x10.39x5.94(in)
 External dimension
 402X330,5X169,2(mm) - 15.83x13.01x6.66(in)

Weight:
 empty: 2,23kg - 4.91lbs
 with cubed foam: 2,49kg - 5.49lbs

Temperature rating:
 Minimum Maximum
 -40°C -40°F +80°C +176°F



TECHNICAL DRAWING

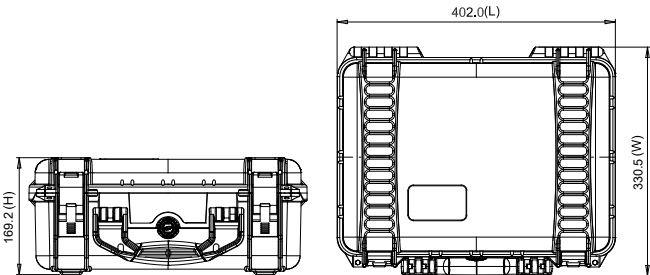


HPRC Z CAM E2-F6



CHASING-INNOVATION

READY MADE SOLUTIONS – 2022

HPRC2710 for Chasing Innovation Gladius Mini Rev. 2
GLA2710-02

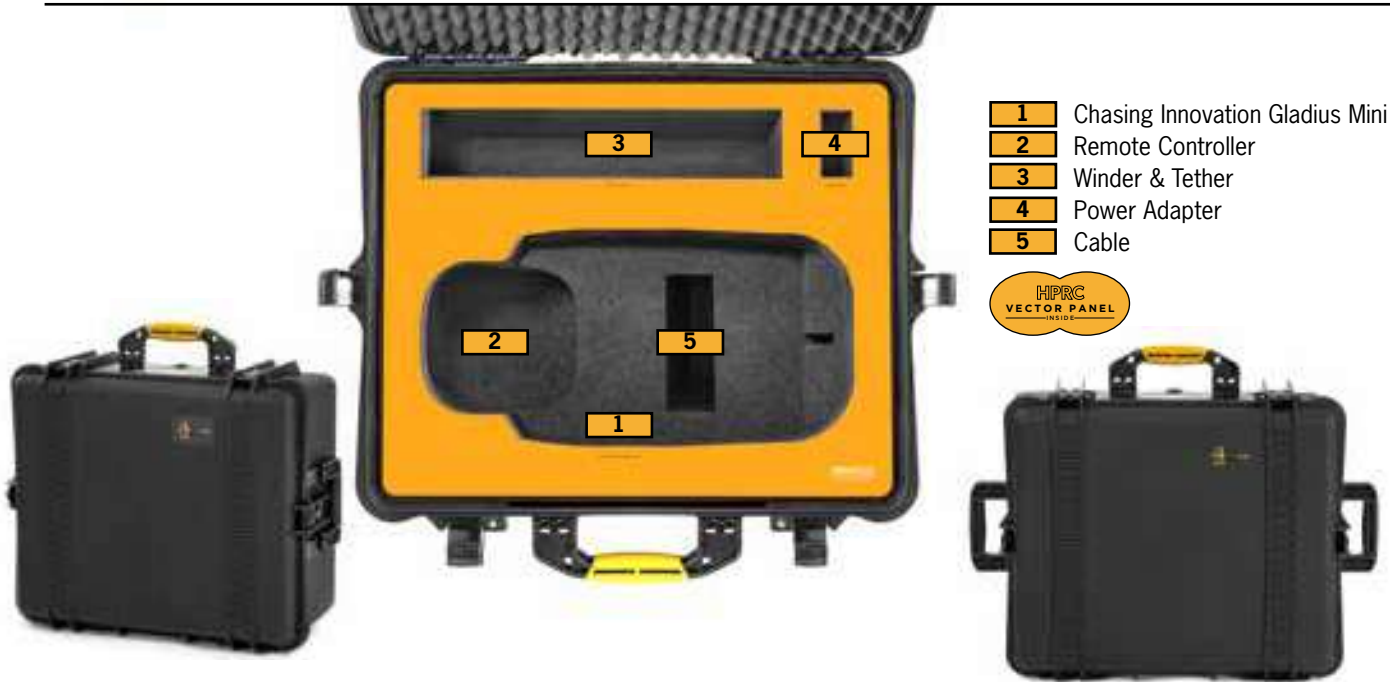

- 1 Chasing Innovation Gladius Mini
- 2 Remote Controller
- 3 Winder & Tether
- 4 Power Adapter
- 5 Cable



HPRC GLADIUS MINI

TECHNICAL FEATURES

Dimension:

Internal dimension
555x459x256(mm) - 21.85x18.07x10.08(in)
External dimension
617x525x280(mm) - 24.29x20.67x11.02(in)

Weight:


empty: 6,71kg - 14.76lbs

Temperature rating:

Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

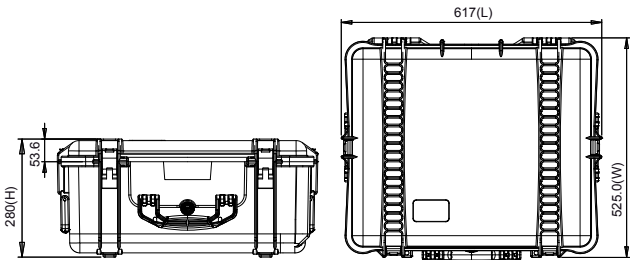

HPRC2710 for Chasing M2 Rov M2R-2710-01



- 1 Drone
- 2 O-rings
- 3 Winder & Tether
- 4 Power Cord & 3 in 1 Charger
- 5 Towel
- 6 Remote Controller
- 7 Battery



HPRC CHASING M2 ROV

TECHNICAL FEATURES


Dimension:
 Internal dimension
 555x459x256(mm) - 21.85x18.07x10.08(in)
 External dimension
 617x525x280(mm) - 24.29x20.67x11.02(in)

Weight:
 empty: 6,71kg - 14.76lbs

Temperature rating:
 Minimum Maximum
 -40°C -40°F +80°C +176°F



TECHNICAL DRAWING

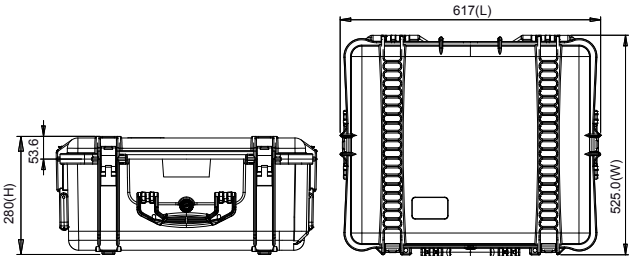






QYSEA

READY MADE SOLUTIONS – 2022



HPRC2760W for Qysea Fifiish V6S

FIV6S-2760W-01

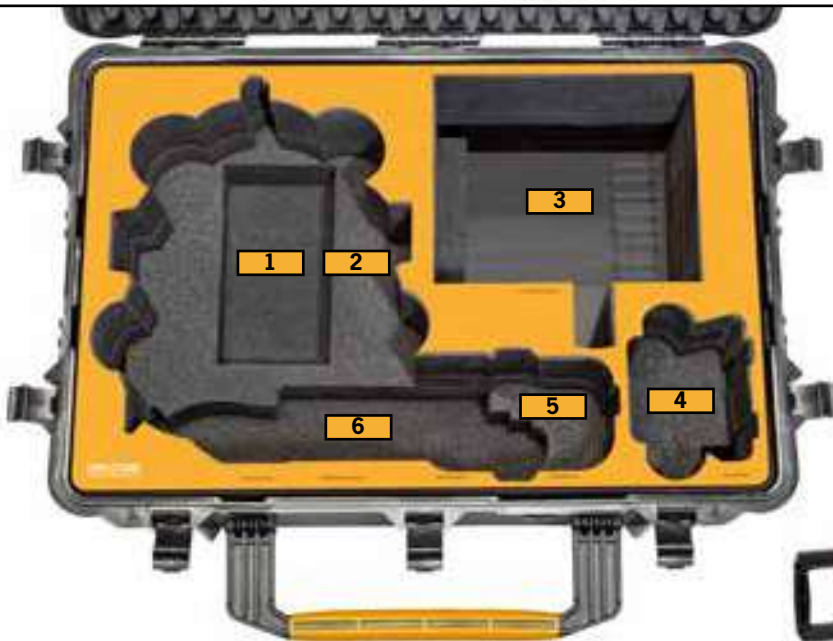

- 1 Charger/Miscellaneous
- 2 FIFISH V6s Underwater Robot
- 3 100/200M Tether With Reel
- 4 Remote Controller
- 5 VR headtracking box
- 6 100N Clamping force



TECHNICAL FEATURES

Dimension:

Internal dimension
690x450x301(mm) - 27.16x17.72x11.85(in)
External dimension
750x511x329(mm) - 29.53x20.12x12.95(in)

Weight:


empty: 9,03kg - 19.91lbs
with cubed foam: 10,14kg - 22.35lbs

Temperature rating:

Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

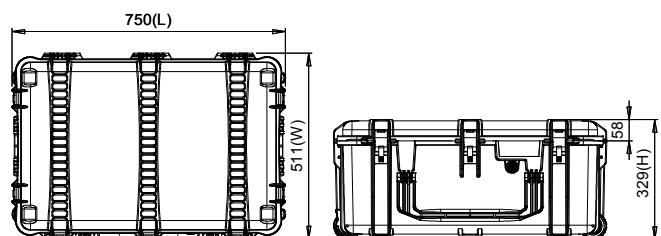



FUJIFILM



READY MADE SOLUTIONS – 2022

HPRC2500 for Fujifilm GFX100 GFX100-2500-01



- 1 Fujifilm GFX100
- 2 Cable storage/Miscellaneous
- 3 Adjustable lens: FUJIFILM GF 110mm f/2 R LM WR Lens, 23mm f/4 R LM WR Lens, 45mm f/2.8 R WR Lens, 32-64mm f/4 R LM WR Lens
- 4 Battery charger
- 5 Battery NP-T125
- 6 Ac Power Adapter





HPRC FUJIFILM GFX100

TECHNICAL FEATURES

Dimension:
 internal dimension
 449,8x322,9x174,9(mm) - 17.71x12.71x6.89(in)
 external dimension
 478,1x389,4x194(mm) - 18.82x15.33x7.64(in)

Weight:
 empty: 3,22kg - 7.10lbs
 with cubed foam: 3,75kg - 8.27lbs

Temperature rating:
 Minimum Maximum
 -40°C -40°F +80°C +176°F





RED

READY MADE SOLUTIONS – 2022

HPRC2730W for Red Ranger Gemini RGE-2730W-01



- 1 Camera with Top Handle
- 2 HPRC1300 MEVBLB
- 3 Right Side Wooden Handle 2.0 with R/S Button - Tilta
- 4 Red Mini Mag
- 5 Cable
- 6 Red Bomb EVF DSMC
- 7 Titan Support Arm with Single 1/4" QR Bracket – Monitor Side
- 8 GDU 98Wh Mini V-Lock Battery
- 9 Cable
- 10 BlueShape Travel Charger
- 11 Red Ranger Ac Power Adaptor
- 12 DSMC2 Red Touch 7.0" LCD
- 13 Smallrig for monitor LCD EVF Mount/BMVA/SmallHD, Zacuto Gratical HD1938
- 14 Smallrig Rosette Arm Handle for Shoulder Stabilizer
- 15 Quick Release Platform



HPRC RED RANGER GEMINI

TECHNICAL FEATURES


Dimension:
 internal dimension
 503x459x316(mm) - 19.80x18.07x12.44(in)
 external dimension
 616,9x531x349,6(mm) - 24.29x20.91x13.76(in)

Weight:
 empty: 8,41kg - 18.54lbs
 with cubed foam: 10,43kg - 22.99lbs

Temperature rating:
 Minimum Maximum
 -40°C -40°F +80°C +176°F



TECHNICAL DRAWING

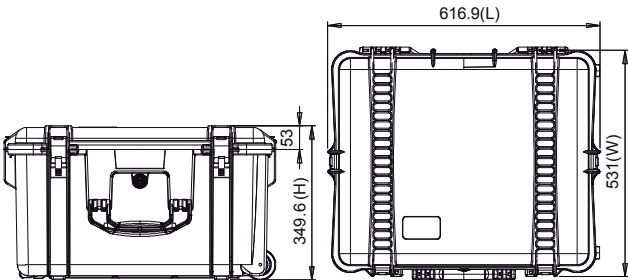



NIKON

READY MADE SOLUTIONS – 2022

HPRC2460 for Nikon D850

D850-2460-01



for **NIKON D850**



- 1 D850 Camera Body
- 2 Additional EN-EL15a Rechargeable Li-ion Battery
- 3 ME-W1 Wireless Microphone
- 4 ME-1 Stereo Microphone
- 5 Atomos Ninja Flame
- 6 Lenses: AF-S NIKKOR 35mm f/1,8G ED / AF-S NIKKOR 85mm f/1.8G / AF-S NIKKOR 20mm f/1,8G ED
- 7 MH-25A Battery Charger/ UC-E22 USB Cable / Coiled HDMI Cable


HPRC NIKON D850

TECHNICAL FEATURES

Dimension:
internal dimension
409x306x175(mm) - 16.1x12.05x6.89(in)
external dimension
435x377,8x193(mm) - 17.13x14.87x7.60(in)

Weight:
empty: 2,55kg - 5.62lbs
with cubed foam: 3,14kg - 6.92lbs

Temperature rating:
Minimum Maximum
-40°C -40°F +80°C +176°F

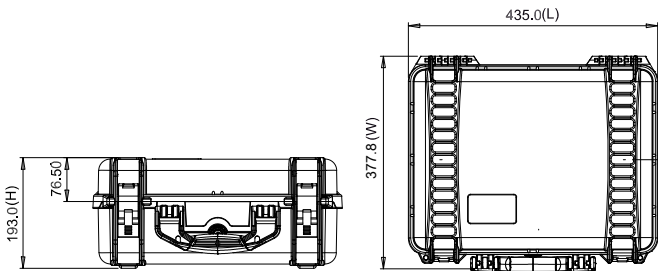



PANASONIC

READY MADE SOLUTIONS – 2022

HPRC2460 for Panasonic GH5 GH52460-01



HPRC2460 for PANASONIC GH5 is a special edition,
 designed to safely carry your GH5 Lumix G Series.




- 1** PANASONIC GH5 with or without professional cage and lenses mounted
- 2** Lenses: lumix g 8mm f3,5 (fisheye) hd, lumix dg summilux 12 f1.4, lumix g pancake 14mm f2.5, leica dg summilux 15mm / f1,7 asph, lumix g 20mm f1,7 (asph), leica dg summilux 25mm f1,4 (asph), lumix g 25mm f1.7 asph., lumix g 30mm macro f2,8, leica dg nocticron 42,5 mm f 1,2 (asph) hd, lumix g dg 1,7 / 42,5mm asph/power o.i.s., leica dg macro-elmarit 45mm f2,8 (asph), lumix g vario 7-14mm f4,0 (asph) hd, leica dg vario elmarit 8-18, lumix g vario 12-32mm f3.5-f5.6 (asph) hd, lumix g x vario 12-35mm f2,8 (asph) hd, lumix g x vario 12-35 ii, leica dg vario elmarit 12-60, lumix g vario 12-60, lumix g vario 14-42mm f3,5-5,6 (asph) hd, lumix g vario 14-42mm f3,5-5,6 (asph) hd, lumix g x vario pz 14-42mm f3,5-5,6 (asph), lumix g vario 14-42mm f3,5-5,6 (asph) hd, lumix g x vario pz 14-42mm f3,5-5,6 (asph), lumix g vario 14-45mm f3,5-5,6 (asph) hd, lumix g x vario 35-100mm f2,8 hd, lumix g x vario 35-100 ii, lumix g vario 35-100mm f4,0-5,6, lumix g vario 45-200 ii, lumix g 12,5mm f12,5 3d
- 3** Battery chargers, cables
- 4** Accessories (baseplate, rods, top grip handles, lockports, cables, batteries, controllers, GoPro)
- 5** External recorder Atomos/Sound Device etc

TECHNICAL FEATURES

Dimension:
 internal dimension
 409x306x175(mm) - 16.1x12.05x6.89(in)
 external dimension
 435x377,8x193(mm) - 17.13x14.87x7.60(in)

Weight:
 empty: 2,55kg - 5.62lbs
 with cubed foam: 3,14kg - 6.92lbs

Temperature rating:
 Minimum Maximum
 -40°C -40°F +80°C +176°F

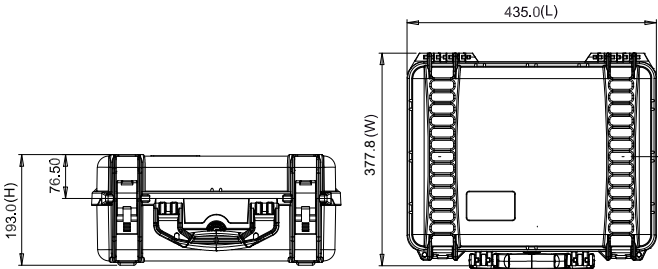



LEICA

Leica

LEICA

READY MADE SOLUTIONS - 2022

HPRC2400 for Leica M
LEM2400-01



FOR LEICA M




- 1** 1 x Leica M Camera Body with Lens Attached
- 2** Electronic Viewfinder
- 3** 4 x Lens
- 4** Charger
- 5** Spare Battery
- 6** Cables/Miscellaneous

TECHNICAL FEATURES

Dimension:
Internal dimension
377x263,9x150,8(mm) - 14,84x10,39x5,94(in)
External dimension
402X330,5X169,2(mm) - 15.83x13.01x6.66(in)

Weight:
empty: 2,38kg - 5.25lbs

Temperature rating:
Minimum Maximum
-40°C -40°F +80°C +176°F

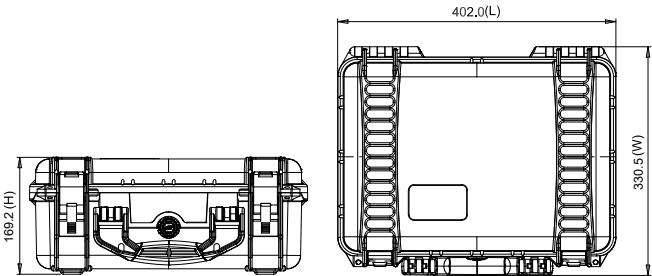

HPRC2460 for Leica M LEM2460-01



FOR LEICA M




- 1 2 x Leica M Camera Body with Lens Attached
- 2 2 x Electronic Viewfinder
- 3 2 x Spare Batteries
- 4 4 x Lens
- 5 2 x Charger
- 6 Cables/Miscellaneous

TECHNICAL FEATURES

Dimension:
 internal dimension
 409x306x175(mm) - 16.1x12.05x6.89(in)
 external dimension
 435x377,8x193(mm) - 17.13x14.87x7.60(in)

Weight:
 empty: 2,55kg - 5.62lbs
 with cubed foam: 3,14kg - 6.92lbs

Temperature rating:
 Minimum Maximum
 -40°C -40°F +80°C +176°F

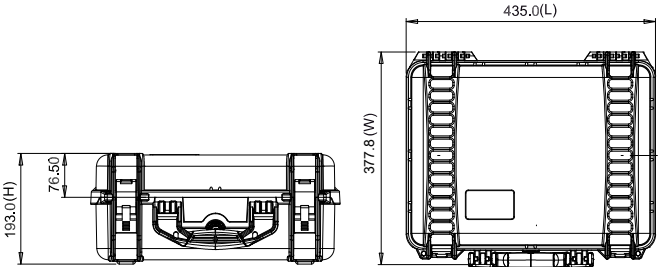





APPLE



READY MADE SOLUTIONS – 2022

HPRC4800W for Apple Mac Pro

MPRO-4800W-01



- 1 Mac Pro
- 2 Miscellaneous
- 3 Power cord
- 4 USB-C to Lightning Cable
- 5 Magic Mouse 2
- 6 Magic Keyboard



TECHNICAL FEATURES

Dimension:

internal dimension
720x320x600(mm) - 28.34x12.60x23.62(in)
external dimension
776x380x649(mm) - 30.55x14.96x25.55(in)

Weight:


empty: 10.00kg - 22.21lbs
with cubed foam: 14.10kg - 31.08lbs

Temperature rating:

Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

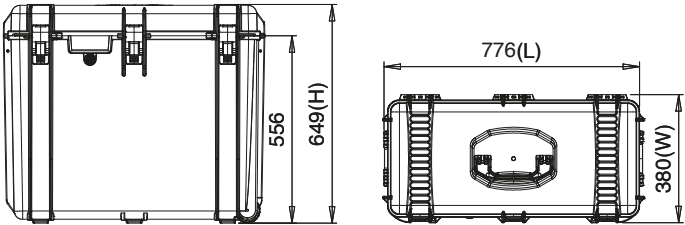



HPRC4800W for Apple Imac 27"- ImacPro

MAC4800W-01



- 1 Apple Imac 27" - ImacPro
- 2 Cable
- 3 Keyboard + Mouse

TECHNICAL FEATURES


Dimension:
internal dimension
720x320x600(mm) - 28.34x12.60x23.62(in)
external dimension
776x380x649(mm) - 30.55x14.96x25.55(in)

Weight:
empty: 10,00kg - 22.21lbs
with cubed foam: 14,10kg - 31.08lbs

Temperature rating:
Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

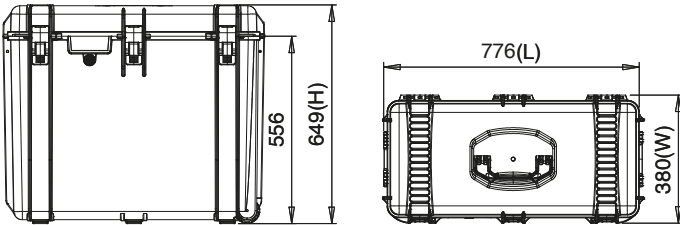

HPRC2350 for MacPro13" + accessories

MPRO-2350-01



- 1 MacBook Pro 13"
- 2 Miscellaneous



HPRC APPLE MACPRO 13"

TECHNICAL FEATURES


Dimension:
internal dimension
340x235x99(mm) - 13.39x9.25x3.90(in)
external dimension
365x293x115,5(mm) - 14.37x11.54x4.55(in)

Weight:
empty: 1.49kg - 3.29lbs
with cubed foam: 1.66kg - 3.65lbs

Temperature rating:
Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

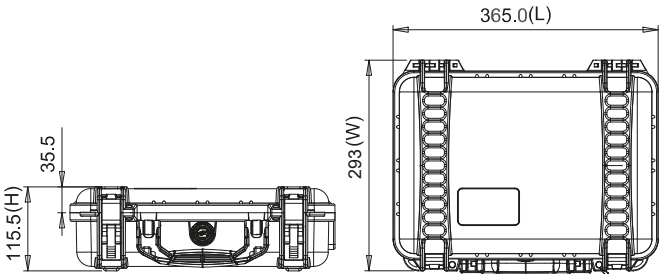

HPRC2400 for MacPro15" + accessories

MPRO-2400-01



- 1 MacBook Pro 15"
- 2 Miscellaneous



HPRC APPLE MACPRO 15"

TECHNICAL FEATURES


Dimension:
Internal dimension
377x263,9x150,8(mm) - 14.84x10.39x5.94(in)
External dimension
402X330,5X169,2(mm) - 15.83x13.01x6.66(in)

Weight:
empty: 2,38kg - 5.25lbs

Temperature rating:
Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

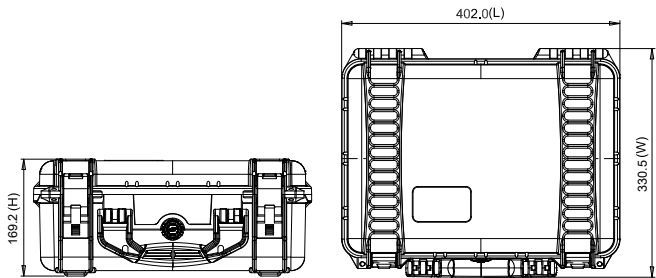

HPRC2530 for MacBook Pro 16" + accessories

MPRO-2530-01



- 1 MacBook Pro 16"
- 2 Miscellaneous



HPRC APPLE MACBOOK PRO 16"

TECHNICAL FEATURES


Dimension:
Internal dimension
513x288x132(mm) - 20.20x11.34x5.20(in)
External dimension
540x350x153(mm) - 21.26x13.78x6.02(in)

Weight:
empty: 2,84kg - 6.26lbs
with foam: 3,25kg - 7.16lbs

Temperature rating:
Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

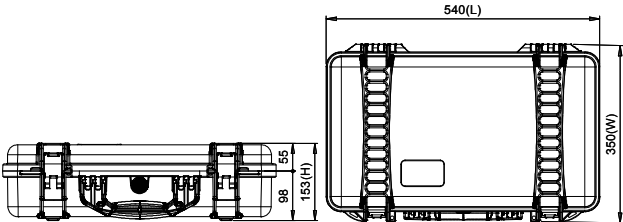






EIZO

READY MADE SOLUTIONS – 2022

HPRC4800W for EIZO 27/24"

EIZ27-4800W-01

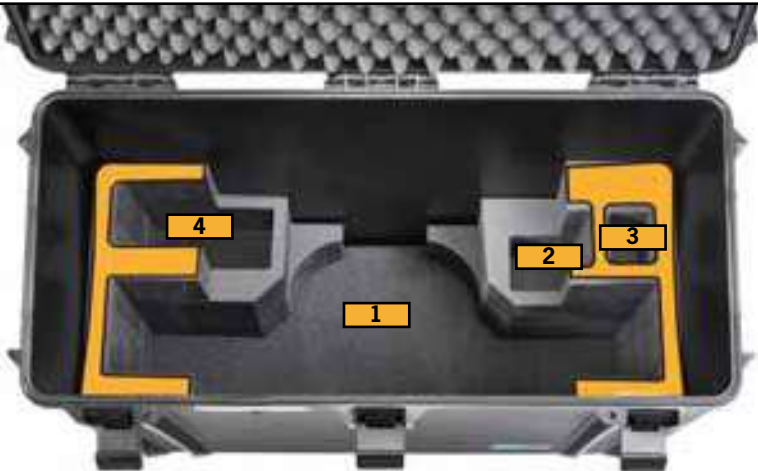

- 1
- Eizo Monitor 27" or 24"
- 2
- Cables and accessories
- 3
- Cables and accessories
- 4
- Protective hood and accessories



TECHNICAL FEATURES

Dimension:

internal dimension
720x320x600(mm) - 28.34x12.60x23.62(in)

external dimension
776x380x649(mm) - 30.55x14.96x25.55(in)

Weight:

empty: 11,12kg - 24.50lbs

with cubed foam: 12,43kg - 27.40lbs



Temperature rating:

MinimumMaximum

-40°C -40°F+80°C +176°F



TECHNICAL DRAWING



HPRC EIZO 27/24"



UNIVERSAL MICROPHONES

READY MADE SOLUTIONS – 2022

HPRC2200 for Universal Microphones

MCF3-2200-01



1 Universal Microphone



HPRC MICROPHONES

TECHNICAL FEATURES


Dimension:
internal dimension
236x182x108(mm) - 9.29x7.17x4.25(in)
external dimension
258x244,3x123,3(mm) - 10.16x9.62x4.85(in)

Weight:
empty: 0,87kg - 1.92lbs
with cubed foam: 1,08kg - 2.38lbs

Temperature rating:
Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

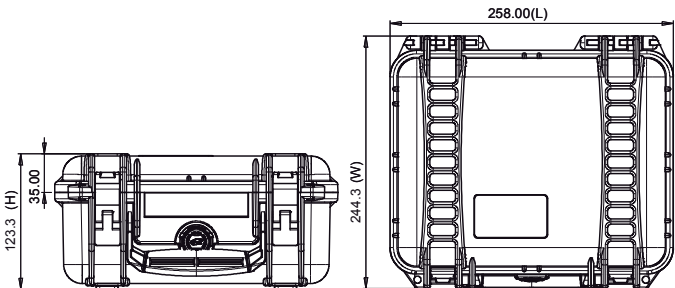

HPRC2250 for Universal Microphones

MCF6-2250-01



LEVEL 1

LEVEL 2



1 Universal Microphone



HPRC MICROPHONES

TECHNICAL FEATURES


Dimension:
internal dimension
236x182x155(mm) - 9.29x7.17x6.10(in)
external dimension
258X230X170(mm) - 10.16x9.06x6.69(in)

Weight:
empty: 1,00kg - 2.20lbs
with cubed foam: 1,35kg - 2.97lbs

Temperature rating:
Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

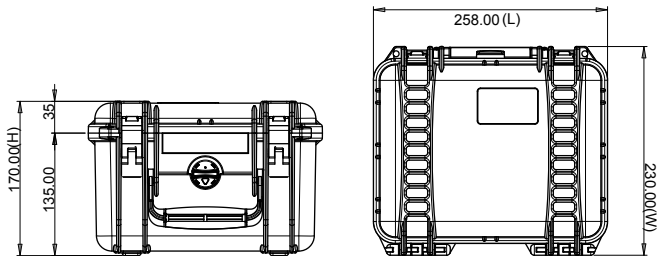




I 

BROMPTON

BROMPTON

READY MADE SOLUTIONS – 2022

HPRC4800W for Brompton BRO4800W-01

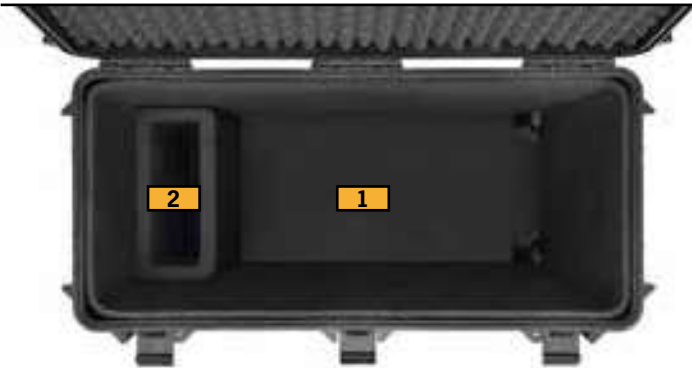

1 Brompton Bike

2 Accessories



TECHNICAL FEATURES


Dimension:
 internal dimension
 720x320x600(mm) - 28.34x12.60x23.62(in)
 external dimension
 776x380x649(mm) - 30.55x14.96x25.55(in)

Weight:
 empty: 10,00kg - 22.21lbs
 with cubed foam: 14,10kg - 31.08lbs

Temperature rating:
 Minimum
 -40°C -40°F
 Maximum
 +80°C +176°F



TECHNICAL DRAWING

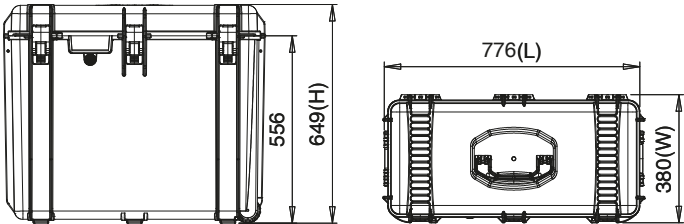



Plaber s.r.l. - HPRC cases

Via Div Tridentina, 10
I-36061 Bassano del Grappa
Vicenza - Italy

Tel +39 0424 809150

USA office and warehouse:

Plaber America Inc - HPRC cases

110 Chestnut Ridge Rd. #314
Montvale, NJ 07645

Tel +1(201) 989 3353

www.hprc.it | www.hprcusa.com

info@hprc.it

HPRC® Brand owned by:

plaber

READY MADE SOLUTIONS – 2022