

plaber®

 READY

HPRC READY MADE SOLUTIONS – 2023

We are HPRC. We don't just design and manufacture watertight hard protective cases, we supply carrying solutions. And solutions need to be no-hassle and tailored to your needs.

This is why in Autumn 2013 we designed our first case with a foam specially cut to house the DJI Phantom 1.

Now, almost 10 years later, we are a leading manufacturer of custom cases for drones, gimbals, camcorders and cameras but we feel we are still at the beginning: more is yet to come.

MADE IN ITALY

## HPRC VECTOR PANEL

The new protective layer system designed for your Ready Case



Made of special PVC based compound, the Vector Panel ensures:

- foam long-last durability and integrity;
- improved protection for the equipment;
- dedicated item slots, suitably marked, avoiding lost tools;
- easy and quick organization of the case;
- savings in space and time;
- professional design and presentation.



The system significantly increases the overall performance and efficiency of the case in any kind of environment, weather conditions and temperature.



DJI

HPRC READY MADE SOLUTIONS - 2023

# HPRC2400 for DJI Mavic 3 Pro Cine Premium Combo / Fly More Combo

## S-MAV3P-2400-01



- 1 DJI Mavic 3 Pro with Storage Cover
- 2 Battery Charging Hub / Cables
- 3 DJI RC / Pro / DJI Smart Controller
- 4 Propellers / Portable Charger
- 5 Miscellaneous
- 6 ND Filters Set
- 7 Intelligent Flight Battery



### TECHNICAL FEATURES


**Dimension:**  
Internal dimension:  
377x263,9x150,8(mm) - 14.84x10.39x5.94(in)  
External dimension:  
402x330,5x169,2(mm) - 15.83x13.01x6.66(in)

**Weight:**  
empty: 2,17kg - 4.78lbs  
with cubed foam: 2,58kg - 5.69lbs

**Temperature rating:**  
Minimum Maximum  
-40°C -40°F +80°C +176°F



### TECHNICAL DRAWING

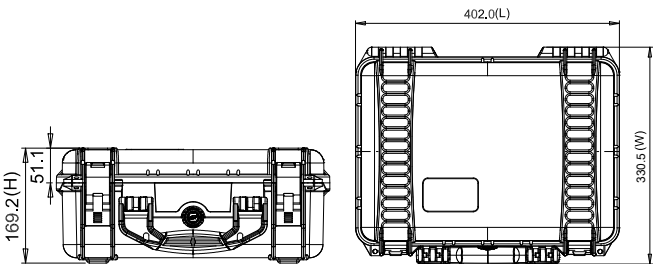

# HPRC3500 for DJI Mavic 3 Pro Cine Premium Combo / Fly More Combo **S-MAV3P-3500-01**



- 1** DJI Mavic 3 Pro with Storage Cover
- 2** Battery Charging Hub / Cables
- 3** DJI RC / Pro / DJI Smart Controller
- 4** Propellers / Portable Charger
- 5** Miscellaneous
- 6** ND Filters Set
- 7** Intelligent Flight Battery



## TECHNICAL FEATURES


**Dimension:**  
 Internal dimension:  
 433,5x319,3x168,8(mm) - 17.07x12.57x6.65(in)  
 External dimension:  
 497,9x370,3x185(mm) - 19.60x14.58x7.28(in)

**Weight:**  
 empty: 3kg - 6.61lbs  
 with cubed foam: 3,55kg - 7.82lbs

**Temperature rating:**  
 Minimum            Maximum  
 -40°C -40°F        +80°C +176°F



## TECHNICAL DRAWING

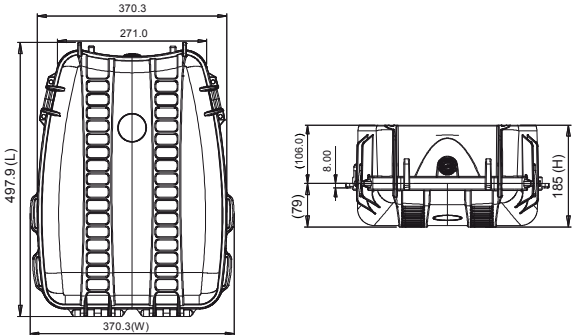

HPRC Soft bag for DJI Mavic 3 Pro Cine  
Premium Combo / Fly More Combo

S-MAV3PBAG35



- 1 DJI Mavic 3 Pro with Storage Cover
- 2 Battery Charging Hub / Cables
- 3 DJI RC / Pro / DJI Smart Controller
- 4 Propellers / Portable Charger
- 5 Miscellaneous
- 6 ND Filters Set
- 7 Intelligent Flight Battery

TECHNICAL FEATURES

**Dimension:**  
internal dimension  
433x319x169(mm) - 17.05x12.56x6.65(in)  
external dimension  
498x370x185(mm) - 19.61x14.57x7.28(in)



HPRC DJI MAVIC 3 PRO CINE PREMIUM COMBO / FLY MORE COMBO

# HPRC2400 for DJI Mavic 3 Cine / DJI Mavic 3 / DJI Mavic 3 Classic **MAV3-2400-01**



- 1 DJI Mavic 3 Cine / DJI Mavic 3 / DJI Mavic 3 Classic
- 2 Battery Charging Hub / Cables
- 3 DJI RC Pro / DJI RC-N1 / DJI Smart Controllers
- 4 Propellers / Portable Charger
- 5 Miscellaneous
- 6 ND Filters Set 2X
- 7 Intelligent Flight Battery



## TECHNICAL FEATURES


**Dimension:**  
 Internal dimension  
 377x263,9x150,8(mm) - 14.84x10.39x5.94(in)  
 External dimension  
 402x330,5x169,2(mm) - 15.83x13.01x6.66(in)

**Weight:**  
 empty: 2,23kg - 4.92lbs  
 with cubed foam: 2,58kg - 5.69lbs

**Temperature rating:**  
 Minimum                      Maximum  
 -40°C -40°F                      +80°C +176°F



## TECHNICAL DRAWING

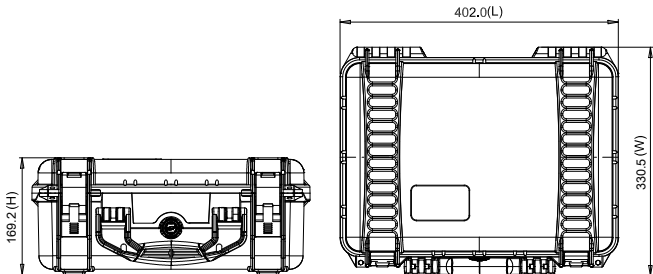

# HPRC3500 for DJI Mavic 3 Cine / DJI Mavic 3 / DJI Mavic 3 Classic **MAV3-3500-01**



- 1 DJI Mavic 3 Cine / DJI Mavic 3 / DJI Mavic 3 Classic
- 2 Battery Charging Hub / Cables
- 3 DJI RC Pro / DJI RC-N1 / DJI Smart Controllers
- 4 Propellers
- 5 Miscellaneous
- 6 ND Filters Set 2X
- 7 Intelligent Flight Battery



HPRC MAVIC 3 CINE / DJI MAVIC 3 / DJI MAVIC 3 CLASSIC

## TECHNICAL FEATURES


**Dimension:**  
 Internal dimension  
 433,5x319,3x168,8(mm) - 17.07x12.57x6.65(in)  
 External dimension  
 497,9x370,3x184,9(mm) - 19.6x14.58x7.28(in)

**Weight:**  
 empty: 3,00kg - 6.61lbs  
 with cubed foam: 3,55kg - 7.82lbs

**Temperature rating:**  
 Minimum            Maximum  
 -40°C -40°F        +80°C +176°F




## TECHNICAL DRAWING

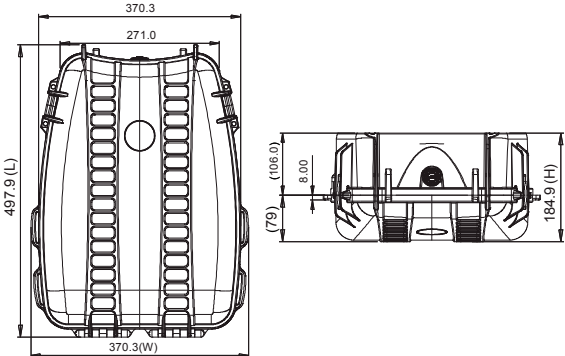

# Bag for DJI Mavic 3 Cine / DJI Mavic 3

## MAVBAG35-05

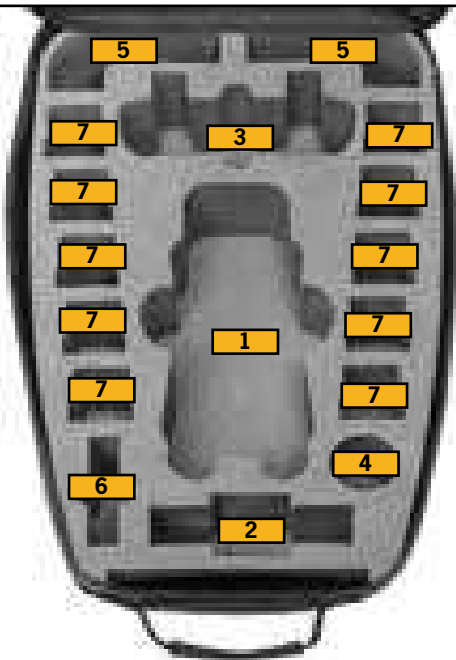

- 1 DJI Mavic 3 Cine / DJI Mavic 3
- 2 Battery Charging Hub / Cables
- 3 DJI RC Pro / DJI RC-N1 / DJI Smart Controllers
- 4 Propellers
- 5 Miscellaneous
- 6 ND Filters Set 2X
- 7 Intelligent Flight Battery






### TECHNICAL FEATURES

**Dimension:**  
internal dimension  
433x319x169(mm) - 17.05x12.56x6.65(in)  
external dimension  
498x370x185(mm) - 19.61x14.57x7.28(in)



# HPRC2800W for DJI Matrice 300 or 350 RTK

## S-M350-2800W-01

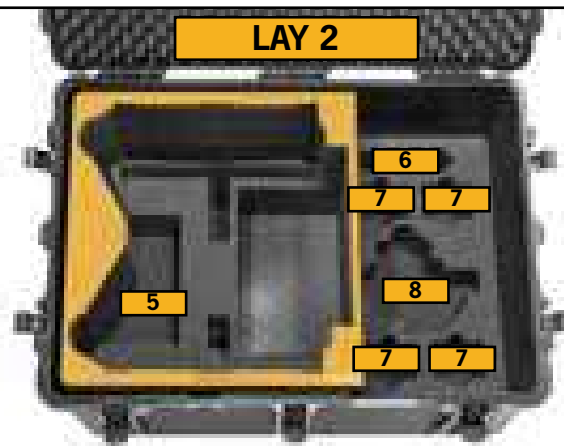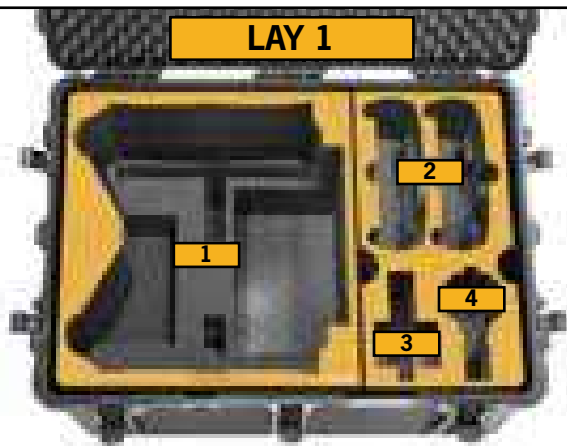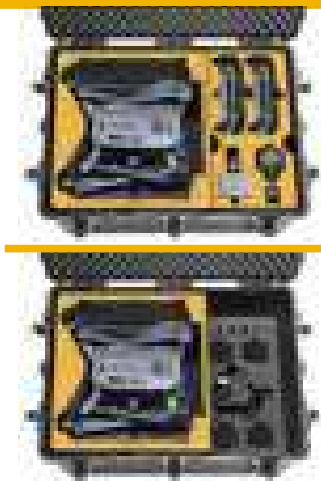

- 1** DJI Matrice 300 or 350 RTK in Landing Mode (2 Gimbal and 2 Batteries mounted)
- 2** 2X DJI RC Plus
- 3** Zenmuse L1
- 4** Zenmuse P1

- 5** Propellers
- 6** WB37 Intelligent Battery
- 7** TB60 or TB65 Intelligent Flight Battery
- 8** Zenmuse H20N



HPRC DJI MATRICE 300 OR 350 RTK

### TECHNICAL FEATURES

#### Dimension:

Internal dimension  
748,6x524,6x454,6(mm) - 29.47x20.65x17.9(in)  
External dimension  
813,3x586,5x480,5(mm) - 32.02x23.09x18.92(in)

#### Weight:


empty: 13,25kg - 29.22lbs  
with cubed foam: 17,43kg - 38.43lbs

#### Temperature rating:

Minimum Maximum  
-40°C -40°F +80°C +176°F




### TECHNICAL DRAWING

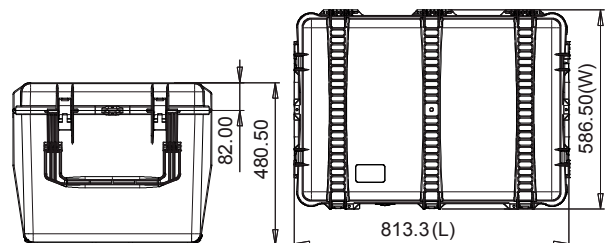


# HPRC2800W for DJI Matrice 300 RTK

## M300-2800W-03

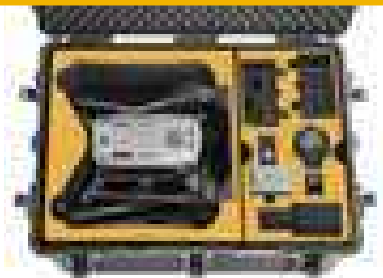


LAY 1

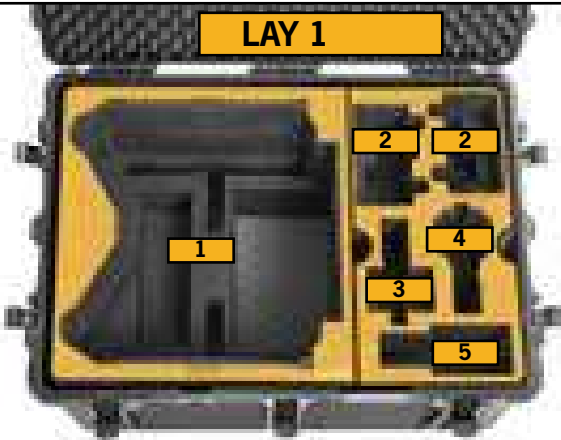

- 1 DJI Matrice 300 RTK in Landing Mode (2 Gimbal and 2 Batteries mounted)
- 2 DJI Smart Controller Enterprise (Battery Attached)
- 3 Zenmuse L1
- 4 Zenmuse P1
- 5 H20/H20T Gimbal

LAY 2

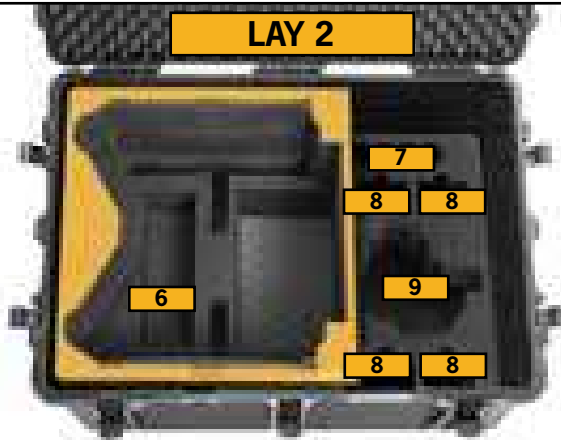

- 6 Propellers
- 7 WB37 Intelligent Battery
- 8 TB60 Intelligent Flight Battery
- 9 Zenmuse H20N



### TECHNICAL FEATURES

#### Dimension:

Internal dimension  
748,6x524,6x454,6(mm) - 29.47x20.65x17.9(in)  
External dimension  
813,3x586,5x480,5(mm) - 32.02x23.09x18.92(in)

#### Weight:


empty: 13,25kg - 29.22lbs  
with cubed foam: 17,43kg - 38.43lbs

#### Temperature rating:


Minimum Maximum  
-40°C -40°F +80°C +176°F



### TECHNICAL DRAWING

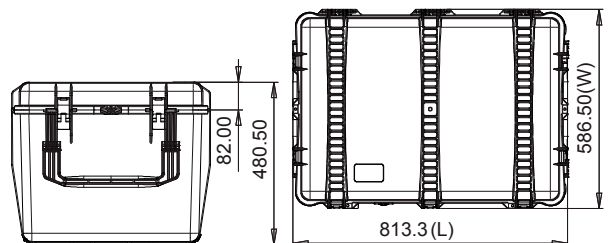

# HPRC2550W for Battery DJI Matrice 300/350 BAT2550W-04

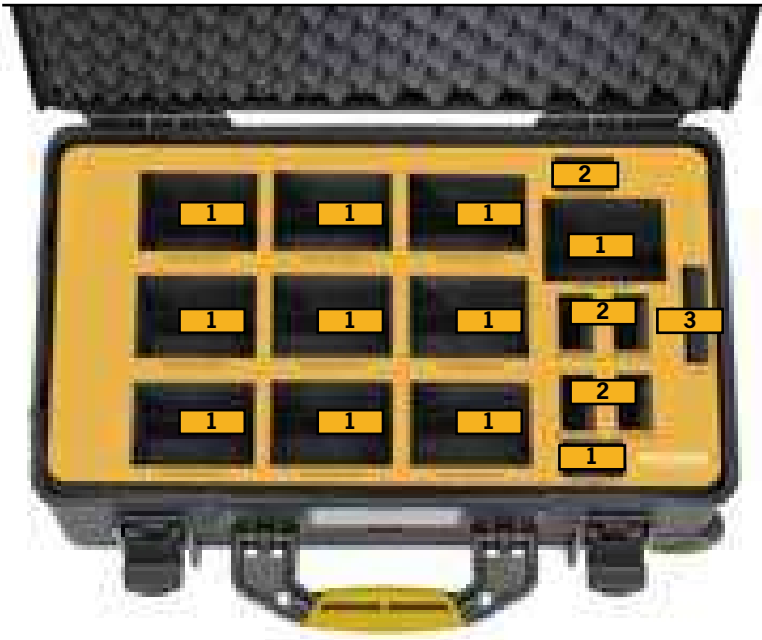

- 1 TB60/TB65 Intelligent Flight Battery
- 2 WB37 Intelligent Battery
- 3 Various/Perfect for Dry Keeper



HPRC M300/350 BATTERY CASE

## TECHNICAL FEATURES


**Dimension:**  
 internal dimension  
 513x288x200(mm) - 20.19x11.34x7.87(in)  
 external dimension  
 549x346x236(mm) - 21.61x13.62x9.29(in)

**Weight:**  
 empty: 4.35kg - 9.57lbs

**Temperature rating:**  
 Minimum            Maximum  
 -40°C -40°F        +80°C +176°F



## TECHNICAL DRAWING

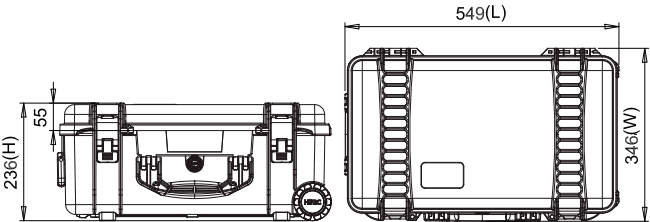

# HPRC6500W for DJI D-RTK 2

## DRTK6500W-01



HPRC DJI D-RTK 2




- 1 DRTK 2 Body
- 2 Accessories Box (Mobile Phone Holder; Charging Hub, Intelligent Battery, Battery Cover, Ac Power Adapter\Cable etc)
- 3 Extention Rod
- 4 Tripod

### TECHNICAL FEATURES


|                                                                                                                                                           |  |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| <b>Dimension:</b><br>Internal dimension<br>1280,7x279x242,8(mm) - 50.42x10.98x9.56(in)<br>External dimension<br>1328x335x299,8(mm) - 52.28x13.19x11.8(in) |  |
| <b>Weight:</b><br>empty: 7,2kg - 15.88lbs<br>with cubed foam: 9,03kg - 19.90lbs                                                                           |  |
| <b>Temperature rating:</b><br>Minimum<br>-40°C -40°F<br>Maximum<br>+80°C +176°F                                                                           |  |

### TECHNICAL DRAWING

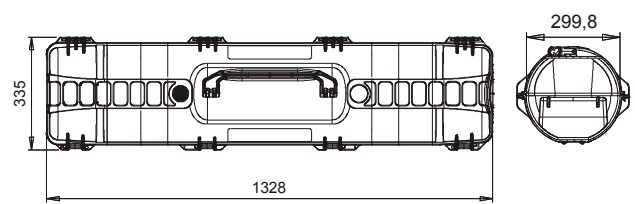

HPRC5200R for DJI Matrice 30T

M30T-5200R-01

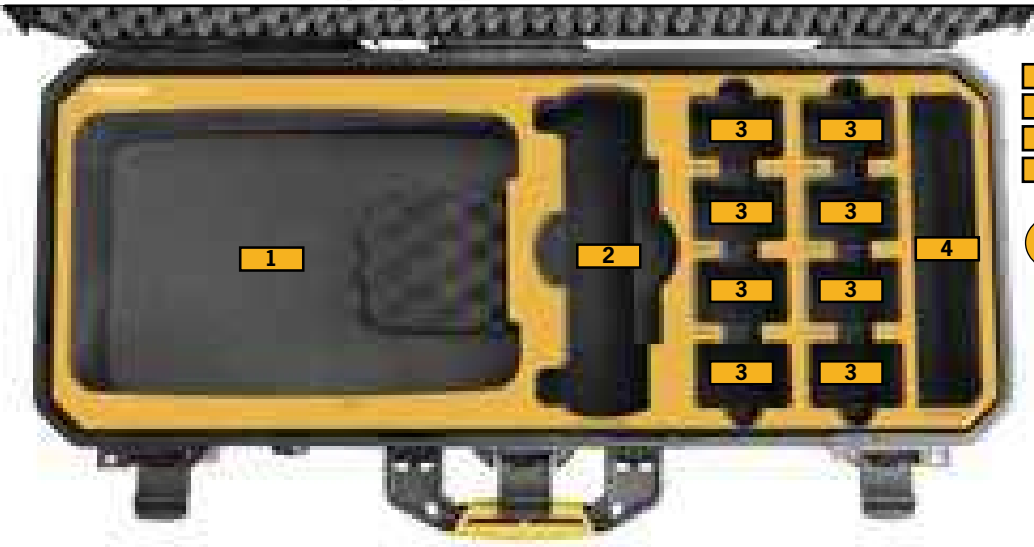

- 1 Aircraft Body
- 2 DJI RC Plus Remote Controller
- 3 TB30 Battery
- 4 Various/Miscellaneous



HPRC DJI MATRICE 30T

TECHNICAL FEATURES


**Dimension:**  
Internal dimension  
772x302x210(mm) - 30.39x11.89x8.26 (in)  
External dimension  
802x355x246.7(mm) - 31.57x13.97x9,71 (in)

**Weight:**  
empty: 5.05kg – 11.1lbs

**Temperature rating:**  
Minimum            Maximum  
-40°C -40°F        +80°C +176°F



TECHNICAL DRAWING

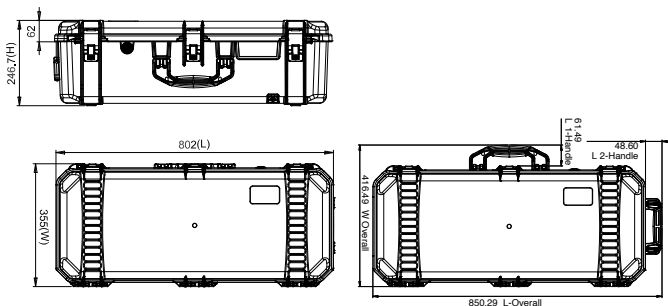

# HPRC2760W for DJI Matrice 30T M30T-2760W-01



- 1 WB37 Battery
- 2 TB30 Battery
- 3 DJI RC Plus Remote Controller
- 4 Aircraft Body
- 5 Loudspeaker
- 6 Miscellaneous



## TECHNICAL FEATURES


**Dimension:**  
 Internal dimension  
 690x450x301(mm) - 27.16x17.72x11.85(in)  
 External dimension  
 750x511x329(mm) - 29.53x20.12x12.95(in)

**Weight:**  
 empty: 8,93kg - 19.69lbs  
 with cubed foam: 10,72kg - 23.63lbs

**Temperature rating:**  
 Minimum  
 -40°C -40°F  
 Maximum  
 +80°C +176°F



## TECHNICAL DRAWING

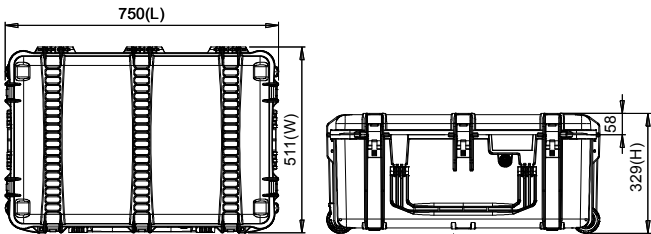

# HPRC2700W for DJI Matrice 30T

## M30T-2700W-01



- 1 Aircraft Body
- 2 Various/Miscellaneous
- 3 DJI RC Plus Remote Controller
- 4 Various/Miscellaneous
- 5 TB30 Battery



### TECHNICAL FEATURES


**Dimension:**  
Internal dimension  
554,7x458,7x246(mm) - 21.84x18.06x9.69(in)  
External dimension  
617,5x527,3x279,6(mm) - 24.31x20.76x11.0(in)

**Weight:**  
empty: 7,75kg - 17.09lbs  
with cubed foam: 9,07kg - 19.99lbs

**Temperature rating:**  
Minimum Maximum  
-40°C -40°F +80°C +176°F



### TECHNICAL DRAWING

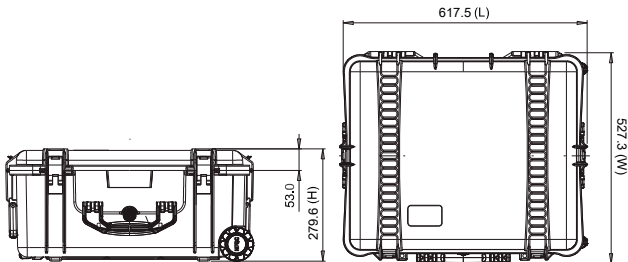

# HPRC2460 for Batteries TB30 and DJI RC Plus BAT2460-01



- 1 DJI RC Plus Remote Controller
- 2 WB37 Battery
- 3 TB30 Battery



## TECHNICAL FEATURES


**Dimension:**  
 Internal dimension  
 409x306x175(mm) - 16.10x12.05x6.89(in)  
 External dimension  
 435x377,8x193(mm) - 17.13x14.87x7.60(in)

**Weight:**  
 empty: 2,55kg - 5.62lbs  
 with foam: 3,14kg - 6.92lbs




**Temperature rating:**  
 Minimum      Maximum  
 -40°C -40°F      +80°C +176°F



## TECHNICAL DRAWING

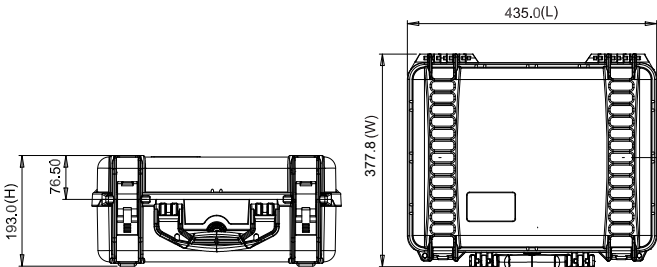

# HPRC2800W for DJI Inspire 3 S-INS3-2800W-01

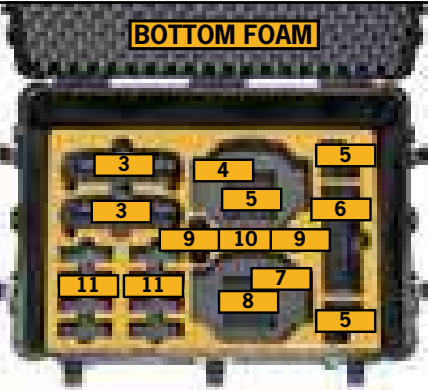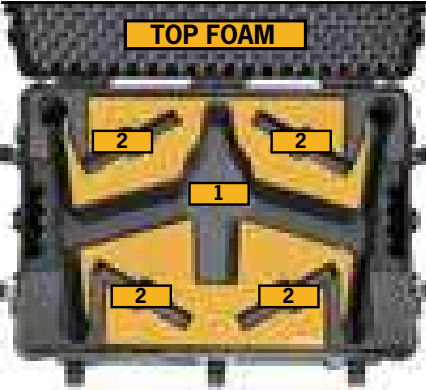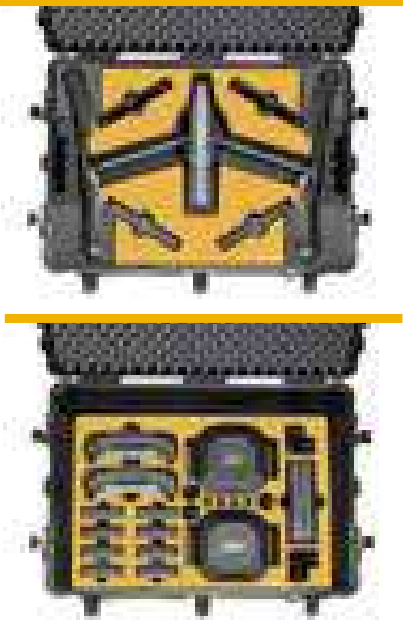

- 1 Inspire 3 Aircraft
- 2 Foldable Quick-Release Propellers (Pair)/ Miscellaneous
- 3 RC Plus
- 4 Zenmuse X9-8K Air Gimbal Camera Case
- 5 Various / Miscellaneous
- 6 TB51 Intelligent Battery Charging Hub
- 7 Lens Carrying Box (18/24/35/50mm)
- 8 RC Plus Strap
- 9 Cable
- 10 PROSSD 1TB
- 11 TB51 Intelligent Battery



## TECHNICAL FEATURES


**Dimension:**  
 Internal dimension:  
 748,6x524,6x454,6(mm) - 29.47x20.65x17.90(in)  
 External dimension:  
 813,3x586,5x480,5(mm) - 32.02x23.09x18.92(in)

**Weight:**  
 empty: 13,25kg - 29.22lbs  
 with cubed foam: 17,43kg - 38.43lbs

**Temperature rating:**  
 Minimum                      Maximum  
 -40°C -40°F                      +80°C +176°F





## TECHNICAL DRAWING

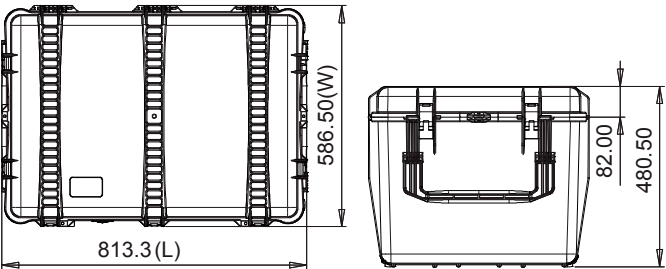

# HPRC2550W for Inspire 3 batteries

## S-BAT2550W-O5

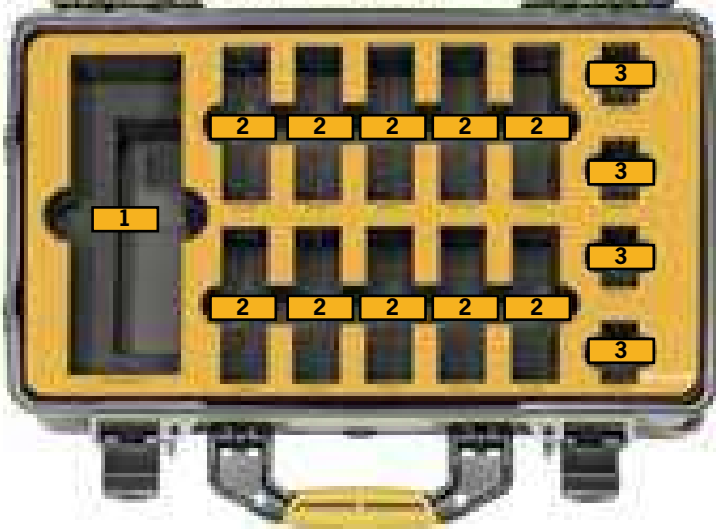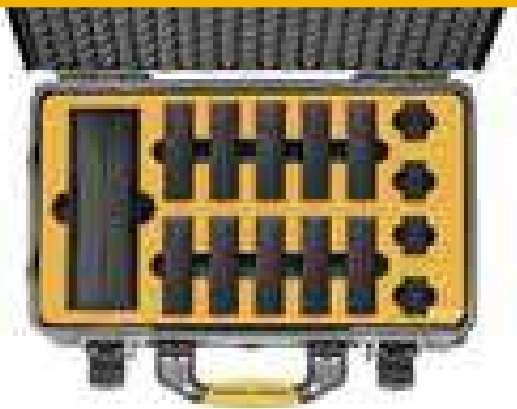

- 1 Charging Hub Inspire 3
- 2 TB51 Battery
- 3 WB37 Battery



### TECHNICAL FEATURES


**Dimension:**  
internal dimension  
513x288x200(mm) - 20.19x11.34x7.87(in)  
external dimension  
549x346x236(mm) - 21.61x13.62x9.29(in)

**Weight:**  
empty: 4,35kg - 9.57lbs  
with cubed foam: 5,04kg - 11.10lbs

**Temperature rating:**  
Minimum -40°C -40°F  
Maximum +80°C +176°F




### TECHNICAL DRAWING

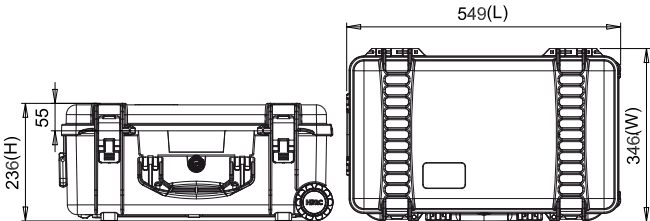

# HPRC2300 for DJI Mini 4 Pro Fly More Combo with Smart Controller

## S-MAVM-2300-04

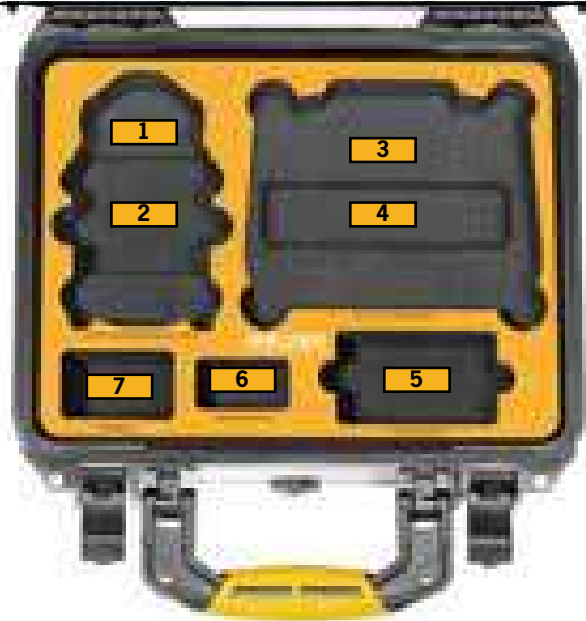

- 1 DJI Mini 4 Pro Fly More Combo
- 2 Spare Propellers/Cables
- 3 Flight Batteries
- 4 Smart Controller
- 5 Two-Way Charging Hub
- 6 Intelligent Flight Battery
- 7 Miscellaneous



### TECHNICAL FEATURES


**Dimension:**  
Internal dimension:  
305,7x232,4x137,5(mm) - 12.04x9.15x5.41(in)  
External dimension:  
334,6x303x155,2(mm) - 13.17x11.93x6.11(in)

**Weight:**  
empty: 1,75kg - 3.86lbs  
with cubed foam: 1,90kg - 4.19lbs


**Temperature rating:**  
Minimum      Maximum  
-40°C -40°F      +80°C +176°F



### TECHNICAL DRAWING

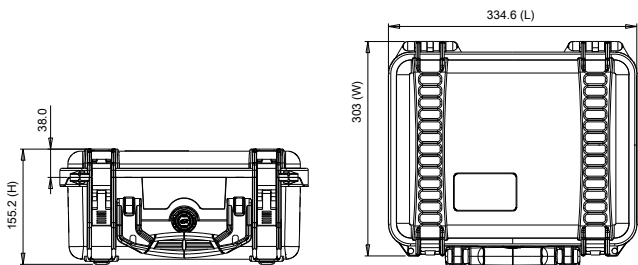

# HPRC2300 for DJI Mini 3 Pro / DJI Mini 3 Fly More Combo with RC and RC-N1 Controller MAVM-2300-03-01

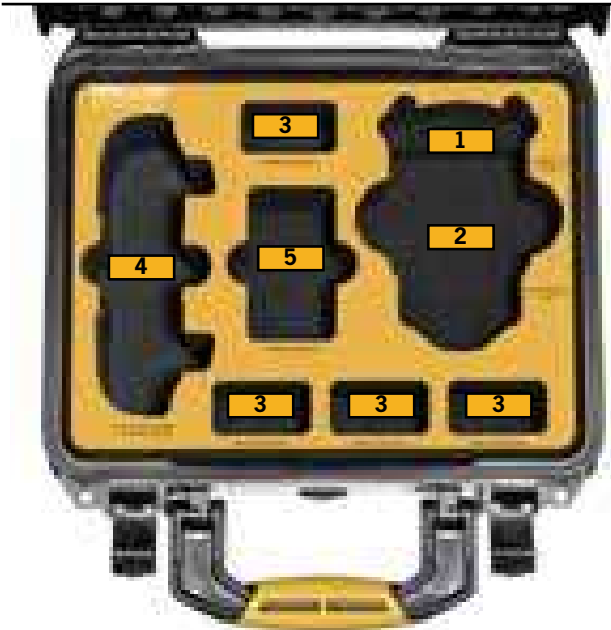

- 1 DJI Mini 3 Pro / DJI Mini 3 Fly More Combo
- 2 Spare Propellers/Cable
- 3 Intelligent Flight Battery
- 4 RC-N1 Remote Controller / RC Smart Controller
- 5 Two-Way Charging Hub



HPRC DJI MINI 3 PRO / DJI MINI 3

## TECHNICAL FEATURES


**Dimension:**  
 Internal dimension  
 305,7x232,4x137,5(mm) - 12.04x9.15x5.41 (in)  
 External dimension  
 334,6x303x155,2(mm) - 13.17x11.93x6.11(in)

**Weight:**  
 empty: 1,75kg - 3.86lbs  
 with cubed foam: 1,90kg - 4.19lbs

**Temperature rating:**  
 Minimum                      Maximum  
 -40°C -40°F                      +80°C +176°F




## TECHNICAL DRAWING

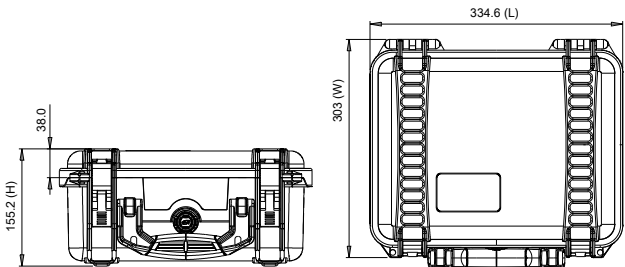

# HPRC2400 for DJI Air 3 Fly More Combo

## S-MAV3A-2400-01

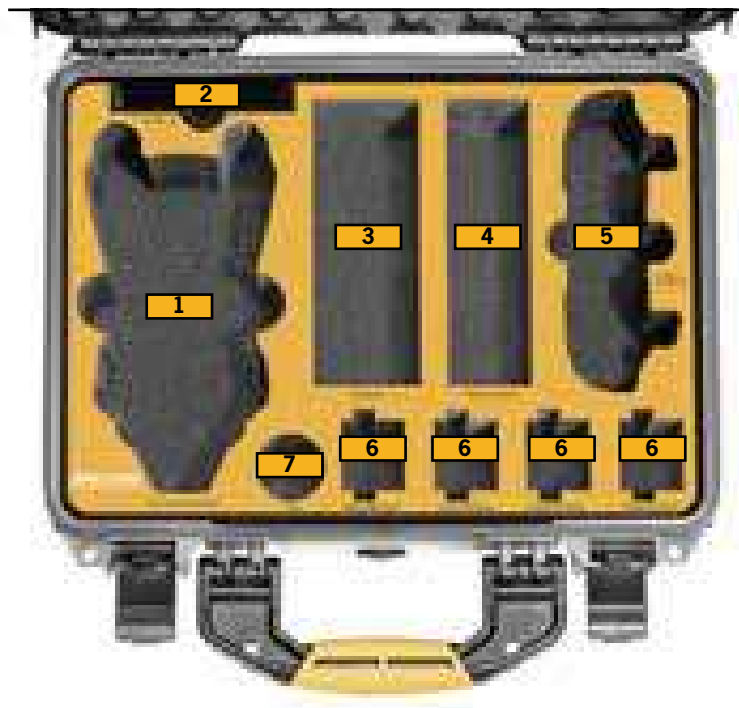

- 1 DJI Air 3 with Gimbal Protector
- 2 ND Filters Set
- 3 Miscellaneous
- 4 Battery Charging Hub
- 5 DJI RC 2 or DJI RC-N2
- 6 Intelligent Flight Battery
- 7 Cables



HPRC DJI AIR 3 FLY MORE COMBO

### TECHNICAL FEATURES


**Dimension:**  
Internal dimension:  
377x263,9x150,8(mm) - 14.84x10.39x5.94(in)  
External dimension:  
402x330,5x169,2(mm) - 15.83x13.01x6.66(in)

**Weight:**  
empty: 2,17kg - 4.78lbs  
with cubed foam: 2,58kg - 5.69lbs

**Temperature rating:**  
Minimum      Maximum  
-40°C -40°F      +80°C +176°F



### TECHNICAL DRAWING

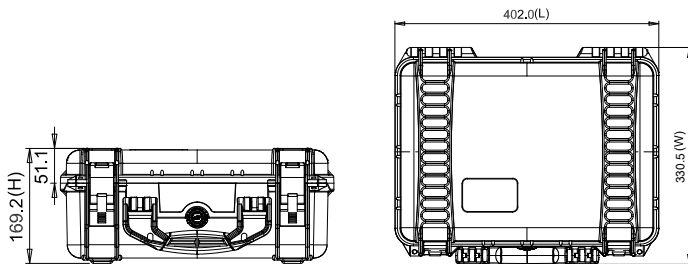

# HPRC3500 for DJI Air 3 Fly More Combo

## S-MAV3A-3500-01



- 1 DJI Air 3 with Gimbal Protector
- 2 DJI RC 2 or DJI RC-N2
- 3 Cables
- 4 Intelligent Flight Battery
- 5 Propellers
- 6 Battery Charging Hub
- 7 ND Filters Set



### TECHNICAL FEATURES


**Dimension:**  
Internal dimension:  
433,5x319,3x168,8(mm) - 17.07x12.57x6.65(in)  
External dimension:  
497,9x370,3x185(mm) - 19.60x14.58x7.28(in)

**Weight:**  
empty: 3kg - 6.61lbs  
with cubed foam: 3,55kg - 7.82lbs

**Temperature rating:**  
Minimum      Maximum  
-40°C -40°F      +80°C +176°F



### TECHNICAL DRAWING

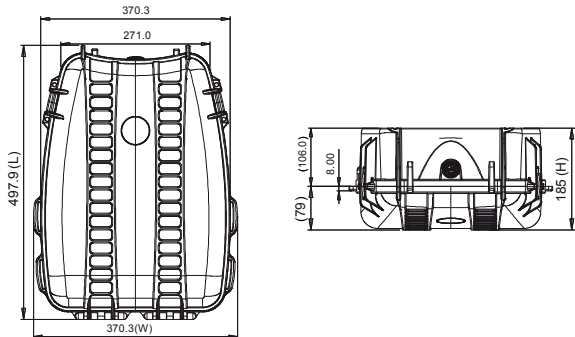

# HPRC2500 for DJI Avata Pro - View Combo

## AVAT-2500-01



- 1 DJI Avata
- 2 Battery Charging Hub
- 3 Cable/Miscellaneous
- 4 Intelligent Flight Battery
- 5 Goggles 2 Battery
- 6 Goggles 2
- 7 Cable/Miscellaneous
- 8 Controller
- 9 Power Adapter
- 10 Eyeglass Frames (Pair)
- 11 Motion Controller



### TECHNICAL FEATURES


**Dimension:**  
 Internal dimension:  
 449,8x322,9x174,9(mm) - 17.71x12.71x6.89(in)  
 External dimension:  
 478,1x389,4x194(mm) - 18.82x15.33x7.64(in)

**Weight:**  
 empty: 3,08kg - 6.79lbs  
 with cubed foam: 3,71kg - 8.18lbs

**Temperature rating:**  
 Minimum            Maximum  
 -40°C -40°F        +80°C +176°F



### TECHNICAL DRAWING

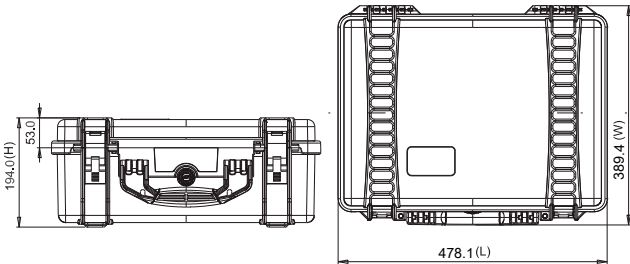

# HPRC3500 for DJI Avata Pro - View Combo

## AVAT-3500-01



- 1 DJI Avata
- 2 Cable/Miscellaneous
- 3 Battery Charging Hub
- 4 Goggles 2
- 5 Intelligent Flight Battery
- 6 Eyeglass Frames (Pair)
- 7 Controller
- 8 Cable/Miscellaneous
- 9 Power Adapter
- 10 Goggles 2 Battery
- 11 Motion Controller



### TECHNICAL FEATURES


**Dimension:**  
Internal dimension:  
433,5x319,3x168,8(mm) - 17.07x12.57x6.65(in)  
External dimension:  
497,9x370,3x184,9(mm) - 19.6x14.58x7.28(in)

**Weight:**  
empty: 3,00kg - 6.61lbs  
with cubed foam: 3,55kg - 7.82lbs

**Temperature rating:**  
Minimum Maximum  
-40°C -40°F +80°C +176°F



### TECHNICAL DRAWING

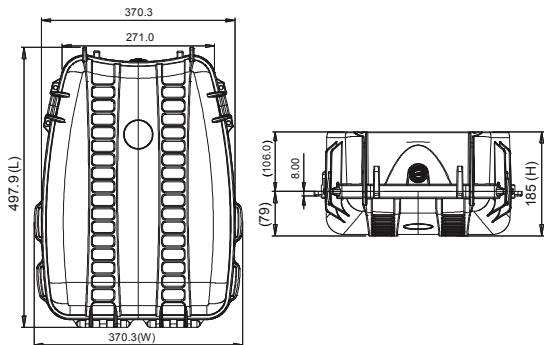

# HPRC2500 for DJI FPV Combo

## FPV-2500-01



- 1 DJI FPV Drone
- 2 Goggles Battery
- 3 Fly More kit
- 4 Goggles V2 with Goggles Antenna (or TrueRC) mounted
- 5 Remote Controller
- 6 Motion Controller
- 7 AC Power Adaptor
- 8 Intelligent Flight Battery
- 9 Propellers (Pair)/Cable



HPRC DJI FPV

### TECHNICAL FEATURES


**Dimension:**  
internal dimension  
449,8x322,9x174,9(mm) - 17.71x12.71x6.89(in)  
external dimension  
478,1x389,4x194(mm) - 18.82x15.33x7.64(in)

**Weight:**  
empty: 3,22kg - 7.10lbs  
with cubed foam: 3,69kg - 8.12lbs

**Temperature rating:**  
Minimum Maximum  
-40°C -40°F +80°C +176°F



### TECHNICAL DRAWING

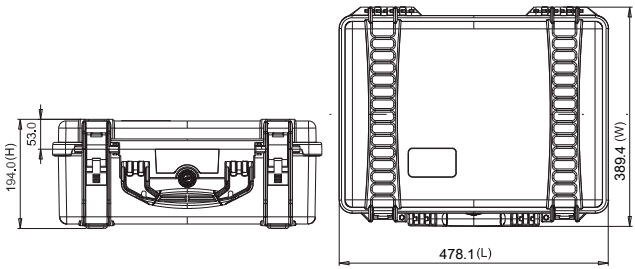

# HPRC3600 for DJI FPV Combo FPV-3600-01



- 1 DJI FPV Drone
- 2 Goggles Battery
- 3 Intelligent Flight Battery
- 4 AC Power Adaptor
- 5 Fly More kit
- 6 Propellers (Pair)/Cable
- 7 Miscellaneous/Motion Controller
- 8 Miscellaneous
- 9 Remote Controller
- 10 Goggles V2 with Goggles Antenna (or TrueRC) mounted



HPRC DJI FPV


## TECHNICAL FEATURES

**Dimension:**  
 Internal dimension  
 479x354x194(mm) - 18.86x13.94x7.64(in)  
 External dimension  
 542x402x220(mm) - 21.34x15.83x8.66(in)

**Weight:**  
 empty: 3,23 kg - 7,11 lbs  
 with foam: 3,75 kg - 8,26 lbs

**Temperature rating:**  
 Minimum            Maximum  
 -40°C -40°F        +80°C +176°F

## TECHNICAL DRAWING

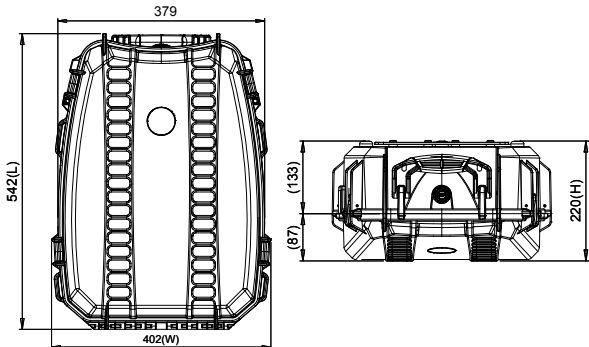

# HPRC2700W for DJI Phantom 4RTK

## PHA4RTK-2700W-01



- 1 Dji Phantom 4 RTK / Multispectral
- 2 Intelligent Flight Battery
- 3 Remote Controller
- 4 Ipad Air/Tablet Up to 10"
- 5 Hprc1100 For 8 Microsd Cards
- 6 Charging Hub for WB37
- 7 Battery WB37
- 8 Charging Hub for Int.flight Battery
- 9 AC Power Adapter / Miscellaneous Accessories
- 10 Propellers



suitable for v 2.0 low noise propellers

### TECHNICAL FEATURES


**Dimension:**  
Internal dimension  
554,7x458,7x246(mm) - 21.84x18.06x9.69(in)  
External dimension  
617,5x527,3x279,6(mm) - 24.31x20.76x11.0(in)

**Weight:**  
empty: 7,75kg - 17.09lbs  
with cubed foam: 9,07kg - 19.99lbs

**Temperature rating:**  
Minimum      Maximum  
-40°C -40°F      +80°C +176°F



### TECHNICAL DRAWING

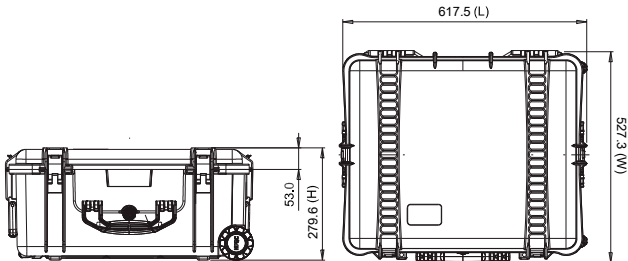

# HPRC2710 for DJI Phantom 4 PHA4-2710-02



- 1 DJI Phantom 4 / Pro / 4 Pro + with Props On / 4 V2.0
- 2 Cables / Miscellaneous
- 3 3 x Filters
- 4 Charger + Cables
- 5 2 x Kits of Spare Props
- 6 Spare Battery
- 7 Spare Battery / Miscellaneous Accessories
- 8 Complimentary HPRC1100 for 8 MicroSD Cards
- 9 Ipad Air / Tablet up to 10"
- 10 Controller Monitor Hood for Tablets / Instructions
- 11 Remote Controller
- 12 Cables
- 13 Small Tools

suitable for v 2.0 low noise propellers

## TECHNICAL FEATURES


**Dimension:**  
 Internal dimension  
 555x459x256(mm) - 21.85x18.07x10.08(in)  
 External dimension  
 617x525x280(mm) - 24.29x20.67x11.02(in)

**Weight:**  
 empty: 6.71kg - 14.76lbs


**Temperature rating:**  
 Minimum                      Maximum  
 -40°C -40°F                      +80°C +176°F




## TECHNICAL DRAWING

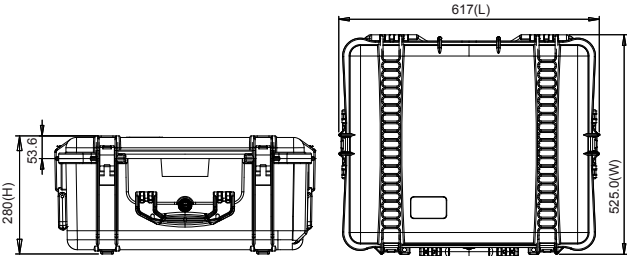

Bag for DJI Phantom 4  
PHA4-BAG27-02

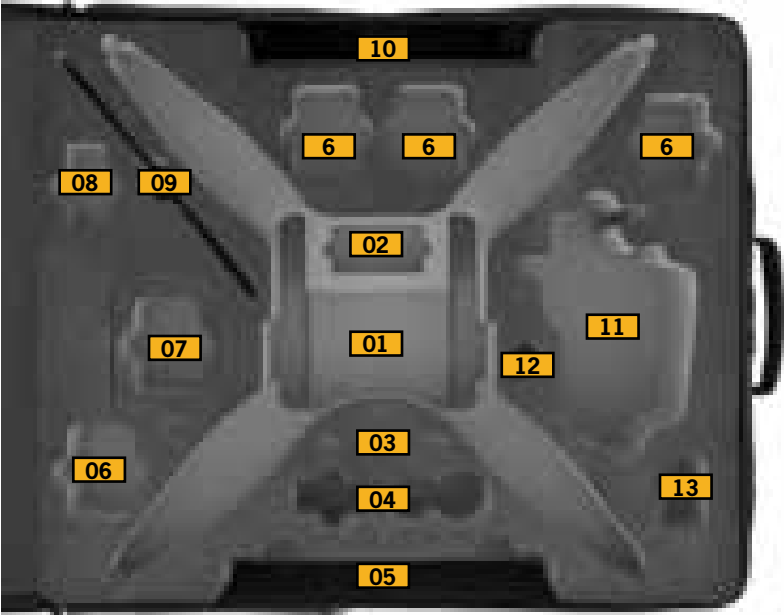

suitable for v 2.0 low noise propellers



**Dimension:** external dimension  
560x470x235(mm) - 22.05x18.50x9.25(in)

**Weight:**  
empty: 7,70 kg - 16,98 lbs  
with foam: 8,72 kg – 19,21 lbs

# HPRC2730W for DJI Ronin 4D-6K Combo

## R4D-2730W-01



- 1 DJI Ronin 4D Mounted
- 2 Charger
- 3 Lens DL 24/35/50 mm F2.8 LS
- 4 DL Mount
- 5 MRW-G1.SYM (Sony)
- 6 DJI Prossd 1TB
- 7 Various/Miscellaneous
- 8 DJI High-Bright Remote Monitor
- 9 DJI Zenmuse X9 Counterweight
- 10 CF Express Type B
- 11 NP-F970 (Sony)
- 12 TB50 Intelligent Flight Battery
- 13 Various/Miscellaneous



### TECHNICAL FEATURES


**Dimension:**  
Internal dimension  
503x459x316(mm) - 19.80x18.07x12.44(in)  
External dimension  
616,9x531x349,6(mm) - 24.29x20.91x13.76(in)

**Weight:**  
empty: 8,41kg - 18.54lbs  
with cubed foam: 10,43kg - 22.99lbs

**Temperature rating:**  
Minimum      Maximum  
-40°C -40°F      +80°C +176°F



### TECHNICAL DRAWING

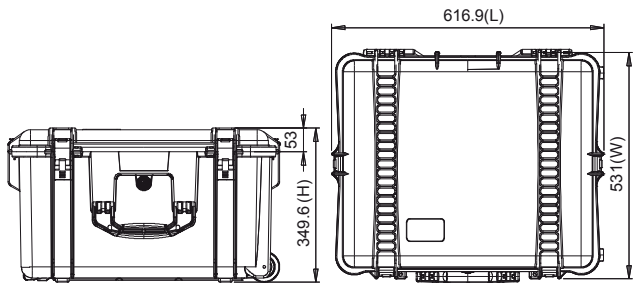

# HPRC2600 for DJI RS 3 Pro Combo RS3-2600-01



- 1 Gimbal with BG30 Grip mounted
- 2 Focus Motor Rod Mount Kit Combo
- 3 Quick-Release Plate (Arca-Swiss/Manfrotto)
- 4 Phone Holder
- 5 Lower Quick-Release Plate (Extended)
- 6 Ronin Image Transmitter
- 7 Cable/Miscellaneous
- 8 Briefcase Handle
- 9 Extended Grip/Tripod (Metal)
- 10 Focus Motor (2022)



HPRC DJI RS 3 PRO COMBO

## TECHNICAL FEATURES


**Dimension:**  
 Internal dimension  
 482,4x358,3x198,1(mm) - 18.99x14.10x7.80(in)  
 External dimension  
 543,4x426,8x218,1(mm) - 21.39x16.8x8.59(in)

**Weight:**  
 empty: 4,25kg - 9.37lbs  
 with cubed foam: 5,05kg - 11.13lbs

**Temperature rating:**  
 Minimum Maximum  
 -40°C -40°F +80°C +176°F




## TECHNICAL DRAWING

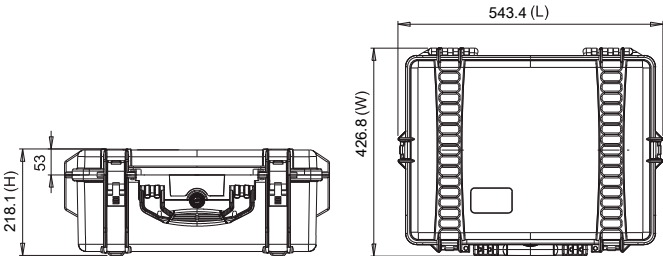

# HPRC2300 for DJI RS 3 Mini Creator Combo

## RS3M-2300-01

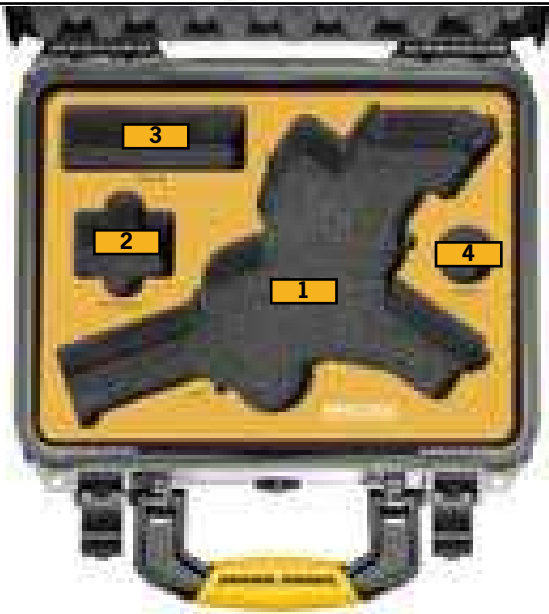

- 1 Gimbal
- 2 Mic Charging Case
- 3 Various/cable
- 4 Mini Tripod



HPRC DJI RS 3 MINI CREATOR COMBO

### TECHNICAL FEATURES


**Dimension:**  
Internal dimension  
305,7x232,4x137,5(mm) - 12.04x9.15x5.41 (in)  
External dimension  
334,6x303x155,2(mm) - 13.17x11.93x6.11(in)

**Weight:**  
empty: 1,75kg - 3.86lbs  
with foam: 1,90kg - 4.19lbs

**Temperature rating:**  
Minimum      Maximum  
-40°C -40°F      +80°C +176°F



### TECHNICAL DRAWING

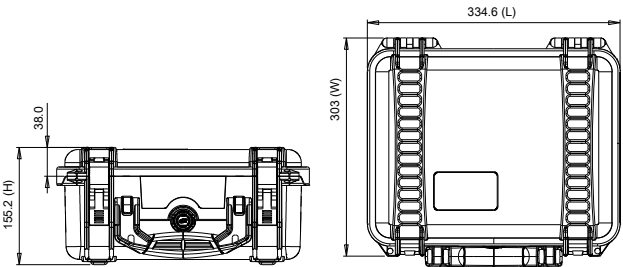

# HPRC 1400 for DJI Pocket 2 Creative Combo Kit OSMPKT-1400-02



- 1 DJI Pocket 2 with 1/4"-20 Tripod Mounted
- 2 Micro Tripod
- 3 Mini Control Stick
- 4 Cable/Wireless Microphone Windscreen
- 5 Do-it-All Handle
- 6 Wireless Microphone Transmitter/SD Card
- 7 Wide-Angle Lens
- 8 Lightning (iOS) Smartphone Adapter/ USB Type-C Smartphone Adapter



HPRC DJI POCKET 2

## TECHNICAL FEATURES


**Dimension:**  
 internal dimension  
 180x110x40(mm) - 7.08x4.33x1.57(in)  
 external dimension  
 200,3x142,4x48(mm) - 7.89x5.61x1.89(in)

**Weight:**  
 empty: 0,26kg - 0.57lbs

**Temperature rating:**  
 Minimum Maximum  
 -40°C -40°F +80°C +176°F




## TECHNICAL DRAWING

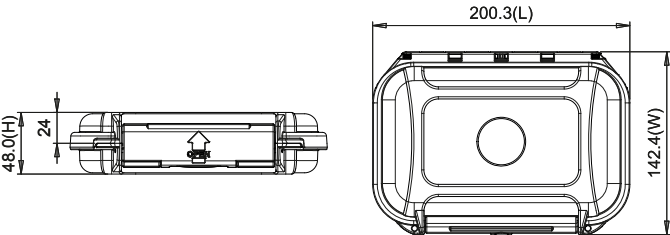

HPRC1400 for DJI Osmo Pocket 3 Creator Combo

S-OSMPKT-1400-03

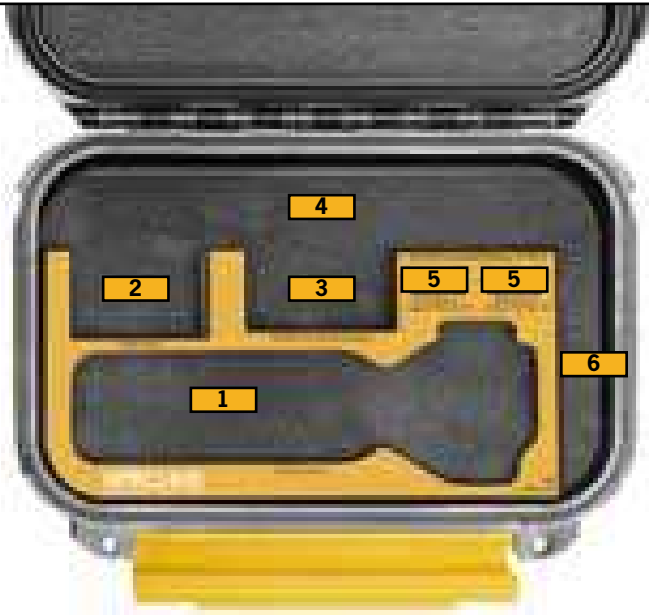

- 1
- DJI Osmo Pocket 3

2

 Battery Handle

3

 Transmitter with attached Clip Magnet

4

 Mini Tripod with attached Handle With 1/4" Thread

5

 Wide-Angle Lens + Magnetic ND Filters Set

6

 Cable + Windscreen

TECHNICAL FEATURES


**Dimension:**  
Internal dimension:  
180x110x40(mm) - 7.08x4.33x1.57(in)  
External dimension:  
200,3x142,4x48(mm) - 7.89x5.61x1.89(in)

**Weight:**  
empty: 0,26kg - 0.57lbs

**Temperature rating:**  
Minimum                      Maximum  
-40°C -40°F                      +80°C +176°F



TECHNICAL DRAWING

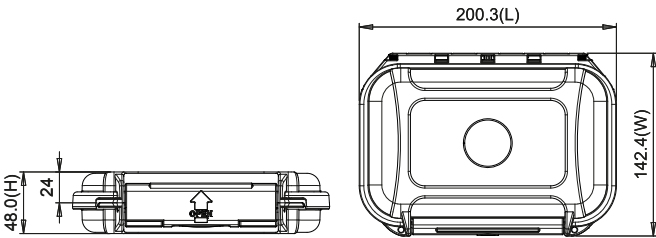

 READY





## AUTEL ROBOTICS

HPRC READY MADE SOLUTIONS – 2023

# HPRC2460 for Autel Robotics EVO Lite+ Premium Bundle LITE-2460-01



- 1 Aircraft (including battery, propellers and gimbal cover)
- 2 Multi-Charger
- 3 Spare Propellers
- 4 Power Adapter
- 5 Cable
- 6 Spare Battery
- 7 Remote Control
- 8 Filter Set
- 9 Usb Cable



## TECHNICAL FEATURES

### Dimension:

Internal dimension  
 409x306x175(mm) - 16.10x12.05x6.89(in)  
 External dimension  
 435x377,8x193(mm) - 17.13x14.87x7.60(in)

### Weight:


empty: 2,55kg - 5.62lbs  
 with cubed foam: 3,14kg - 6.92lbs

### Temperature rating:

Minimum Maximum  
 -40°C -40°F +80°C +176°F



## TECHNICAL DRAWING

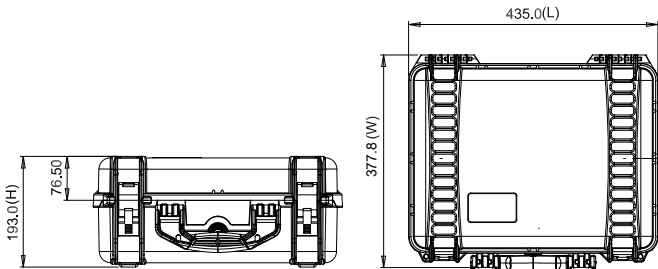

# HPRC2300 for Autel Robotics Evo Nano+ Premium Bundle

## NANO-2300-01



- 1 Autel EVO Nano+ including battery, propellers, gimbal cover and propeller holder
- 2 Spare Propellers
- 3 Spare Battery
- 4 Remote Control
- 5 Cables/Miscellaneous
- 6 Power Adapter
- 7 Multi-Charger



### TECHNICAL FEATURES

#### Dimension:

Internal dimension  
305,7x232,4x137,5(mm) - 12.04x9.15x5.41 (in)  
External dimension  
334,6x303x155,2(mm) - 13.17x11.93x6.11(in)

#### Weight:


empty: 1,70kg - 3.75lbs  
with foam: 1,9kg - 4.19lbs

#### Temperature rating:

Minimum Maximum  
-40°C -40°F +80°C +176°F



### TECHNICAL DRAWING

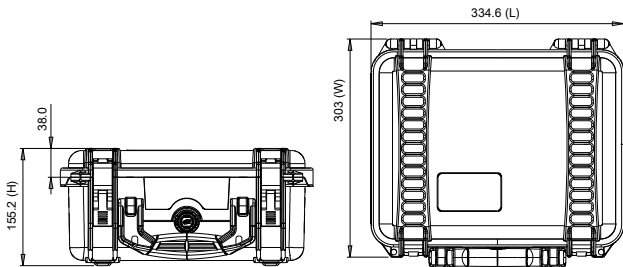

HPRC2400 Autel Robotics EVO II  
6K / 8K Drone  
**EVO2-2400-02**



- 1 Autel Robotics EVO II 6K / 8K with propellers - low noise
- 2 Remote Controller
- 3 Battery Charging Hub
- 4 Flight Battery
- 5 Cable/Propellers/Accessories
- 6 Micro USB Cable
- 7 Charger



## TECHNICAL FEATURES

**Dimension:**

Internal dimension  
377x263,9x150,8(mm) - 14.84x10.39x5.94(in)  
External dimension  
402x330,5x169,2(mm) - 15.83x13.01x6.66(in)

**Weight:**


empty: 2,38kg - 5.25lbs

**Temperature rating:**

|             |              |
|-------------|--------------|
| Minimum     | Maximum      |
| -40°C -40°F | +80°C +176°F |



## TECHNICAL DRAWING

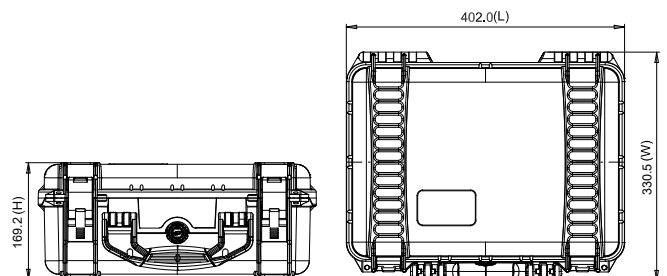



ATOMOS

HPSC READY MADE SOLUTIONS – 2023

# HPRC2300 for Atomos Ninja V

## NJAV-2300-01



- 1 Atomos Ninja with Atom X SSDmini and Battery assembled on drone
- 2 Ninja Sunhood
- 3 Battery
- 4 12V-3A AC Power Supply
- 5 Cables/Miscellaneous
- 6 3 Master Caddy II
- 7 Docking Station
- 8 Battery Eliminator
- 9 Fast Charger



### TECHNICAL FEATURES


**Dimension:**  
Internal dimension  
305,7x232,4x137,5(mm) - 12.04x9.15x5.41(in)  
External dimension  
334,6x303x155,2(mm) - 13.17x11.93x6.11(in)

**Weight:**  
empty: 1,75kg - 3.86lbs  
with cubed foam: 1,90kg - 4.19lbs

**Temperature rating:**  
Minimum Maximum  
-40°C -40°F +80°C +176°F



### TECHNICAL DRAWING

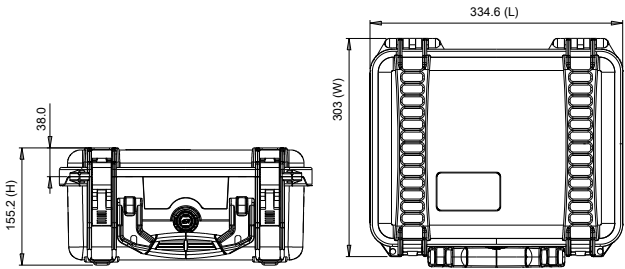

# HPRC2400 for ATOMOS Shogun, Shogun Ultra and Shogun Connect **S-SHGC-2400-01**



- 1** Atomos Shogun, Shogun/Ultra/Connect with Antennas Mounted
- 2** Adaptor/Miscellaneous
- 3** Various
- 4** Battery NP-F960
- 5** Master Caddy
- 6** Battery NP-F750
- 7** Charger
- 8** Docking Station
- 9** Charger



## TECHNICAL FEATURES


**Dimension:**  
 Internal dimension:  
 377x263,9x150,8(mm) - 14.84x10.39x5.94(in)  
 External dimension:  
 402x330,5x169,2(mm) - 15.83x13.01x6.66(in)

**Weight:**  
 empty: 2,17kg - 4.78lbs  
 with cubed foam: 2,58kg - 5.69lbs

**Temperature rating:**  
 Minimum      Maximum  
 -40°C -40°F      +80°C +176°F



## TECHNICAL DRAWING

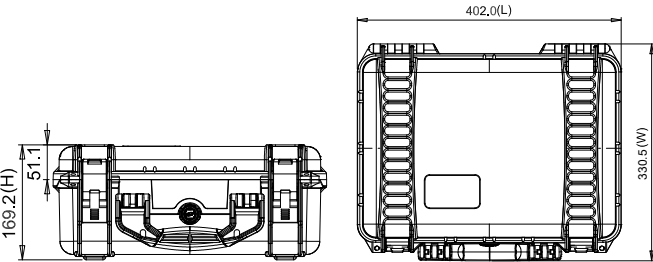

HPRC2730W for Atomos Sumo19"/  
Sumo19" SE  
SM19-2730W-01



- 1 Atomos Sumo 19"/ Sumo19" SE Monitor Recorder
- 2 Atomos Sunhood



- 3 Charger
- 4 3 Master caddy II
- 5 DM-130A Gold Mount Mini Battery or similar
- 6 D-4BA Battery Extender or similar

TECHNICAL FEATURES


**Dimension:**  
internal dimension  
503x459x316(mm) - 19.80x18.07x12.44(in)  
external dimension  
616,9x531x349,6(mm) - 24.29x20.91x13.76(in)

**Weight:**  
empty: 8,41kg - 18.54lbs  
with cubed foam: 10,43kg - 22.99lbs

**Temperature rating:**  
Minimum Maximum  
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

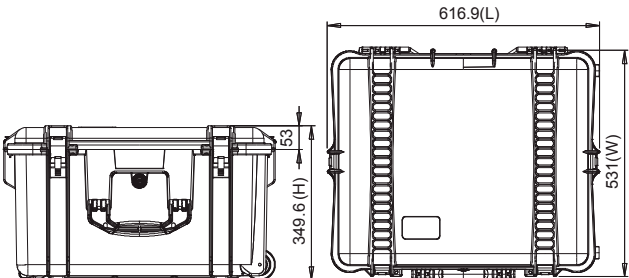



BLACKMAGIC

HPRC READY MADE SOLUTIONS – 2023

# HPRC2400 for Blackmagic Pocket Cinema Camera 6K Pro

## PKT6P-2400-01



- 1 Blackmagic Pocket Cinema Camera 6K Pro with or without professional cage
- 2 Lenses: Diameter Max 90mm × Length Max 220mm
- 3 International Adapters
- 4 LP-E6 Battery
- 5 30W power supply
- 6 HPRC1100MEM

HPRC BLACKMAGIC POCKET CAMERA 6K PRO

### TECHNICAL FEATURES


**Dimension:**  
Internal dimension  
377x263,9x150,8(mm) - 14.84x10.39x5.94(in)  
External dimension  
402x330,5x169,2(mm) - 15.83x13.01x6.66(in)

**Weight:**  
empty: 2,23kg - 4.91lbs  
with cubed foam: 2,55kg - 5.62lbs

**Temperature rating:**  
Minimum  
-40°C -40°F  
Maximum  
+80°C +176°F



### TECHNICAL DRAWING

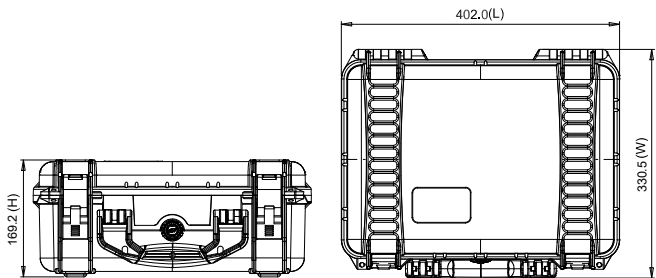

# HPRC2400 COMBO for Blackmagic Pocket Cinema Camera 6K or 4K

## PKTC-2400-01



- 1 Cinema Blackmagic Pocket 4K or 6K with or without professional cage and Metabones mounted
- 2 Lenses: Diameter Max 90mm x Length Max 220mm
- 3 International Adapters
- 4 LP-E6 Battery
- 5 30W power supply
- 6 HPRC1100MEM

### TECHNICAL FEATURES

#### Dimension:

Internal dimension  
377x263,9x150,8(mm) - 14.84x10.39x5.94(in)  
External dimension  
402x330,5x169,2(mm) - 15.83x13.01x6.66(in)

#### Weight:


empty: 2,23kg - 4.91lbs  
with cubed foam: 2,55kg - 5.62lbs

#### Temperature rating:



Minimum Maximum  
-40°C -40°F +80°C +176°F



### TECHNICAL DRAWING

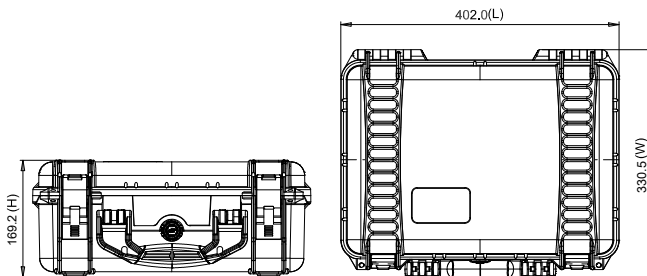

# HPRC5200 for Blackmagic Studio Camera 6K Pro/4K Pro G2/4K Plus S-BMS-5200-01

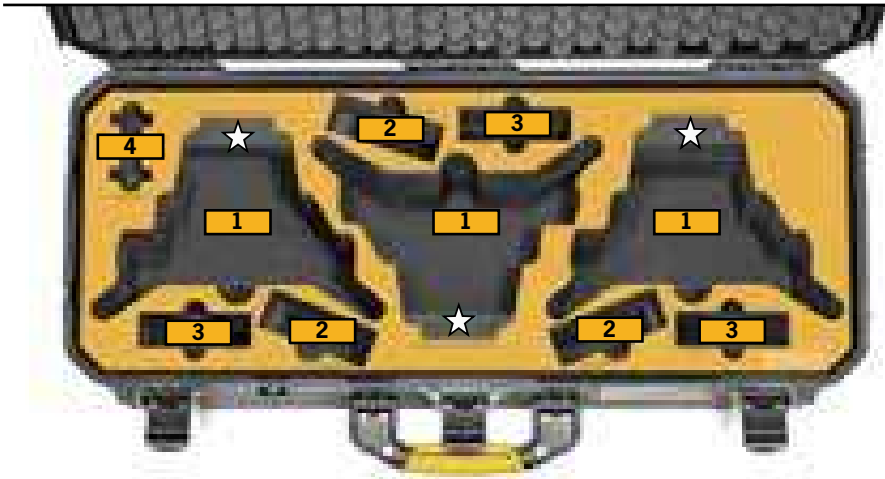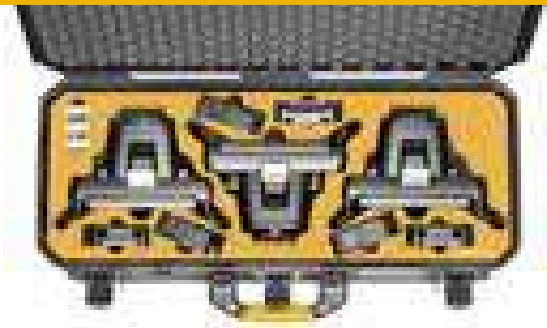

- 1 Blackmagic Studio Camera 6K PRO/4K PRO G2/4K PLUS
- 2 Charger + Adaptor
- 3 Tripod Plate
- 4 3x Camera Numbers



☆ Additional foam inserts for BM Studio Camera 4k PRO G2 / 4K PLUS

## TECHNICAL FEATURES


**Dimension:**  
Internal dimension  
772x302x210(mm) - 30.39x11.89x8.26(in)  
External dimension:  
802x355x246,7(mm) - 31.57x13.97x9.71(in)

**Weight:**  
empty: 5,05kg - 11.10lbs  
with cubed foam: 6,20kg - 13.70lbs

**Temperature rating:**  
Minimum Maximum  
-40°C -40°F +80°C +176°F



## TECHNICAL DRAWING

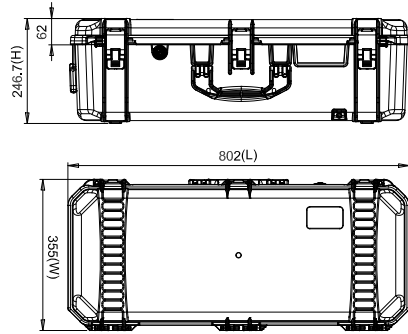

HPRC BLACKMAGIC STUDIO CAMERA 6K PRO/4K PRO G2/4K PLUS

HPRC2760W for Blackmagic Design ATEM  
 Television Studio 4K8 /HD8 /HD8 ISO  
 + ATEM Microphone Converter  
**S-ATS-2760W-01**



- 1 ATEM Television Studio 4K8 / HD8 / HD8 ISO
- 2 ATEM Microphone Converter




HPRC BLACKMAGIC ATEM

**TECHNICAL FEATURES**

**Dimension:**  
 Internal dimension  
 690x450x301(mm) - 27.16x17.72x11.85(in)  
 External dimension:  
 750x511x329(mm) - 29.53x20.12x12.95(in)  
**Weight:**  
 empty: 8,93kg - 19.69lbs  
 with cubed foam: 10,72kg - 23.63lbs  
**Temperature rating:**  
 Minimum Maximum  
 -40°C -40°F +80°C +176°F



**TECHNICAL DRAWING**

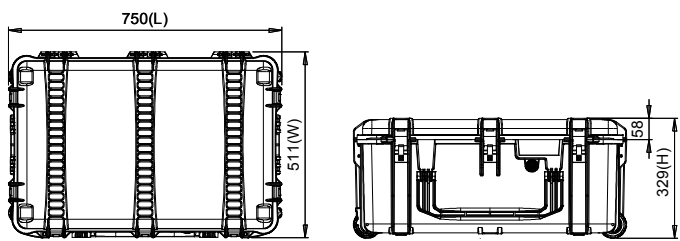

# HPRC2710 for Blackmagic Design ATEM Camera Control Panel

## S-ACCP-2710-01



**1** ATEM Camera Control Panel



### TECHNICAL FEATURES

#### Dimension:

Internal dimension  
555x459x256(mm) - 21.85x18.07x10.08(in)

External dimension:  
617x525x280(mm) - 24.29x20.67x11.02(in)

#### Weight:


empty: 6,56kg - 14.46lbs  
with cubed foam: 7,96kg - 17.55lbs

#### Temperature rating:

Minimum      Maximum  
-40°C -40°F      +80°C +176°F




### TECHNICAL DRAWING

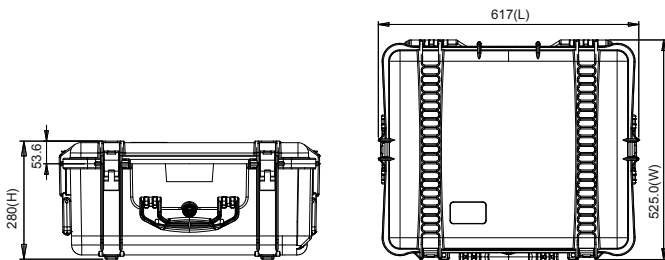

# HPRC2300 for ATEM Mini, ATEM Mini Pro and ATEM Mini Pro ISO

## AMI-2300-01

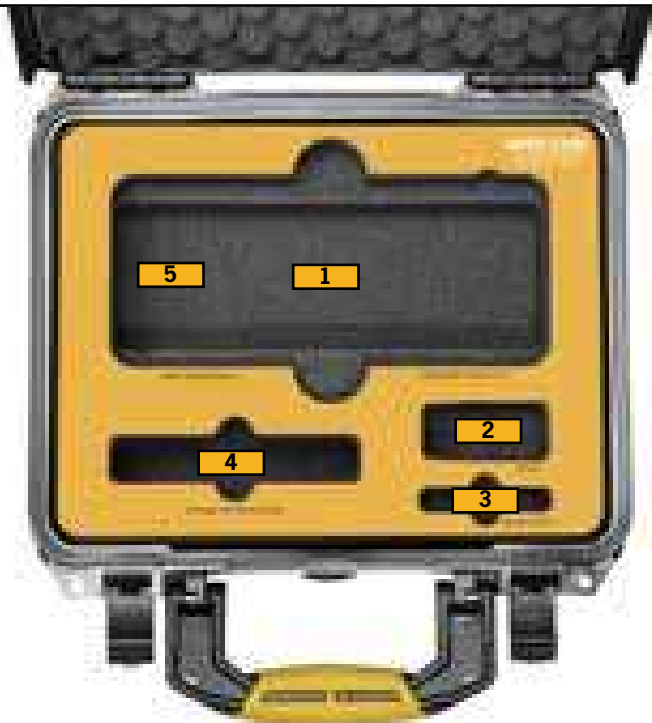

- 1 ATEM Mini/Mini Pro/Mini Pro ISO
- 2 Charger
- 3 Angelbird SSD2GO
- 4 Blackmagic ATEM Streaming Bridge
- 5 HDMI cables/Miscellaneous



### TECHNICAL FEATURES


**Dimension:**  
Internal dimension  
305,7x232,4x137,5(mm) - 12.04x9.15x5.41(in)  
External dimension  
334,6x303x155,2(mm) - 13.17x11.93x6.11(in)

**Weight:**  
empty: 1,75kg - 3.86lbs  
with cubed foam: 1,90kg - 4.19lbs

**Temperature rating:**  
Minimum  
-40°C -40°F  
Maximum  
+80°C +176°F



### TECHNICAL DRAWING

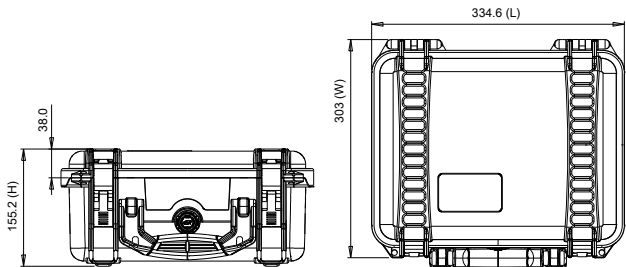

# HPRC2500 for ATEM Mini Extreme and Atem Mini Extreme ISO **AME-2500-01**



- 1 ATEM Mini Extreme/Mini Extreme ISO
- 2 Miscellaneous
- 3 Charger
- 4 Blackmagic ATEM Streaming Bridge
- 5 Angelbird SSD2GO
- 6 HDMI cables/Miscellaneous



## TECHNICAL FEATURES


**Dimension:**  
 internal dimension  
 449,8x322,9x174,9(mm) - 17.71x12.71x6.89(in)  
 external dimension  
 478,1x389,4x194(mm) - 18.82x15.33x7.64(in)

**Weight:**  
 empty: 3,08kg - 6.79lbs  
 with cubed foam: 3,71kg - 8.18lbs

**Temperature rating:**  
 Minimum      Maximum  
 -40°C -40°F      +80°C +176°F



## TECHNICAL DRAWING

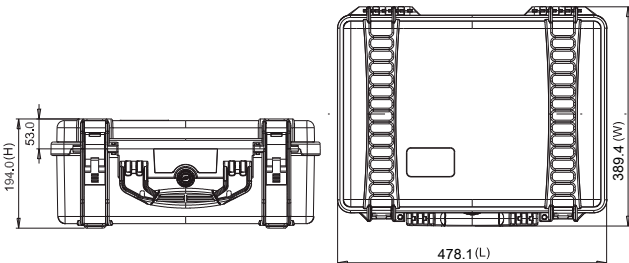

# HPRC2710 for Blackmagic Atem 1 M/E ADV1-2710-01



Blackmagicdesign



**1** Blackmagic Design Atem 1 M/E Advanced Panel

## TECHNICAL FEATURES


**Dimension:**  
 internal dimension  
 555x459x256(mm) - 21.85x18.07x10.08(in)  
 external dimension  
 617x525x280(mm) - 24.29x20.67x11.02(in)

**Weight:**  
 empty: 6,43 kg - 14.18 lbs  
 with foam: 7,45 kg - 16.42 lbs

**Temperature rating:**  
 Minimum            Maximum  
 -40°C -40°F        +80°C +176°F



## TECHNICAL DRAWING

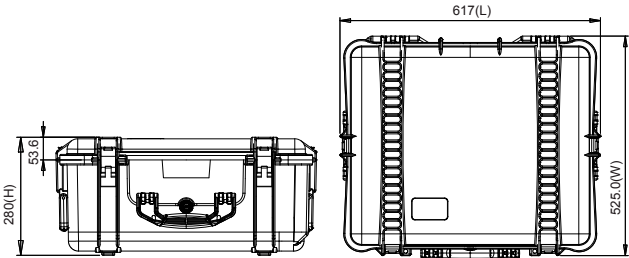


# HPRC2730W for Blackmagic Ursa Mini Pro/Broadcast URS2730W-03



Blackmagicdesign ■ **FOR URSA MINI PRO**  
■ **and URSA BROADCAST**



- 1 BlackMagic Ursa Mini Pro / Broadcast with shoulder pad and top handle mounted
- 2 Tripod Plate
- 3 Shoulder Mount kit - Rods clamps
- 4 Batteries
- 5 Lens
- 6 Accessories / Cables
- 7 HPRC1100 Memory card holder for CFast/SDHC cards
- 8 Charger standard and Charger SWIT S-3802S



HPRC BLACKMAGIC URSA MINI PRO

## TECHNICAL FEATURES


**Dimension:**  
 internal dimension  
 503x459x316(mm) - 19.80x18.07x12.44(in)  
 external dimension  
 616,9x531x349,6(mm) - 24.29x20.91x13.76(in)

**Weight:**  
 empty: 8,41kg - 18.54lbs  
 with cubed foam: 10,43kg - 22.99lbs

**Temperature rating:**  
 Minimum                      Maximum  
 -40°C -40°F                      +80°C +176°F



## TECHNICAL DRAWING

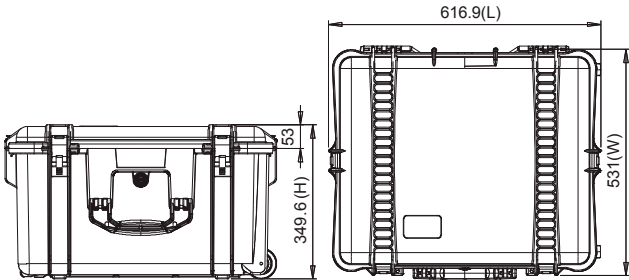



SONY

HPRC READY MADE SOLUTIONS – 2023


# HPRC2460 for Sony Alpha 7 ALP2460-01



HPRC2460 for ALPHA 7 is a special edition, designed to safely carry your SONY Alpha Series.



- 1** Sony A7/A7R/A7S/A7II/A7RII/A7SII / A7SIII / a6300/ Alpha 1 with or without professional cage and lenses mounted (EF/F/PL-Mount/Leica R)
- 2** Lenses: Sony FE 50/1.4, 50/2,8 Macro, 24-70/2.8 G, 85/1,4 G, 16-35/4, 24-70/4, 28-70/3.5-5.6, 28/2.0 - SONY ZA 35/2.8, 35/1.4, 50/1.4, 50/1,8 55/1.8/ 10-18/4 - Zeiss Loxia 21/2.8, 35/2.0, 50/2.0
- 3** Battery chargers, cables
- 4** Accessories (baseplate, rods, top grip handles, lockports, cables, batteries, controllers, GoPro)
- 5** external recorder Atomos/Sound Device etc

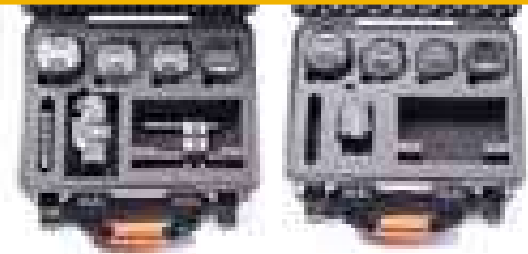

## TECHNICAL FEATURES


**Dimension:**  
 internal dimension  
 409x306x175(mm) - 16.1x12.05x6.89(in)  
 external dimension  
 435x377,8x193(mm) - 17.13x14.87x7.60(in)

**Weight:**  
 empty: 2,57kg - 5.65lbs  
 with cubed foam: 2,97kg - 6.55lbs

**Temperature rating:**  
 Minimum      Maximum  
 -40°C -40°F      +80°C +176°F



## TECHNICAL DRAWING

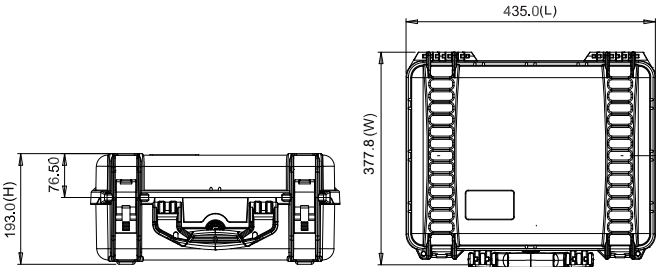

# HPRC2400 for Sony FX3 FX3-2400-01



- 1 Sony FX3
- 2 Lenses: Diameter Max 90mm × Length Max 220mm
- 3 XLR Handle Unit
- 4 Battery Charger BC-QZ1
- 5 Battery NP-FZ100
- 6 Cable



## TECHNICAL FEATURES


**Dimension:**  
 Internal dimension  
 377x263,9x150,8(mm) - 14.84x10.39x5.94(in)  
 External dimension  
 402X330,5X169,2(mm) - 15.83x13.01x6.66(in)

**Weight:**  
 empty: 2,49kg - 5.48lbs  
 with cubed foam: 3,20kg - 7.04lbs


**Temperature rating:**  
 Minimum Maximum  
 -40°C -40°F +80°C +176°F



## TECHNICAL DRAWING

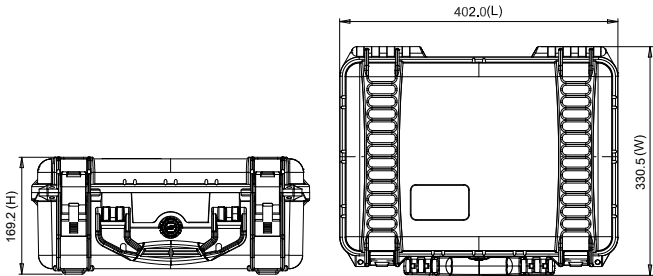

# HPRC2550W for Sony ILME-FX6 FX6-2550W-01

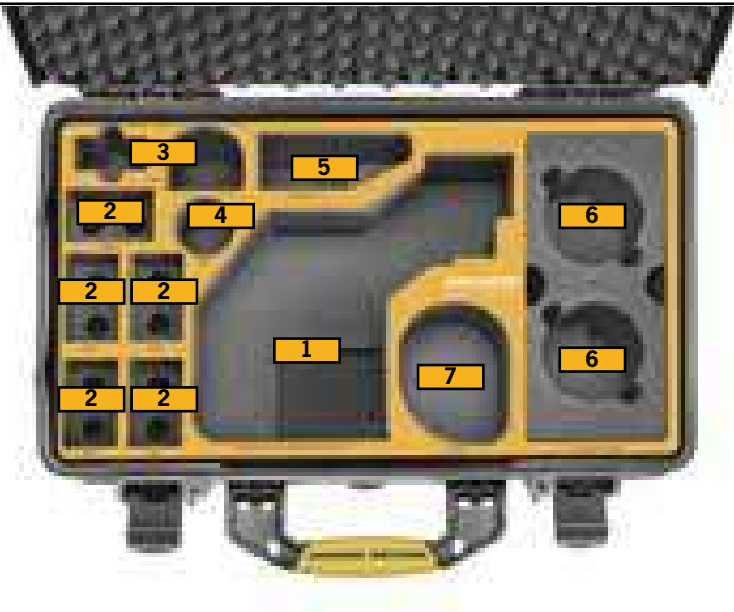

- 1 Sony ILME-FX6 Cinema Line + Smart Handle
- 2 BP-U35 or BP-U100 Battery
- 3 Charger
- 4 Cables
- 5 LCD Monitor 3,5"
- 6 2x Lenses GM or x Tele GM
- 7 Smart Grip



## TECHNICAL FEATURES


**Dimension:**  
 internal dimension  
 513x288x200(mm) - 20.19x11.34x7.87(in)  
 external dimension  
 549x346x236(mm) - 21.61x13.62x9.29(in)

**Weight:**  
 empty: 4,35kg - 9.57lbs  
 with foam: 5,04kg - 11.10 lbs

**Temperature rating:**  
 Minimum Maximum  
 -40°C -40°F +80°C +176°F



## TECHNICAL DRAWING

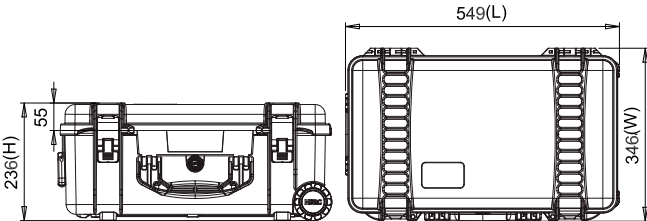

HPRC SONY ILME-FX6

# HPRC2700W for Sony PXW-FX9 FX9-2700W-01



**SONY**  
 PXW-FX9



- 1 Sony Camcorder
- 2 Viewfinder LCD
- 3 External Microphone
- 4 Battery Sony BP-U Series
- 5 Lens Adapter Metabones
- 6 Sony XQD/SD Card
- 7 Canon CNE Prime Lens
- 8 Cine Lenses up to 105mm Ø
- 9 Photo Lenses up to 105mm Ø
- 10 Hand Grip
- 11 Cable
- 12 Charger
- 13 HPRC1100 MEMBLB




## TECHNICAL FEATURES

**Dimension:**  
 Internal dimension  
 554,7x458,7x246(mm) - 21.84x18.06x9.69(in)  
 External dimension  
 617,5x527,3x279,6(mm) - 24.31x20.76x11.0(in)  
**Weight:**  
 empty: 7,75kg - 17.09lbs  
 with cubed foam: 9,07kg - 19.99lbs  
**Temperature rating:**  
 Minimum Maximum  
 -40°C -40°F +80°C +176°F



## TECHNICAL DRAWING

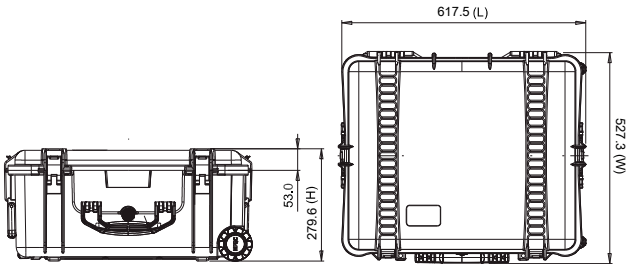

 READY



# HPRC2600W for Sony PXW-Z280 Z280-2600W-01



- 1 Sony Camcorder PXW-Z280
- 2 Cables/Accessories/Miscellaneous
- 3 Battery Sony BPU – U60
- 4 Compact 4K Wide Conversion
- 5 Microphone



## TECHNICAL FEATURES


**Dimension:**  
 Internal dimension  
 482,4x358,3x217,6(mm) - 18.99x14.1x8.57(in)  
 External dimension  
 546,9x426,8x250,7(mm) - 21.53x16.8x9.87(in)

**Weight:**  
 empty: 6,05kg - 13.34lbs  
 with cubed foam: 6,97kg - 15.37lbs

**Temperature rating:**  
 Minimum  
 -40°C -40°F  
 Maximum  
 +80°C +176°F



## TECHNICAL DRAWING

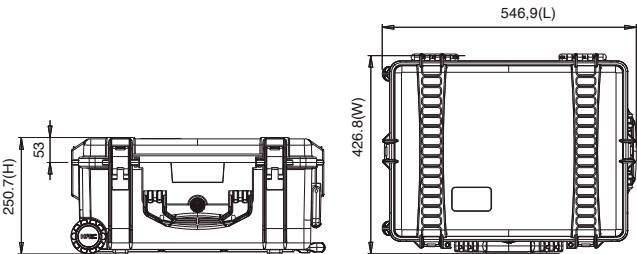

# HPRC2700W for Sony PXW-Z190V

## Z190-2700W-01



**SONY**  
PXW-Z190V



- 1 Sony Camcorder PXW-Z190VC
- 2 BC-U1 battery charger
- 3 Battery Sony BPU \Swit S-8U63
- 4 Microphone
- 5 Wireless Audio Set Sony UWP-D11/K51PRO
- 6 Cables/Accessories/Miscellaneous



### TECHNICAL FEATURES


**Dimension:**  
Internal dimension  
554,7x458,7x246(mm) - 21.84x18.06x9.69(in)  
External dimension  
617,5x527,3x279,6(mm) - 24.31x20.76x11.0(in)

**Weight:**  
empty: 7,75kg - 17.09lbs  
with cubed foam: 9,07kg - 19.99lbs

**Temperature rating:**  
Minimum Maximum  
-40°C -40°F +80°C +176°F



### TECHNICAL DRAWING

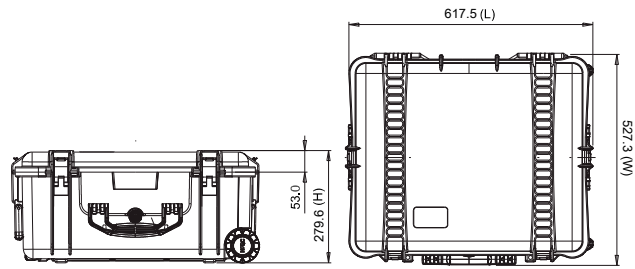

HPRC SONY PXWZ190V



CANON

HPRC READY MADE SOLUTIONS – 2023

# HPRC2300 for Canon Eos R5 / R6

## CR5-2300-01



- 1 Canon EOS R5 / R6 Mirrorless Digital Camera (with or without professional cage)
- 2 Lenses: Diameter Max 90mm x Length Max 220mm
- 3 Cable/Miscellaneous
- 4 LC-E6 Charger for LP-E6 Battery Pack
- 5 LP-E6NH Lithium-Ion Battery (7.2V, 2130mAh)



### TECHNICAL FEATURES


**Dimension:**  
Internal dimension  
305,7x232,4x137,5(mm) - 12.04x9.15x5.41(in)  
External dimension  
334,6x303x155,2(mm) - 13.17x11.93x6.11(in)

**Weight:**  
empty: 1,75kg - 3.86lbs  
with cubed foam: 1,90kg - 4.19lbs

**Temperature rating:**  
Minimum Maximum  
-40°C -40°F +80°C +176°F



### TECHNICAL DRAWING

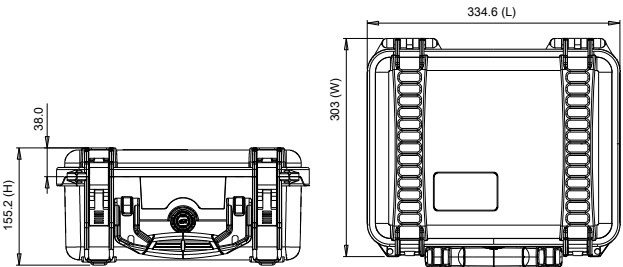

# HPRC2700W for Canon EOS C300 Mark III / EOS C500 Mark II **C300-2700W-01**



- 1 EOS C300 Mark III / EOS C500 Mark II Body
- 2 Lens CN-E18-80
- 3 Lens 110/90 mm diameter, depth 180mm
- 4 Monitor
- 5 Handle
- 6 Charger
- 7 Various/Cable
- 8 Battery BP-A30/BP-A60
- 9 Charger
- 10 HPRC1100MEM



## TECHNICAL FEATURES


**Dimension:**  
 Internal dimension  
 554,7x458,7x246(mm) - 21.84x18.06x9.69(in)  
 External dimension  
 617,5x527,3x279,6(mm) - 24.31x20.76x11.0(in)

**Weight:**  
 empty: 7,75kg - 17.09lbs

**Temperature rating:**  
 Minimum                      Maximum  
 -40°C -40°F                      +80°C +176°F



## TECHNICAL DRAWING

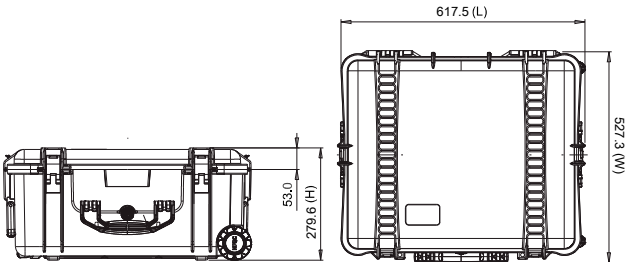

# HPRC2600 for Canon Eos C70

## C70-2600-01



- 1 Canon Eos C70
- 2 Batteries BP-A60/BP-A30
- 3 Lens Canon RF 24-105 or similar
- 4 Lens Canon RF 15-35 or similar
- 5 Lens Canon RF 70-200 or similar
- 6 Lens Canon RF 24-70 or similar
- 7 Canon Adapter EF-RF 0.71x
- 8 HPRC1300MEMBLB
- 9 CA-CP200L
- 10 Miscellaneous
- 11 Battery Charger CG-A20 OTH
- 12 Handle unit



HPRC CANON EOS C70

### TECHNICAL FEATURES


**Dimension:**  
internal dimension  
482,4x358,3x198,1(mm) - 18.99x14.1x7.8(in)  
external dimension  
543,4x426,8x218,1(mm) - 21.39x16.8x8.59(in)

**Weight:**  
empty: 4,25kg - 9.37lbs  
with cubed foam: 5,05kg - 11.13lbs

**Temperature rating:**  
Minimum Maximum  
-40°C -40°F +80°C +176°F



### TECHNICAL DRAWING

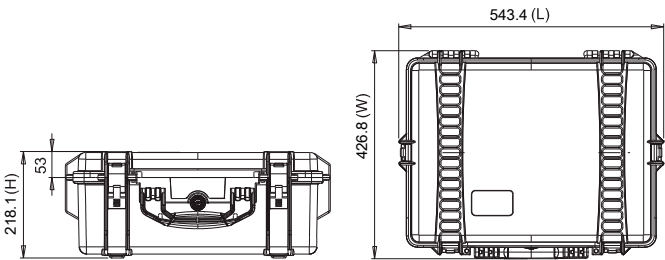

# HPRC2600 for Canon Eos C200

## C200-2600-01



- 1 Canon Eos C200 With Camera Grip Mounted
- 2 Handle Unit Hdu-2
- 3 Monitor Lcd Lm-V1, Lcd La-V1
- 4 Compact Power Adaptor Ca-A10
- 5 Compact Adaptor Cp200b
- 6 Lenses Ef85mm/16-35/24-70/24-105Mm
- 7 HPRC1100MEM
- 8 Battery Pack A30/A60
- 9 Battery Charger A-20
- 10 Miscellaneous Accessories
- 11 Screw
- 12 Allen Key



### TECHNICAL FEATURES


**Dimension:**  
internal dimension  
482,4x358,3x198,1(mm) - 18.99x14.1x7.8(in)  
external dimension  
543,4x426,8x218,1(mm) - 21.39x16.8x8.59(in)

**Weight:**  
empty: 4,31kg - 9.50lbs  
with cubed foam: 4,84kg - 10.663lbs

**Temperature rating:**  
Minimum Maximum  
-40°C -40°F +80°C +176°F



### TECHNICAL DRAWING

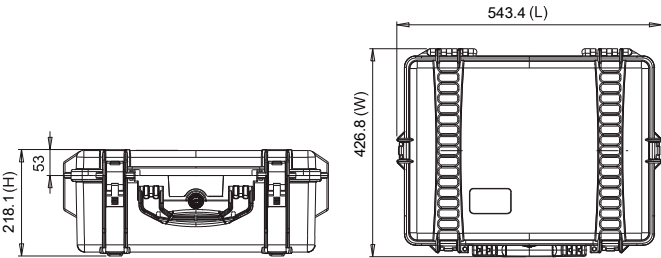

# HPRC2600 for Canon Eos C100

## C100-2600-01



- 1 Canon Eos C100 With Viewfinder and Camera Grip Mounted
- 2 Handle Unit
- 3 Lenses Ef85mm/16-35/24-70/24-105Mm
- 4 Battery Pack Bp 955
- 5 Battery Pack Bp 975
- 6 Battery Charger Cg-940
- 7 Compact Adaptor Ca-941
- 8 Miscellaneous Accessories
- 9 HPRC1100MEM



### TECHNICAL FEATURES


**Dimension:**  
internal dimension  
482,4x358,3x198,1(mm) - 18.99x14.1x7.8(in)  
external dimension  
543,4x426,8x218,1(mm) - 21.39x16.8x8.59(in)

**Weight:**  
empty: 4,25kg - 9.37lbs  
with cubed foam: 5,05kg - 11.13lbs

**Temperature rating:**  
Minimum Maximum  
-40°C -40°F +80°C +176°F



### TECHNICAL DRAWING

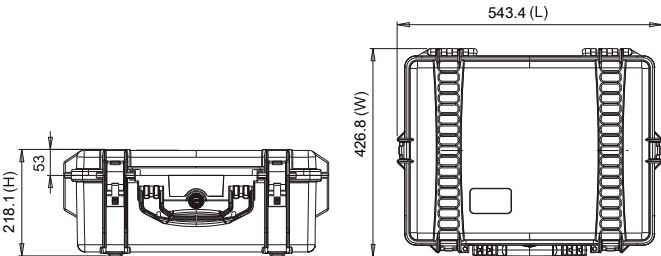





MOZA

HPRC READY MADE SOLUTIONS – 2023

# HPRC2530 for Moza Air2 Ifocus

## MAIR2-2530-01

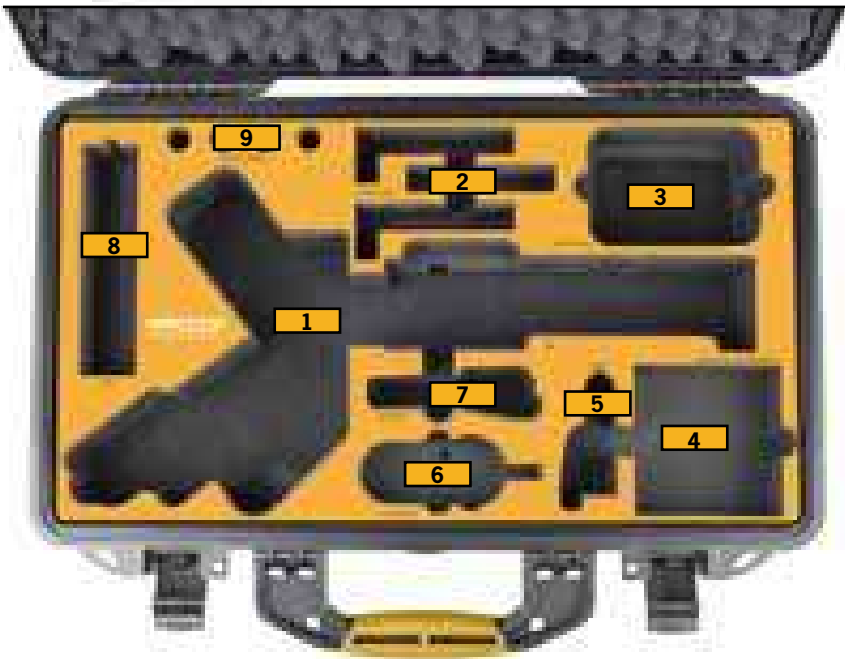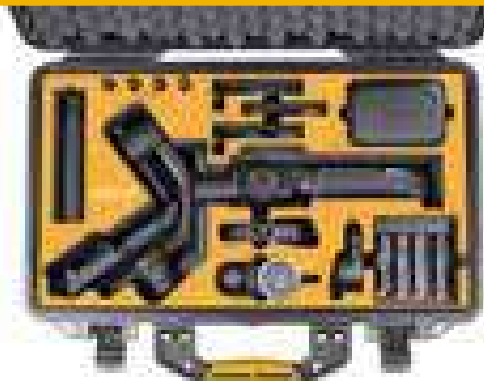

- 1 Gimbal
- 2 Quick Release Plate
- 3 Cable storage bag
- 4 Intelligent Charger and 18650 batteries
- 5 Ifocus M
- 6 Ifocus Handunit
- 7 Ifocus Motor
- 8 Tripod
- 9 Follow focus install pipe



### TECHNICAL FEATURES


**Dimension:**  
internal dimension 513x288x132(mm) - 20.20x11.34x5.20(in)  
external dimension 540x350x153(mm) - 21.26x13.78x6.02(in)

**Weight:**  
empty: 3,20kg - 7.05lbs  
with cubed foam: 3,26kg - 7.19lbs

**Temperature rating:**  
Minimum -40°C -40°F  
Maximum +80°C +176°F



### TECHNICAL DRAWING

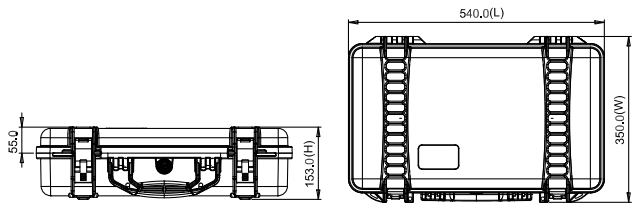




## ZHIYUN CRANE



HPRC READY MADE SOLUTIONS – 2023

# HPRC2700W for Zhiyun Crane 3S Pro

## CR3SP-2700W-01

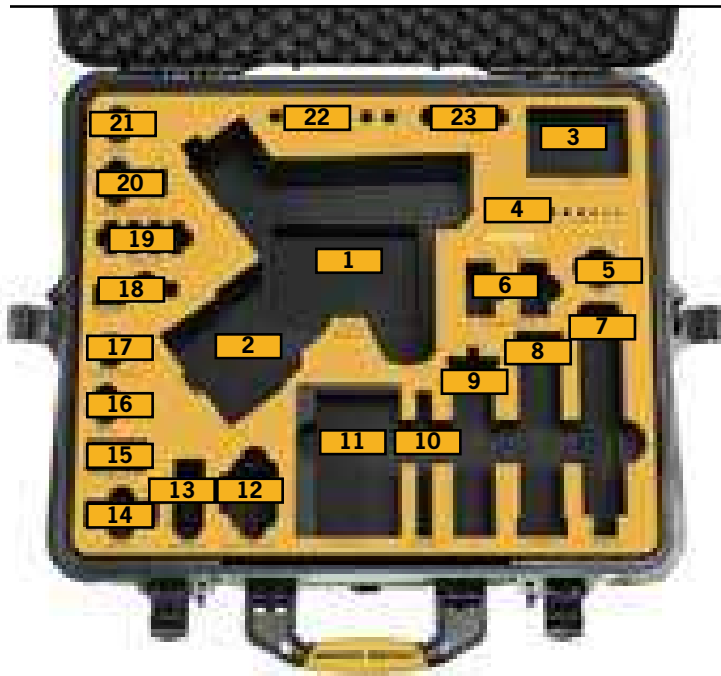

- 1 Crane 3S Gimbal
- 2 Various/Miscellaneous
- 3 Cables
- 4 Allen Keys
- 5 Charger
- 6 TransMount Servo Zoom/Focus Motor
- 7 SmartSling Handle
- 8 EasySling Handle
- 9 Tripod
- 10 Quick Release Plate
- 11 Various/Miscellaneous
- 12 TransMount PowerPlus Battery Pack
- 13 TransMount Phone Holder
- 14 Battery Charger
- 15 Lens Support
- 16 Extension Arm
- 17 SmartSling Handle Adapter Base
- 18 V-Lock Wedge Mount
- 19 Support for Lens Tube
- 20 TransMount Image Transmission Transmitter
- 21 Backing Base
- 22 Lens Support Tube
- 23 Li-ion Batteries



### TECHNICAL FEATURES


**Dimension:**  
Internal dimension  
554,7x458,7x246(mm) - 21.84x18.06x9.69(in)  
External dimension  
617,5x527,3x279,6(mm) - 24.31x20.76x11.0(in)

**Weight:**  
empty: 7,75kg - 17.09lbs  
with cubed foam: 9,07kg - 19.99lbs

**Temperature rating:**  
Minimum Maximum  
-40°C -40°F +80°C +176°F




### TECHNICAL DRAWING

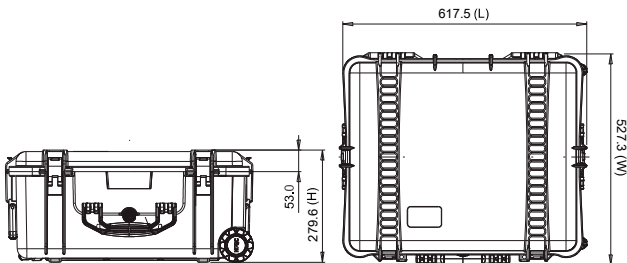

# HPRC2700W for ZHIYUN Crane 3 Lab

## Master package

### CR3-2700W-01

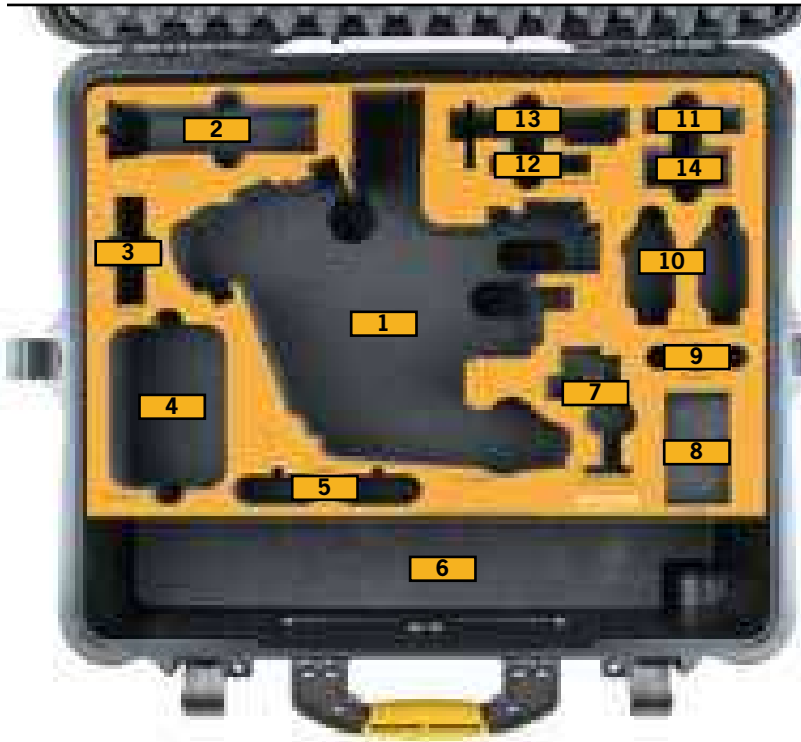

- 1 Crane 3 Lab Stabilizer
- 2 Handheld Tripod
- 3 Battery Charger
- 4 Cable Storage Case
- 5 Quick Setup Kits
- 6 Telescopic Monopod with Locking Buckle and Multifunctional Camera Belt
- 7 Phone Holder with Crown Gear
- 8 Miscellaneous
- 9 Batteries 18650
- 10 Focus and Zoom Combo Kits
- 11 Cable
- 12 Quick Release Base Plate
- 13 Quick Release Plate
- 14 HPRC1100 (not included)



#### TECHNICAL FEATURES


**Dimension:**  
Internal dimension  
554,7x458,7x246(mm) - 21.84x18.06x9.69(in)  
External dimension  
617,5x527,3x279,6(mm) - 24.31x20.76x11.0(in)

**Weight:**  
empty: 7,74kg - 17.06lbs  
with cubed foam: 8,84kg - 19.49lbs

**Temperature rating:**  
Minimum Maximum  
-40°C -40°F +80°C +176°F



#### TECHNICAL DRAWING

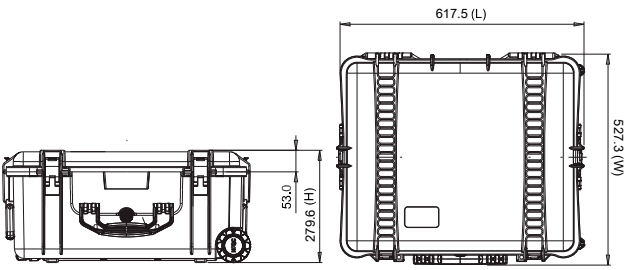

# HPRC2600W for ZHIYUN

## Crane 3 Lab

### CR3-2600W-01



- 1 Crane 3 Lab Stabilizer
- 2 TransMount Handheld Tripod
- 3 Battery Charger
- 4 Batteries 18650
- 5 Cable Storage Case
- 6 Quick Release Plate
- 7 TransMount Phone Holder



HPRC ZHIYUN CRANE 3

#### TECHNICAL FEATURES


**Dimension:**  
Internal dimension  
482,4x358,3x217,6(mm) - 18.99x14.1x8.57(in)  
External dimension  
546,9x426,8x250,7(mm) - 21.53x16.8x9.87(in)

**Weight:**  
empty: 6,05kg - 13.34lbs  
with cubed foam: 6,97kg - 15.37lbs

**Temperature rating:**  
Minimum -40°C -40°F  
Maximum +80°C +176°F



#### TECHNICAL DRAWING

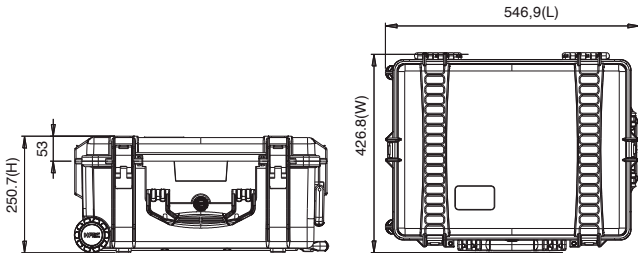



**Z CAM**

HPRC READY MADE SOLUTIONS – 2023

# HPRC2400 for Z CAM E2-F6 Full Frame 6K Cinema Camera

## ZE2F6-2400-01



- 1 Z CAM E2-F6 Full Frame 6K Cinema Camera with SmallRig Cage mounted
- 2 Alternative Lens Mount
- 3 Accessories
- 4 Charger
- 5 Cable
- 6 NF-P Battery
- 7 CFast 2.0
- 8 WiFi Antenna



### TECHNICAL FEATURES

#### Dimension:

Internal dimension  
377x263,9x150,8(mm) - 14.84x10.39x5.94(in)  
External dimension  
402X330,5X169,2(mm) - 15.83x13.01x6.66(in)

#### Weight:


empty: 2,23kg - 4.91lbs  
with cubed foam: 2,49kg - 5.49lbs

#### Temperature rating:

Minimum Maximum  
-40°C -40°F +80°C +176°F



### TECHNICAL DRAWING

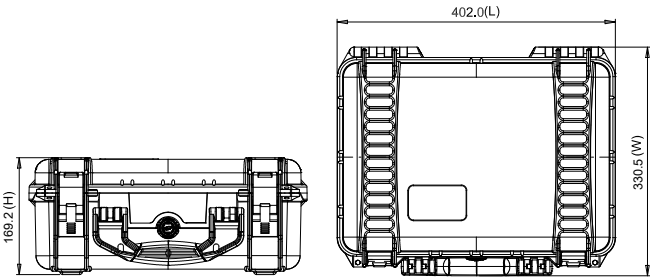



FUJIFILM

HPRC READY MADE SOLUTIONS – 2023

# HPRC2500 for Fujifilm GFX100

## GFX100-2500-01



- 1 Fujifilm GFX100
- 2 Cable storage/Miscellaneous
- 3 Adjustable lens: FUJIFILM GF 110mm f/2 R LM WR Lens, 23mm f/4 R LM WR Lens, 45mm f/2.8 R WR Lens, 32-64mm f/4 R LM WR Lens
- 4 Battery charger
- 5 Battery NP-T125
- 6 Ac Power Adapter



HPRC FUJIFILM GFX100

### TECHNICAL FEATURES


**Dimension:**  
internal dimension  
449,8x322,9x174,9(mm) - 17.71x12.71x6.89(in)  
external dimension  
478,1x389,4x194(mm) - 18.82x15.33x7.64(in)

**Weight:**  
empty: 3,22kg - 7.10lbs  
with cubed foam: 3,75kg - 8.27lbs

**Temperature rating:**  
Minimum -40°C -40°F  
Maximum +80°C +176°F



### TECHNICAL DRAWING

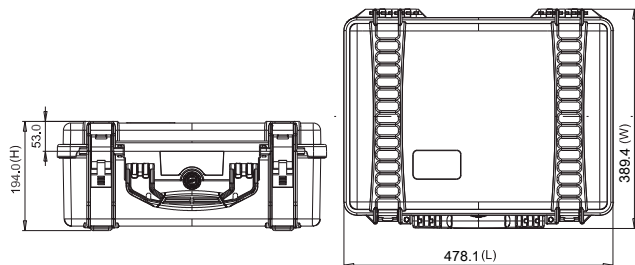




RED

HPRC READY MADE SOLUTIONS – 2023

# HPRC2730W for Red Ranger Gemini RGE-2730W-01

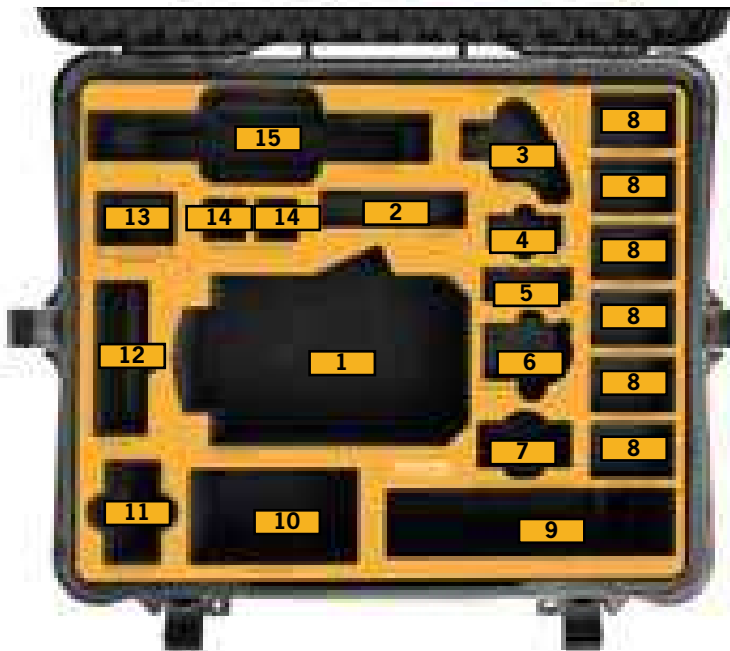

- 1 Camera with Top Handle
- 2 HPRC1300 MEVBLB
- 3 Right Side Wooden Handle 2.0 with R/S Button - Tilta
- 4 Red Mini Mag
- 5 Cable
- 6 Red Bomb EVF DSMC
- 7 Titan Support Arm with Single 1/4" QR Bracket – Monitor Side
- 8 GDU 98Wh Mini V-Lock Battery
- 9 Cable
- 10 BlueShape Travel Charger
- 11 Red Ranger Ac Power Adaptor
- 12 DSMC2 Red Touch 7.0" LCD
- 13 Smallrig for monitor LCD EVF Mount/BMVA/SmallHD, Zacuto Gratical HD1938
- 14 Smallrig Rosette Arm Handle for Shoulder Stabilizer
- 15 Quick Release Platform



HPRC RED RANGER GEMINI

## TECHNICAL FEATURES


**Dimension:**  
 internal dimension  
 503x459x316(mm) - 19.80x18.07x12.44(in)  
 external dimension  
 616,9x531x349,6(mm) - 24.29x20.91x13.76(in)

**Weight:**  
 empty: 8,41kg - 18.54lbs  
 with cubed foam: 10,43kg - 22.99lbs

**Temperature rating:**  
 Minimum Maximum  
 -40°C -40°F +80°C +176°F



## TECHNICAL DRAWING

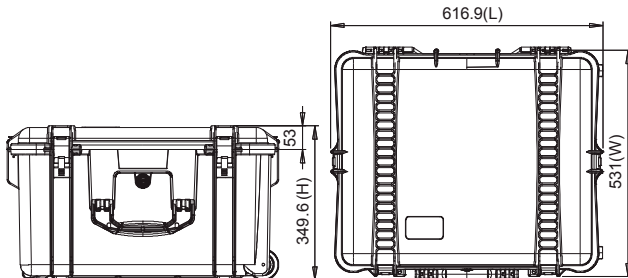



NIKON

HPRC READY MADE SOLUTIONS – 2023

# HPRC2460 for Nikon D850

## D850-2460-01



for **NIKON D850**



- 1** D850 Camera Body
- 2** Additional EN-EL15a Rechargeable Li-ion Battery
- 3** ME-W1 Wireless Microphone
- 4** ME-1 Stereo Microphone
- 5** Atomos Ninja Flame
- 6** Lenses: AF-S NIKKOR 35mm f/1,8G ED / AF-S NIKKOR 85mm f/1.8G / AF-S NIKKOR 20mm f/1,8G ED
- 7** MH-25A Battery Charger/ UC-E22 USB Cable / Coiled HDMI Cable

HPRC NIKON D850

### TECHNICAL FEATURES


**Dimension:**  
internal dimension  
409x306x175(mm) - 16.1x12.05x6.89(in)  
external dimension  
435x377,8x193(mm) - 17.13x14.87x7.60(in)

**Weight:**  
empty: 2,55kg - 5.62lbs  
with cubed foam: 3,14kg - 6.92lbs

**Temperature rating:**  
Minimum      Maximum  
-40°C -40°F      +80°C +176°F



### TECHNICAL DRAWING

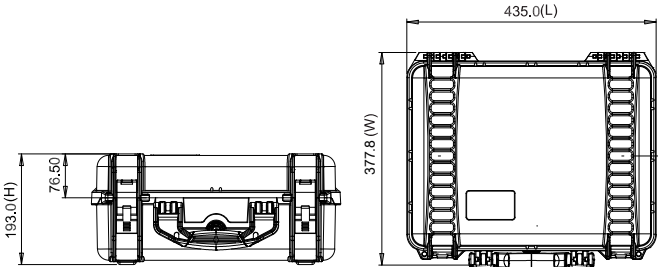

A Panasonic GH5 camera is shown in the foreground, with its lens cap removed, revealing a green-tinted lens. Behind it is a black, ruggedized GH5 weather-sealed case with a textured, ribbed exterior. A yellow label on the case reads "HPRC GH5". The background is a dark, textured surface.

PANASONIC

HPRC READY MADE SOLUTIONS – 2023

# HPRC2460 for Panasonic GH5 S-GH52460-01



HPRC2460 for PANASONIC GH5 is a special edition, designed to safely carry your GH5 Lumix G Series.



- 1 PANASONIC GH5 with or without professional cage and lenses mounted
- 2 Lenses: lumix g 8mm f3,5 (fisheye) hd, lumix dg summilux 12 f1.4, lumix g pancake 14mm f2.5, leica dg summilux 15mm /f1,7 asph, lumix g 20mm f1,7 (asph), leica dg summilux 25mm f1,4 (asph), lumix g 25mm f1.7 asph., lumix g 30mm macro f2,8, leica dg nocticron 42,5 mm f 1,2 (asph) hd, lumix g dg 1,7 / 42,5mm asph/power o.i.s., leica dg macro-elmarit 45mm f2,8 (asph), lumix g vario 7-14mm f4,0 (asph) hd, leica dg vario elmarit 8-18, lumix g vario 12-32mm f3.5-f5.6 (asph) hd, lumix g x vario 12-35mm f2,8 (asph) hd, lumix g x vario 12-35 ii, leica dg vario elmarit 12-60, lumix g vario 12-60, lumix g vario 14-42mm f3,5-5,6 (asph) hd, lumix g vario 14-42mm f3,5-5,6 (asph) hd, lumix g x vario pz 14-42mm f3,5-5,6 (asph), lumix g vario 14-42mm f3,5-5,6 (asph) hd, lumix g x vario pz 14-42mm f3,5-5,6 (asph), lumix g vario 14-45mm f3,5-5,6 (asph) hd, lumix g x vario 35-100mm f2,8 hd, lumix g x vario 35-100 ii, lumix g vario 35-100mm f4,0-5,6, lumix g vario 45-200 ii, lumix g 12,5mm f12,5 3d
- 3 Battery chargers, cables
- 4 Accessories (baseplate, rods, top grip handles, lockports, cables, batteries, controllers, GoPro)
- 5 External recorder Atomos/Sound Device etc

## TECHNICAL FEATURES


**Dimension:**  
 internal dimension  
 409x306x175(mm) - 16.1x12.05x6.89(in)  
 external dimension  
 435x377,8x193(mm) - 17.13x14.87x7.60(in)

**Weight:**  
 empty: 2,55kg - 5.62lbs  
 with cubed foam: 3,14kg - 6.92lbs

**Temperature rating:**  
 Minimum Maximum  
 -40°C -40°F +80°C +176°F



## TECHNICAL DRAWING

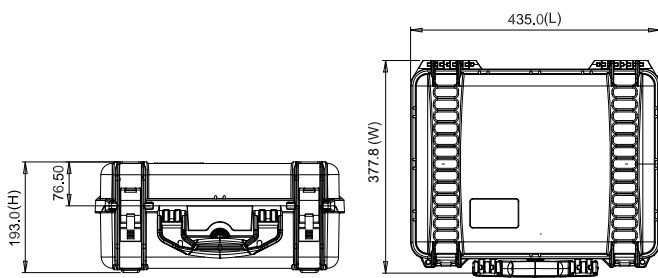

HPRC PANASONIC GH5



LEICA

Leica

LEICA

HPRC READY MADE SOLUTIONS – 2023

# HPRC2400 for Leica M

## LEM2400-01



FOR LEICA M



- 1 1 x Leica M Camera Body with Lens Attached
- 2 Electronic Viewfinder
- 3 4 x Lens
- 4 Charger
- 5 Spare Battery
- 6 Cables/Miscellaneous

### TECHNICAL FEATURES


**Dimension:**  
Internal dimension  
377x263,9x150,8(mm) - 14,84x10,39x5,94(in)  
External dimension  
402X330,5X169,2(mm) - 15.83x13.01x6.66(in)

**Weight:**  
empty: 2,38kg - 5.25lbs

**Temperature rating:**  
Minimum      Maximum  
-40°C -40°F      +80°C +176°F



### TECHNICAL DRAWING

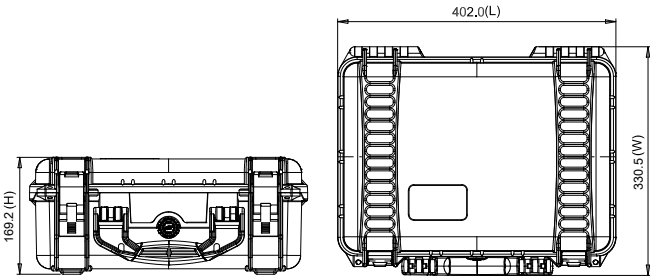

# HPRC2460 for Leica M

## LEM2460-01



- 1 2 x Leica M Camera Body with Lens Attached
- 2 2 x Electronic Viewfinder
- 3 2 x Spare Batteries
- 4 4 x Lens
- 5 2 x Charger
- 6 Cables/Miscellaneous

### TECHNICAL FEATURES


**Dimension:**  
internal dimension  
409x306x175(mm) - 16.1x12.05x6.89(in)  
external dimension  
435x377,8x193(mm) - 17.13x14.87x7.60(in)

**Weight:**  
empty: 2,55kg - 5.62lbs  
with cubed foam: 3,14kg - 6.92lbs

**Temperature rating:**  
Minimum Maximum  
-40°C -40°F +80°C +176°F



### TECHNICAL DRAWING

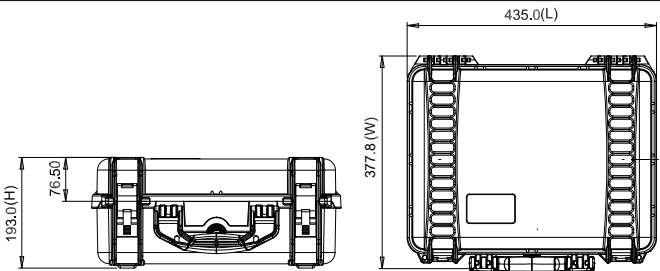






APPLE

HPRC READY MADE SOLUTIONS – 2023

# HPRC2530 for Apple Mac Studio / Mac Mini

## STU-2530-01

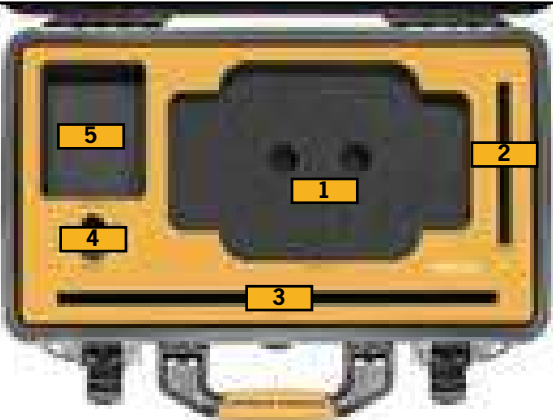

- 1 Mac Studio / Mac Mini
- 2 Magic Trackpad
- 3 Magic Keyboard
- 4 Magic Mouse
- 5 Cable/Miscellaneous



### MAC STUDIO LAYOUT

Just remove the additional foam **2** from the main slot **1**.  
The case is ready to house and protect your Mac Studio.



### MAC MINI LAYOUT

Keep the additional foam **2** in the main slot **1**.  
Your Mac Mini can be placed above. Safe and sound.



## TECHNICAL FEATURES


**Dimension:**  
Internal dimension:  
513x288x132(mm) - 20.20x11.34x5.20(in)  
External dimension:  
540x350x153(mm) - 21.26x13.78x6.02(in)

**Weight:**  
empty: 3,20kg - 7.05lbs  
with cubed foam: 3,26kg - 7.19lbs

**Temperature rating:**  
Minimum      Maximum  
-40°C -40°F      +80°C +176°F




## TECHNICAL DRAWING

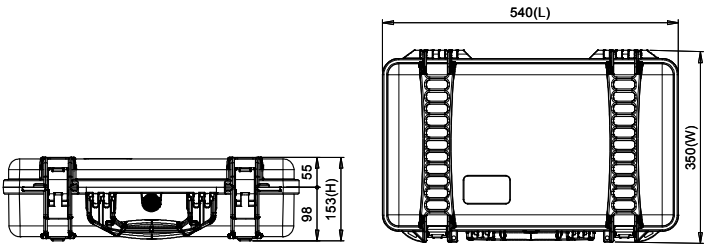

HPRC APPLE MAC STUDIO / MAC MINI

# HPRC2530 for MacBook Pro 16” MPRO-2530-01

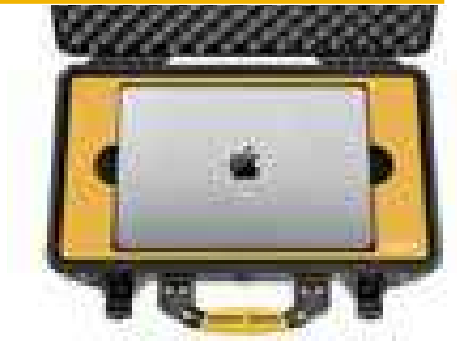

- 1 MacBook Pro 16"
- 2 Miscellaneous



HPRC APPLE MACBOOK PRO 16"

## TECHNICAL FEATURES


**Dimension:**  
Internal dimension  
513x288x132(mm) - 20.20x11.34x5.20(in)  
External dimension  
540x350x153(mm) - 21.26x13.78x6.02(in)

**Weight:**  
empty: 2,84kg - 6.26lbs  
with foam: 3,25kg - 7.16lbs

**Temperature rating:**  
Minimum  
-40°C -40°F  
Maximum  
+80°C +176°F




## TECHNICAL DRAWING

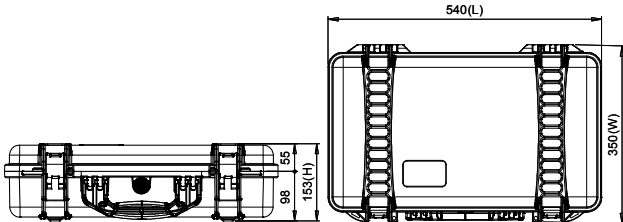

# HPRC4800W for Apple Mac Pro

## MPRO-4800W-01

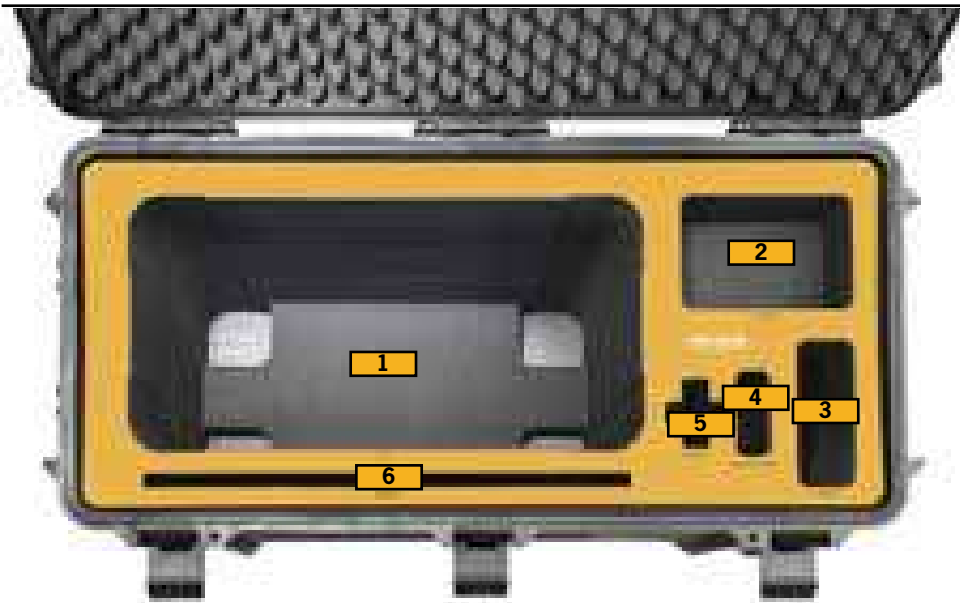

- 1 Mac Pro
- 2 Miscellaneous
- 3 Power cord
- 4 USB-C to Lightning Cable
- 5 Magic Mouse 2
- 6 Magic Keyboard



HPRC APPLE MAC PRO

### TECHNICAL FEATURES

#### Dimension:

internal dimension  
720x320x600(mm) - 28.34x12.60x23.62(in)  
external dimension  
776x380x649(mm) - 30.55x14.96x25.55(in)

#### Weight:


empty: 10.00kg - 22.21lbs  
with cubed foam: 14.10kg - 31.08lbs

#### Temperature rating:

Minimum Maximum  
-40°C -40°F +80°C +176°F



### TECHNICAL DRAWING

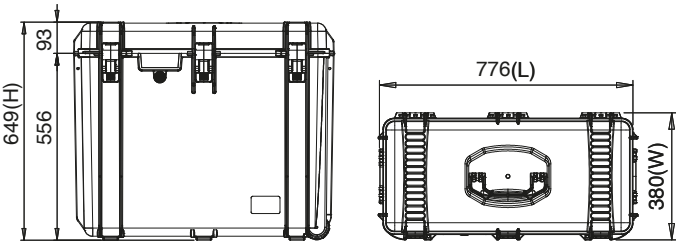

# HPRC2400 for MacPro15"

## MPRO-2400-01



- 1 MacBook Pro 15"
- 2 Miscellaneous



HPRC APPLE MACPRO 15"

### TECHNICAL FEATURES


**Dimension:**  
Internal dimension  
377x263,9x150,8(mm) - 14.84x10.39x5.94(in)  
External dimension  
402X330,5X169,2(mm) - 15.83x13.01x6.66(in)

**Weight:**  
empty: 2,38kg - 5.25lbs

**Temperature rating:**  
Minimum            Maximum  
-40°C -40°F        +80°C +176°F



### TECHNICAL DRAWING

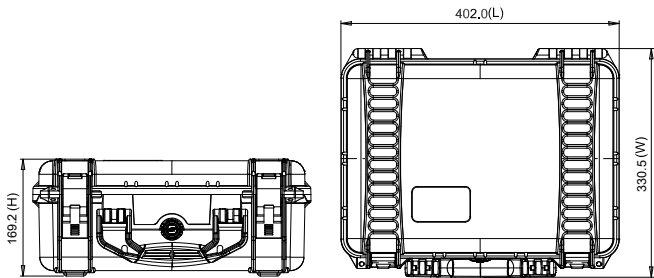



H READY




EIZO

HPRC READY MADE SOLUTIONS – 2023

# HPRC4800W for EIZO 27/24"

## EIZ27-4800W-01

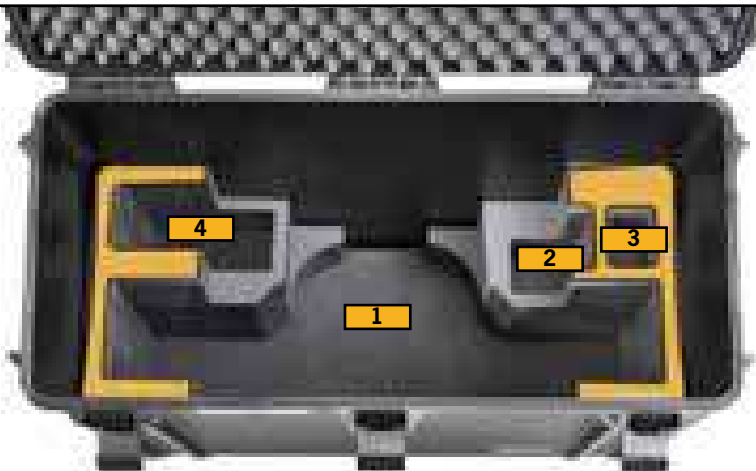

- 1 Eizo Monitor 27" or 24"
- 2 Cables and accessories
- 3 Cables and accessories
- 4 Protective hood and accessories



HPRC EIZO 27/24"

### TECHNICAL FEATURES


**Dimension:**  
internal dimension  
720x320x600(mm) - 28.34x12.60x23.62(in)  
external dimension  
776x380x649(mm) - 30.55x14.96x25.55(in)

**Weight:**  
empty: 11,12kg - 24.50lbs  
with cubed foam: 12,43kg - 27.40lbs

**Temperature rating:**  
Minimum Maximum  
-40°C -40°F +80°C +176°F



### TECHNICAL DRAWING

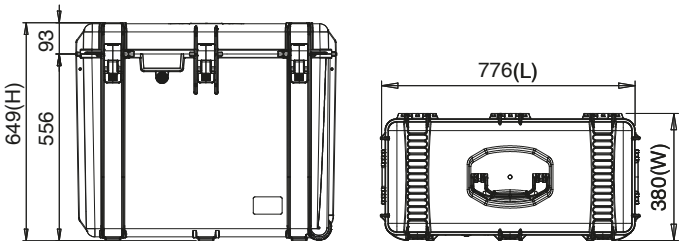



## UNIVERSAL MICROPHONES

HPNC READY MADE SOLUTIONS – 2023

# HPRC2200 for Universal Microphones

## MCF3-2200-01



**1** Universal Microphone



### TECHNICAL FEATURES


**Dimension:**  
 internal dimension  
 236x182x108(mm) - 9.29x7.17x4.25(in)  
 external dimension  
 258x244,3x123,3(mm) - 10.16x9.62x4.85(in)

**Weight:**  
 empty: 0,87kg - 1.92lbs  
 with cubed foam: 1,08kg - 2.38lbs

**Temperature rating:**  
 Minimum                      Maximum  
 -40°C -40°F                      +80°C +176°F




### TECHNICAL DRAWING

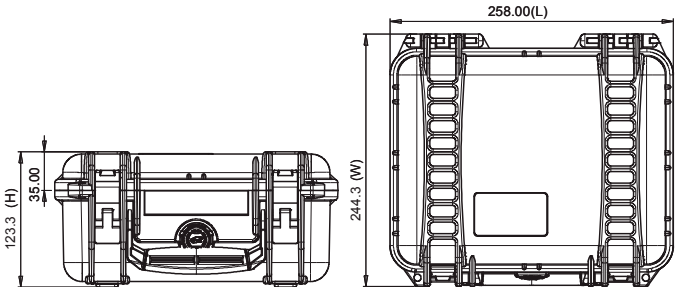

# HPRC2250 for Universal Microphones

## MCF6-2250-01

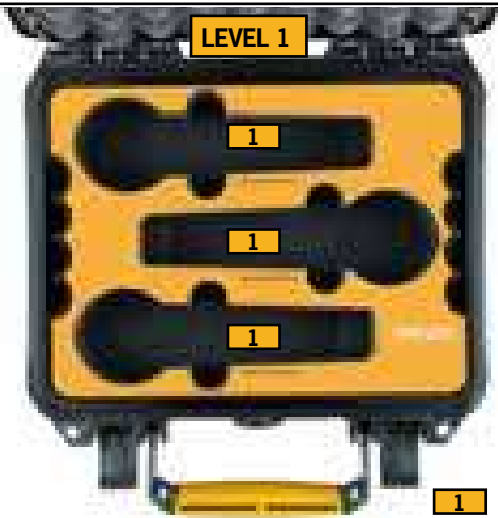

1 Universal Microphone



### TECHNICAL FEATURES

#### Dimension:

internal dimension  
236x182x155(mm) - 9.29x7.17x6.10(in)  
external dimension  
258X230X170(mm) - 10.16x9.06x6.69(in)

#### Weight:


empty: 1,00kg - 2.20lbs  
with cubed foam: 1,35kg - 2.97lbs

#### Temperature rating:

Minimum Maximum  
-40°C -40°F +80°C +176°F



### TECHNICAL DRAWING

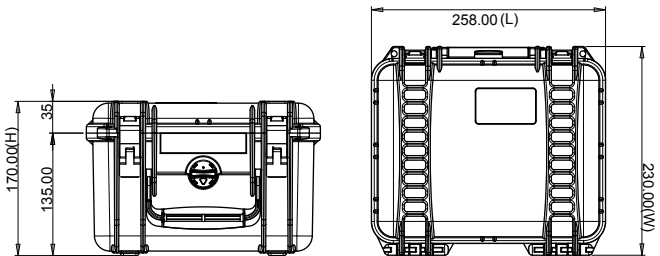





I   
BROMPTON

BROMPTON

HPRC READY MADE SOLUTIONS – 2023

# HPRC4800W for Brompton

## BRO4800W-01



**1** Brompton Bike

**2** Accessories

### TECHNICAL FEATURES

#### Dimension:

internal dimension  
720x320x600(mm) - 28.34x12.60x23.62(in)  
external dimension  
776x380x649(mm) - 30.55x14.96x25.55(in)

#### Weight:


empty: 10,00kg - 22.21lbs  
with cubed foam: 14,10kg - 31.08lbs

#### Temperature rating:

Minimum  
-40°C -40°F  
Maximum  
+80°C +176°F



### TECHNICAL DRAWING

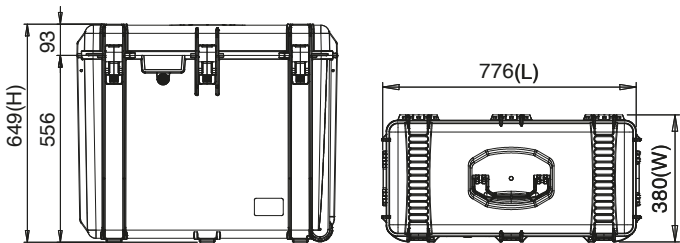

| code                    | description                                                           | page      |
|-------------------------|-----------------------------------------------------------------------|-----------|
|                         | <b>DJI</b>                                                            | <b>4</b>  |
| <b>S-MAV3P-2400-01</b>  | HPRC2400 FOR DJI MAVIC 3 PRO CINE PREMIUM COMBO / FLY MORE COMBO      | 5         |
| <b>S-MAV3P-3500-01</b>  | HPRC3500 FOR DJI MAVIC 3 PRO CINE PREMIUM COMBO / FLY MORE COMBO      | 6         |
| <b>S-MAV3PBAG35</b>     | HPRC SOFT BAG FOR DJI MAVIC 3 PRO CINE PREMIUM COMBO / FLY MORE COMBO | 7         |
| <b>MAV3-2400-01</b>     | HPRC2400 FOR DJI MAVIC3 CINE OR DJI MAVIC3                            | 8         |
| <b>MAV3-3500-01</b>     | HPRC3500 FOR DJI MAVIC3 CINE OR DJI MAVIC3                            | 9         |
| <b>MAVBAG35-05</b>      | SOFT BAG WITH FOAM FOR DJI MAVIC3 CINE OR DJI MAVIC3                  | 10        |
| <b>S-M350-2800W-01</b>  | HPRC2800W FOR DJI MATRICE 300 OR 350 RTK                              | 11        |
| <b>M300-2800W-03</b>    | HPRC2800W FOR DJI MATRICE 300 RTK                                     | 12        |
| <b>BAT2550W-04</b>      | HPRC2550W BATTERY CASE FOR DJI MATRICE 300/350                        | 13        |
| <b>DRTK6500W-01</b>     | HPRC6500W FOR DJI D-RTK2                                              | 14        |
| <b>M30T-5200R-01</b>    | HPRC5200R FOR MATRICE 30T                                             | 15        |
| <b>M30T-2760W-01</b>    | HPRC2760W FOR MATRICE 30T                                             | 16        |
| <b>M30T-2700W-01</b>    | HPRC2700W FOR MATRICE 30T                                             | 17        |
| <b>BAT2460-01</b>       | HPRC2460 FOR BATTERIES TB30 AND DJI RC PLUS                           | 18        |
| <b>S-INS3-2800W-01</b>  | HPRC2800W FOR DJI INSPIRE 3                                           | 19        |
| <b>S-BAT2550W-05</b>    | HPRC2550W FOR INSPIRE 3 BATTERIES                                     | 20        |
| <b>S-MAVM-2300-04</b>   | HPRC2300 FOR DJI MINI 4 PRO FLY MORE COMBO WITH SMART CONTROLLER      | 21        |
| <b>MAVM2300-03-01</b>   | HPRC2300 FOR DJI MINI 3 PRO WITH RC AND RC-N1 CONTROLLER              | 22        |
| <b>S-MAV3A-2400-01</b>  | HPRC2400 FOR DJI AIR 3 FLY MORE COMBO                                 | 23        |
| <b>S-MAV3A-3500-01</b>  | HPRC3500 FOR DJI AIR 3 FLY MORE COMBO                                 | 24        |
| <b>AVAT-2500-01</b>     | HPRC2500 FOR DJI AVATA PRO - VIEW COMBO                               | 25        |
| <b>AVAT-3500-01</b>     | HPRC3500 FOR DJI AVATA PRO - VIEW COMBO                               | 26        |
| <b>FPV-2500-01</b>      | HPRC2500 FOR DJI FPV COMBO                                            | 27        |
| <b>FPV-3600-01</b>      | HPRC3600 FOR DJI FPV COMBO                                            | 28        |
| <b>PHA4RTK-2700W-01</b> | HPRC2700W FOR DJI PHANTOM 4RTK / MULTISPECTRAL                        | 29        |
| <b>PHA4-2710-02</b>     | HPRC2710 FOR DJI PHANTOM 4                                            | 30        |
| <b>PHA4-BAG27-02</b>    | SOFT BAG FOR DJI PHANTOM 4                                            | 31        |
| <b>R4D-2730W-01</b>     | HPRC2730W FOR DJI RONIN 4D-6K COMBO                                   | 32        |
| <b>RS3-2600-01</b>      | HPRC2600 FOR DJI RS 3 PRO COMBO                                       | 33        |
| <b>RS3M-2300-01</b>     | HPRC2300 FOR DJI RS 3 MINI CREATOR COMBO                              | 34        |
| <b>OSMPKT-1400-02</b>   | HPRC 1400 FOR DJI POCKET 2 CREATIVE COMBO KIT                         | 35        |
| <b>S-OSMPKT-1400-03</b> | HPRC1400 FOR DJI OSMO POCKET 3 CREATOR COMBO                          | 36        |
|                         | <b>AUTEL ROBOTICS</b>                                                 | <b>38</b> |
| <b>LITE-2460-01</b>     | HPRC2460 FOR FOR AUTEL ROBOTICS EVO LITE+ PREMIUM BUNDLE              | 39        |
| <b>NANO-2300-01</b>     | HPRC2300 FOR AUTEL ROBOTICS EVO NANO+ PREMIUM BUNDLE                  | 40        |
| <b>EVO2-2400-02</b>     | HPRC2400 FOR AUTEL EVO II 6K / 8K DRONE - REV. 02                     | 41        |
|                         | <b>ATOMOS</b>                                                         | <b>42</b> |
| <b>NJAV-2300-01</b>     | HPRC2300 FOR ATOMOS NINJA V                                           | 43        |
| <b>S-SHGC-2400-01</b>   | HPRC 2400 FOR ATOMOS SHOGUN, SHOGUN ULTRA AND SHOGUN CONNECT          | 44        |
| <b>SM19-2730W-01</b>    | HPRC2730W FOR ATOMOS SUMO 19"                                         | 45        |

| code                  | description                                                                                          | page |
|-----------------------|------------------------------------------------------------------------------------------------------|------|
|                       | <b>BLACKMAGIC</b>                                                                                    | 46   |
| <b>PKT6P-2400-01</b>  | HPRC2400 FOR BLACKMAGIC POCKET CINEMA CAMERA 6K PRO                                                  | 47   |
| <b>PKTC-2400-01</b>   | HPRC2400 COMBO FOR BLACKMAGIC POCKET CINEMA CAMERA 6K OR 4K + METABONES                              | 48   |
| <b>S-BMS-5200-01</b>  | HPRC5200 FOR BLACKMAGIC STUDIO CAMERA 6K PRO/4K PRO G2/4K PLUS                                       | 49   |
| <b>S-ATS-2760W-01</b> | HPRC2760W FOR BLACKMAGIC DESIGN ATEM TELEVISION STUDIO 4K8 /HD8 /HD8 ISO + ATEM MICROPHONE CONVERTER | 50   |
| <b>S-ACCP-2710-01</b> | HPRC2710 FOR BLACKMAGIC DESIGN ATEM CAMERA CONTROL PANEL                                             | 51   |
| <b>AMI-2300-01</b>    | HPRC2300 FOR ATEM MINI, ATEM MINI PRO AND ATEM MINI PRO ISO                                          | 52   |
| <b>AME-2500-01</b>    | HPRC2500 FOR ATEM MINI EXTREME AND ATEM MINI EXTREME ISO                                             | 53   |
| <b>ADV1-2710-01</b>   | HPRC2710 FOR BLACKMAGIC DESIGN ATEM 1 M/E ADVANCED PANEL                                             | 54   |
| <b>URS2730W-03</b>    | HPRC2730W FOR BLACKMAGIC URSA MINI PRO - URSA BROADCAST                                              | 55   |
|                       | <b>SONY</b>                                                                                          | 56   |
| <b>ALP2460-01</b>     | HPRC2460 SPECIAL EDITION FOR SONY ALPHA                                                              | 57   |
| <b>FX3-2400-01</b>    | HPRC2400 FOR SONY FX3 CINEMA LINE                                                                    | 58   |
| <b>FX6-2550W-01</b>   | HPRC2550W PER SONY ILME-FX6 CINEMA LINE                                                              | 60   |
| <b>FX9-2700W-01</b>   | HPRC2700W FOR SONY PXW-FX9 - CINEMA LINE                                                             | 61   |
| <b>Z280-2600W-01</b>  | HPRC2600W FOR SONY PXW-Z280                                                                          | 62   |
| <b>Z190-2700W-01</b>  | HPRC2700W FOR SONY PXWZ190V                                                                          | 63   |
|                       | <b>CANON</b>                                                                                         | 64   |
| <b>CR5-2300-01</b>    | HPRC2300 FOR CANON EOS R5 / R6                                                                       | 65   |
| <b>C300-2700W-01</b>  | HPRC2700W FOR CANON EOS C300 MARK III                                                                | 66   |
| <b>C70-2600-01</b>    | HPRC2600 FOR CANON EOS C70                                                                           | 67   |
| <b>C200-2600-01</b>   | HPRC2600 FOR CANON EOS C200                                                                          | 68   |
| <b>C100-2600-01</b>   | HPRC2600 FOR CANON EOS C100                                                                          | 69   |
|                       | <b>MOZA</b>                                                                                          | 70   |
| <b>MAIR2-2530-01</b>  | HPRC2530 FOR MOZA AIR2 IFOCUS                                                                        | 71   |
|                       | <b>ZHIYUN CRANE</b>                                                                                  | 72   |
| <b>CR3SP-2700W-01</b> | HPRC2700W FOR ZHIYUN CRANE 3S PRO                                                                    | 73   |
| <b>CR3-2700W-01</b>   | HPRC2700W FOR ZHIYUN CRANE 3 LAB MASTER PACKAGE                                                      | 74   |
| <b>CR3-2600W-01</b>   | HPRC2600W FOR ZHIYUN CRANE 3 LAB                                                                     | 75   |
|                       | <b>Z CAM</b>                                                                                         | 76   |
| <b>ZE2F6-2400-01</b>  | HPRC2400 FOR ZCAM E2-F6 FULL FRAME 6K CINEMA CAMERA                                                  | 77   |
|                       | <b>FUJIFILM</b>                                                                                      | 78   |
| <b>GFX100-2500-01</b> | HPRC2500 FOR FUJIFILM GFX100                                                                         | 79   |
|                       | <b>RED</b>                                                                                           | 80   |
| <b>RGE-2730W-01</b>   | HPRC2730W FOR RED RANGER GEMINI                                                                      | 81   |
|                       | <b>NIKON</b>                                                                                         | 82   |
| <b>D850-2460-01</b>   | HPRC2460 FOR NIKON D850 FILMMAKER'S KIT                                                              | 83   |

# Index

| code           | description                                                | page |
|----------------|------------------------------------------------------------|------|
|                | <b>PANASONIC</b>                                           | 84   |
| S-GH52460-01   | HPRC2460 SPECIAL EDITION FOR PANASONIC GH5 AND ACCESSORIES | 85   |
|                | <b>LEICA</b>                                               | 86   |
| LEM2400-01     | HPRC2400 FOR LEICA M                                       | 87   |
| LEM2460-01     | HPRC2460 FOR LEICA M                                       | 88   |
|                | <b>APPLE</b>                                               | 90   |
| STU-2530-01    | HPRC2530 FOR APPLE MAC STUDIO / MAC MINI                   | 91   |
| MPRO-2530-01   | HPRC2530 FOR MACBOOK PRO 16"                               | 92   |
| MPRO-4800W-01  | HPRC4800W FOR APPLE MACPRO 2020                            | 93   |
| MPRO-2400-01   | HPRC2400 FOR APPLE MACBOOK PRO 15"                         | 94   |
|                | <b>EIZO</b>                                                | 96   |
| EIZ27-4800W-01 | HPRC4800W PER MONITOR EIZO 27"E MONITOR EIZO 24"           | 97   |
|                | <b>UNIVERSAL MICROPHONES</b>                               | 98   |
| MCF3-2200-01   | HPRC2200 FOR 3 UNIVERSAL MICROPHONES                       | 100  |
| MCF6-2250-01   | HPRC2250 FOR 6 UNIVERSAL MICROPHONES                       | 101  |
|                | <b>BROMPTON</b>                                            |      |
| BR04800W-01    | HPRC4800W FOR BROMPTON FOLDING BIKE                        |      |

 READY





**Plaber S.r.l. - HPRC cases**

Via Div. Tridentina, 10  
36061 Bassano del Grappa  
Vicenza - Italy

Tel. +39 0424 809150

USA office and warehouse:

**Plaber America Inc - HPRC cases**

110 Chestnut Ridge Rd. #314  
Montvale, NJ 07645

Tel. +1 (201) 989 3353

[www.hprc.it](http://www.hprc.it) | [www.hprcusa.com](http://www.hprcusa.com)

[info@hprc.it](mailto:info@hprc.it)

HPRC® Brand owned by:

*plaber*

HPRC READY MADE SOLUTIONS – 2023