

plaber®

 READY

HPRC READY MADE SOLUTIONS – 2025

We are HPRC. We don't just design and manufacture watertight hard protective cases, we supply carrying solutions. And solutions need to be no-hassle and tailored to your needs.

This is why in Autumn 2013 we designed our first case with a foam specially cut to house the DJI Phantom 1.

Now, almost 12 years later, we are a leading manufacturer of custom cases for drones, gimbals, camcorders and cameras but we feel we are still at the beginning: more is yet to come.

MADE IN ITALY

HPRC VECTOR PANEL

The new protective layer system designed for your Ready Case



Made of special PVC based compound, the Vector Panel ensures:

- foam long-last durability;
- improved protection for the equipment;
- dedicated item slots, suitably marked, avoiding lost tools;
- easy and quick organization of the case;
- savings in space and time;
- professional design and presentation.



The system significantly increases the overall performance and efficiency of the case in any kind of environment, weather conditions and temperature.



DJI



HPRC READY MADE SOLUTIONS – 2025

HPRC2460 for DJI Mavic 4 Pro Creator Combo

S-MAV4P-2460-01



- 1 DJI Mavic 4 Pro Creator Combo
- 2 Power Adapter
- 3 DJI RC Pro 2/DJI RC 2/DJI RC-N2 Controllers
- 4 ND Filters Set/Cables
- 5 Propellers/Miscellaneous
- 6 Charging Hub with Batteries



TECHNICAL FEATURES


Dimension:
Internal dimension:
409x306x175(mm) - 16.10x12.05x6.89(in)
External dimension:
435x377,8x193(mm) - 17.13x14.87x7.60(in)

Weight:
2,55kg - 5.62lbs

Temperature rating:
Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

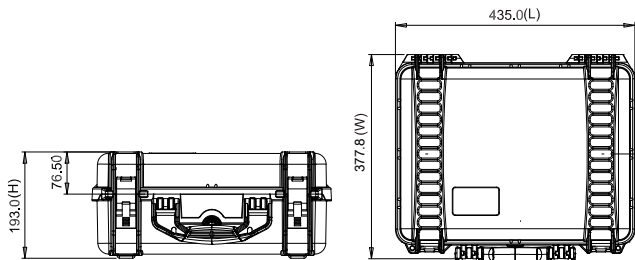

HPRC2400 for DJI Mavic 3 Pro Cine Premium Combo / Fly More Combo **S-MAV3P-2400-02**



- 1 DJI Mavic 3 Pro Cine Premium Combo or Fly More Combo with Storage Cover
- 2 Battery Charging Hub / Cables
- 3 DJI RC Pro / DJI RC-N1 / DJI Smart Controller
- 4 Portable Charger DJI
- 5 Miscellaneous/Propellers for DJI Mavic 3 series
- 6 ND Filters Set
- 7 Intelligent Flight Battery



TECHNICAL FEATURES


Dimension:
 Internal dimension:
 377x263,9x150,8(mm) - 14.84x10.39x5.94(in)
 External dimension:
 402x330,5x169,2(mm) - 15.83x13.01x6.66(in)

Weight:
 empty: 2,17kg - 4.78lbs
 with cubed foam: 2,58kg - 5.69lbs


Temperature rating:
 Minimum Maximum
 -40°C -40°F +80°C +176°F



TECHNICAL DRAWING

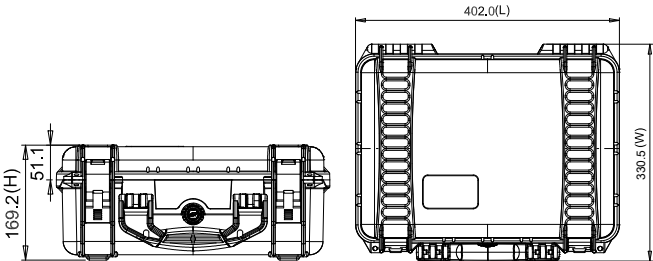

HPRC2600 for DJI Mavic 3 Pro Cine Premium Combo Flying Mode & DJI Mini 4 Pro Fly More Combo S-MAV3PFM-2600-01

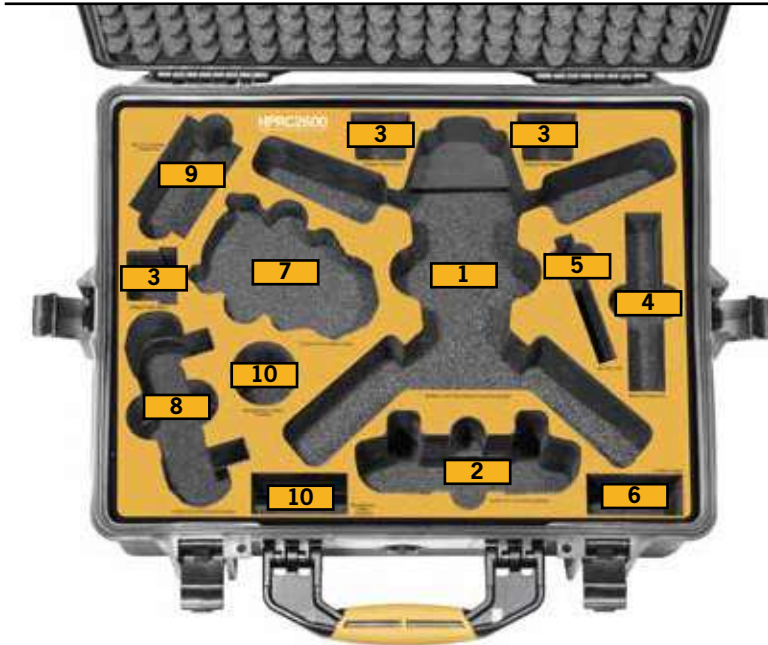

- 1 DJI Mavic 3 Pro Cine Premium Combo Flying Mode
- 2 DJI RC / Pro / DJI Smart Controller
- 3 Intelligent Flight Battery
- 4 Battery Charging Hub
- 5 ND Filters Set
- 6 Portable Charger
- 7 DJI Mini 4 Pro Fly More Combo
- 8 DJI RC2 / DJI RC-N2 Smart Controller
- 9 Mini 4 Pro Two-Way Charging Hub
- 10 Miscellaneous / Cables / Propellers



HPRC DJI MAVIC 3 PRO CINE PREMIUM COMBO / FLY MORE COMBO


TECHNICAL FEATURES

Dimension:
Internal dimension:
482,4x358,3x198,1(mm) - 18.99x14.10x7.80(in)
External dimension:
543,4x426,8x218,1(mm) - 21.39x16.80x8.59(in)

Weight:
empty: 4,25kg - 9.37lbs
with cubed foam: 5,05kg - 11.13lbs

Temperature rating:
Minimum Maximum
-40°C -40°F +80°C +176°F

TECHNICAL DRAWING

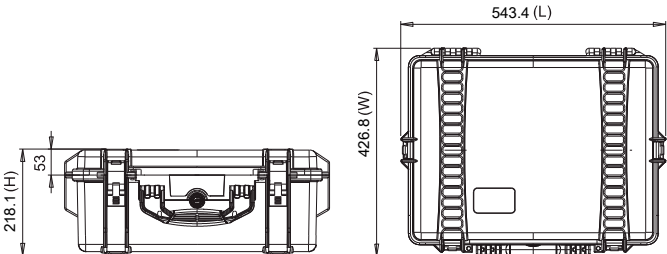

HPRC3500 for DJI Mavic 3 Pro Cine Premium Combo / Fly More Combo S-MAV3P-3500-01



- 1 DJI Mavic 3 Pro with Storage Cover
- 2 Battery Charging Hub / Cables
- 3 DJI RC / Pro / DJI Smart Controller
- 4 Propellers / Portable Charger
- 5 Miscellaneous
- 6 ND Filters Set
- 7 Intelligent Flight Battery



TECHNICAL FEATURES


Dimension:
 Internal dimension:
 433,5x319,3x168,8(mm) - 17.07x12.57x6.65(in)
 External dimension:
 497,9x370,3x185(mm) - 19.60x14.58x7.28(in)

Weight:
 empty: 3kg - 6.61lbs
 with cubed foam: 3,55kg - 7.82lbs

Temperature rating:
 Minimum Maximum
 -40°C -40°F +80°C +176°F




TECHNICAL DRAWING

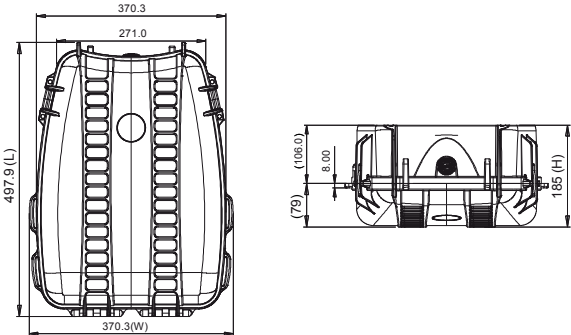

HPRC Soft bag for DJI Mavic 3 Pro Cine Premium Combo / Fly More Combo

S-MAV3PBAG35

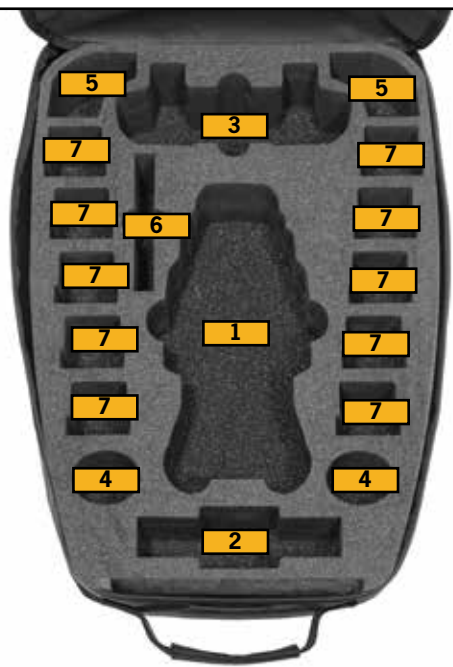

- 1 DJI Mavic 3 Pro with Storage Cover
- 2 Battery Charging Hub / Cables
- 3 DJI RC / Pro / DJI Smart Controller
- 4 Propellers / Portable Charger
- 5 Miscellaneous
- 6 ND Filters Set
- 7 Intelligent Flight Battery

TECHNICAL FEATURES

Dimension:
internal dimension
433x319x169(mm) - 17.05x12.56x6.65(in)
external dimension
498x370x185(mm) - 19.61x14.57x7.28(in)



HPRC DJI MAVIC 3 PRO CINE PREMIUM COMBO / FLY MORE COMBO

HPRC2400 for DJI Mavic 3 Cine / DJI Mavic 3 /
DJI Mavic 3 Classic
S-MAV3-2400-01



- 1 DJI Mavic 3 Cine / DJI Mavic 3 / DJI Mavic 3 Classic
- 2 Battery Charging Hub / Cables
- 3 DJI RC Pro / DJI RC-N1 / DJI Smart Controllers
- 4 Propellers / Portable Charger
- 5 Miscellaneous
- 6 ND Filters Set 2X
- 7 Intelligent Flight Battery



TECHNICAL FEATURES


Dimension:
Internal dimension
377x263,9x150,8(mm) - 14.84x10.39x5.94(in)
External dimension
402X330,5X169,2(mm) - 15.83x13.01x6.66(in)

Weight:
empty: 2,23kg - 4.92lbs
with cubed foam: 2,58kg - 5.69lbs

Temperature rating:
Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

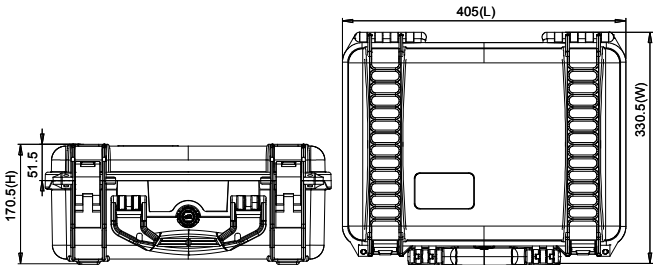

HPRC3500 for DJI Mavic 3 Cine / DJI Mavic 3 / DJI Mavic 3 Classic **S-MAV3-3500-01**



- 1** DJI Mavic 3 Cine / DJI Mavic 3 / DJI Mavic 3 Classic
- 2** Battery Charging Hub / Cables
- 3** DJI RC Pro / DJI RC-N1 / DJI Smart Controllers
- 4** Propellers
- 5** Miscellaneous
- 6** ND Filters Set 2X
- 7** Intelligent Flight Battery



HPRC MAVIC 3 CINE / DJI MAVIC 3 / DJI MAVIC 3 CLASSIC

TECHNICAL FEATURES

Dimension:

Internal dimension
 433,5x319,3x168,8(mm) - 17.07x12.57x6.65(in)
 External dimension
 497,9x370,3x184,9(mm) - 19.6x14.58x7.28(in)

Weight:


empty: 3,00kg - 6.61lbs
 with cubed foam: 3,55kg - 7.82lbs

Temperature rating:

Minimum Maximum
 -40°C -40°F +80°C +176°F




TECHNICAL DRAWING

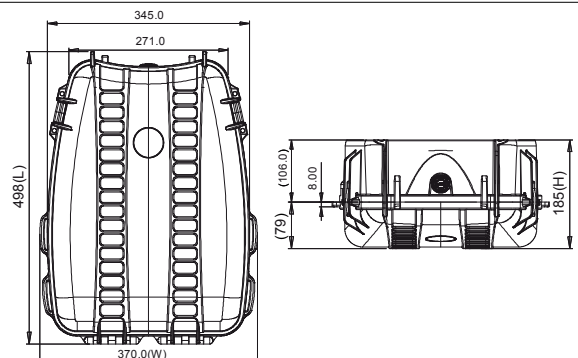

HPRC Soft Bag for DJI Mavic 3 Cine /
DJI Mavic 3

S-MAVBAG35-05

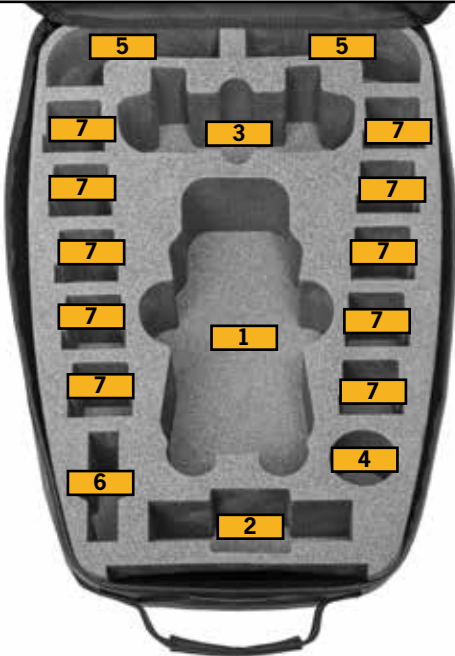

- 1
- DJI Mavic 3 Cine / DJI Mavic 3
- 2
- Battery Charging Hub / Cables
- 3
- DJI RC Pro / DJI RC-N1 / DJI Smart Controllers
- 4
- Propellers
- 5
- Miscellaneous
- 6
- ND Filters Set 2X
- 7
- Intelligent Flight Battery



TECHNICAL FEATURES

Dimension:

internal dimension

433x319x169(mm) - 17.05x12.56x6.65(in)

external dimension

498x370x185(mm) - 19.61x14.57x7.28(in)



HPRC2800W for DJI Matrice 350 RTK (Zenmuse L2 & Zenmuse H30/H30T version) S-M350-2800W-03



- 1 DJI Matrice 300 or 350 RTK in Landing Mode (2 Gimbal and 2 Batteries mounted)
- 2 2X DJI RC Plus
- 3 Zenmuse L2
- 4 Zenmuse P1



- 5 Propellers
- 6 WB37 Intelligent Battery
- 7 TB60 or TB65 Intelligent Flight Battery
- 8 Zenmuse H30/H30T



HPRC DJI MATRICE 350 RTK

TECHNICAL FEATURES


Dimension:
Internal dimension
748,6x524,6x454,6(mm) - 29.47x20.65x17.9(in)
External dimension
813,3x586,5x480,5(mm) - 32.02x23.09x18.92(in)

Weight:
empty: 13,25kg - 29.22lbs
with cubed foam: 17,43kg - 38.43lbs



Temperature rating:
Minimum
-40°C -40°F
Maximum
+80°C +176°F



TECHNICAL DRAWING

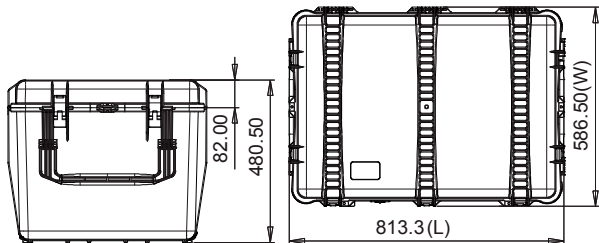

HPRC2800W for DJI Matrice 300 RTK (Zenmuse H30/H30T version) S-M300-2800W-04

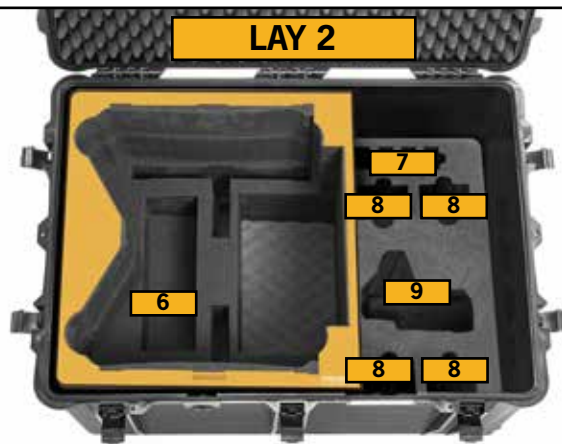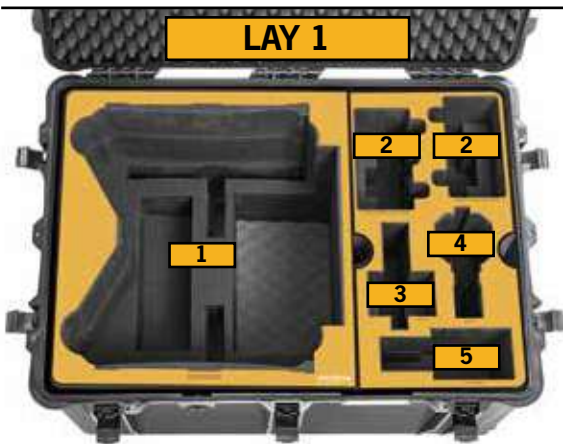

- 1 DJI Matrice 300 RTK in Landing Mode
(2 Gimbal and 2 Batteries mounted)
- 2 DJI Smart Controller Enterprise (Battery Attached)
- 3 Zenmuse L1
- 4 Zenmuse P1
- 5 H20/H20T Gimbal

- 6 Propellers
- 7 WB37 Intelligent Battery
- 8 TB60 Intelligent Flight Battery
- 9 Zenmuse H30/H30T



TECHNICAL FEATURES

Dimension:

Internal dimension
748,6x524,6x454,6(mm) - 29.47x20.65x17.9(in)
External dimension
813,3x586,5x480,5(mm) - 32.02x23.09x18.92(in)

Weight:


empty: 13,25kg - 29.22lbs
with cubed foam: 17,43kg - 38.43lbs

Temperature rating:

Minimum Maximum
-40°C -40°F +80°C +176°F




TECHNICAL DRAWING

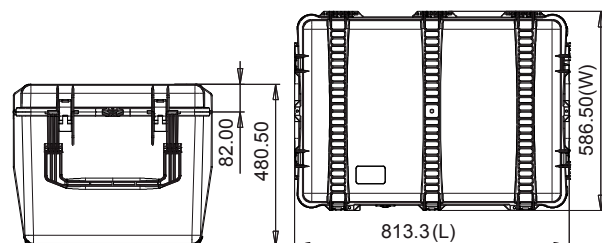

HPRC2550W for Battery DJI Matrice 300/350

S-BAT2550W-04

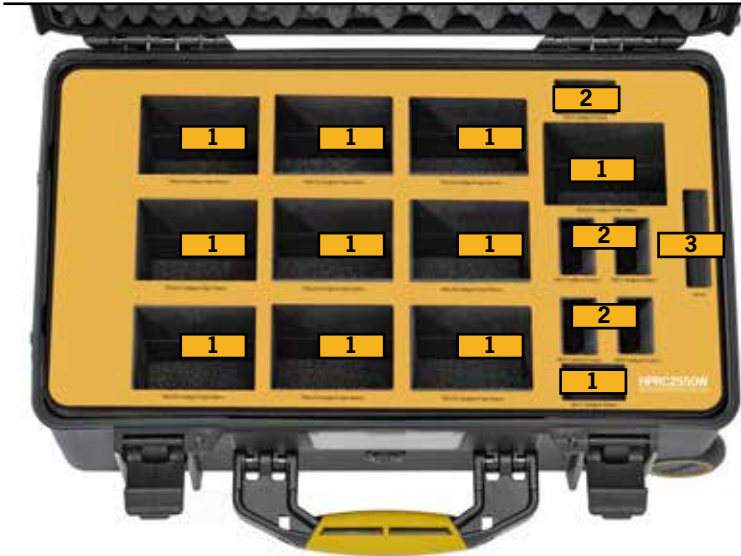

- 1 TB60/TB65 Intelligent Flight Battery
- 2 WB37 Intelligent Battery
- 3 Various/Perfect for Dry Keeper



TECHNICAL FEATURES


Dimension:
internal dimension
513x288x200(mm) - 20.19x11.34x7.87(in)
external dimension
549x346x236(mm) - 21.61x13.62x9.29(in)

Weight:
empty: 4.35kg - 9.57lbs

Temperature rating:
Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

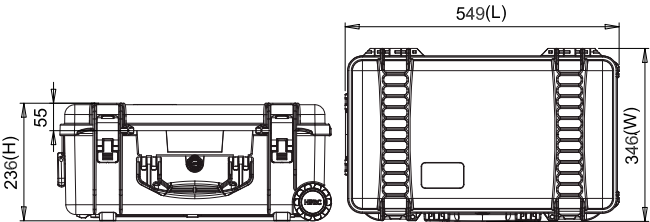

HPRC M300/350 BATTERY CASE

HPRC6500W for DJI D-RTK3

S-DRTK3-6500W-01




- 1 D-RTK 3 Multifunctional Station
- 2 Extra Antennas
- 3 Cables
- 4 DualLock Tripod
- 5 Self-locking Survey Pole

TECHNICAL FEATURES


Dimension: Internal dimension 1280,7x279x242,8(mm) - 50.42x10.98x9.56(in) External dimension 1328x335x299,8(mm) - 52.28x13.19x11.8(in)	
Weight: empty: 7,2kg - 15.88lbs	
Temperature rating: Minimum -40°C -40°F Maximum +80°C +176°F	

TECHNICAL DRAWING

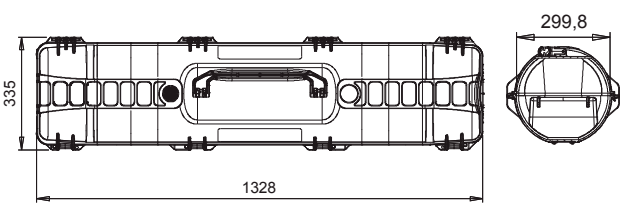

HPRC2500 for DJI Matrice 4E/4T

S-M4ET-2500-01

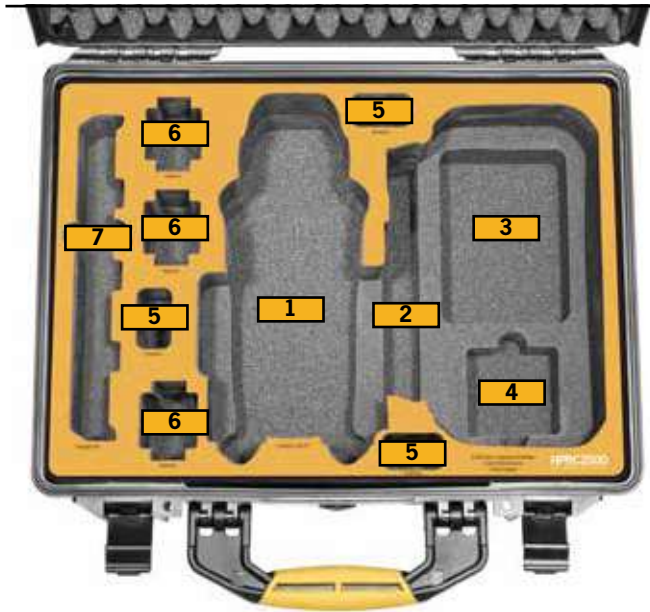

- 1 DJI Matrice 4E/4T
- 2 DJI RC Plus 2 Enterprise Controller
- 3 Cables/Miscellaneous
- 4 Power Adapter
- 5 Propellers
- 6 Batteries
- 7 Charging Hub



HPRC DJI MATRICE 4E/4T

TECHNICAL FEATURES


Dimension:
Internal dimension:
449,8x322,9x174,9(mm) - 17.71x12.71x6.89(in)
External dimension:
478,1x389,4x194(mm) - 18.82x15.33x7.64(in)

Weight:
empty: 3,08kg - 6.79lbs
with cubed foam: 3,71kg - 8.18lbs

Temperature rating:
Minimum Maximum
-40°C -40°F +80°C +176°F




TECHNICAL DRAWING

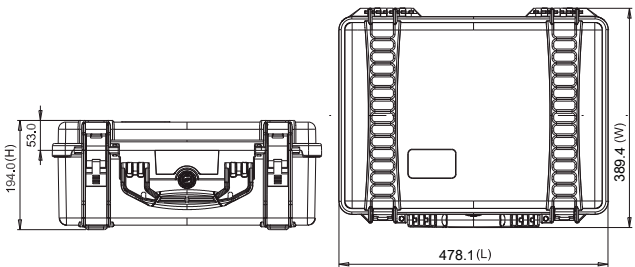

HPRC2710 for DJI Matrice 4D/4TD

S-M4TD-2710-01

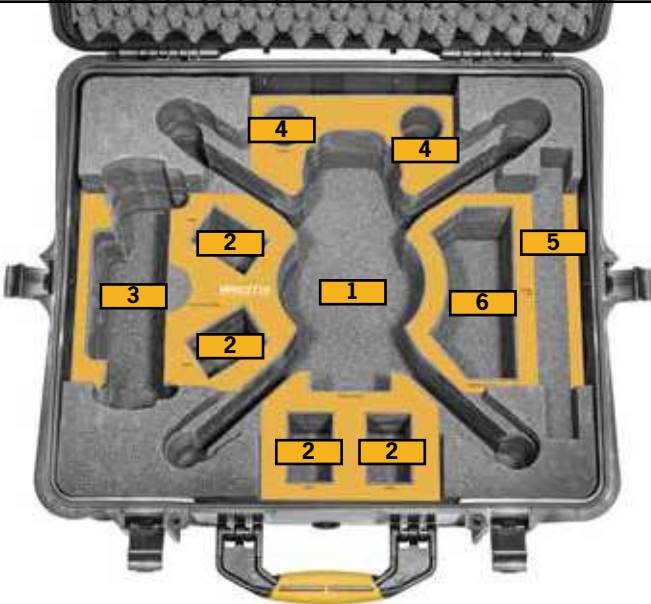

- 1 DJI Matrice 4D/4TD
- 2 Batteries
- 3 DJI RC Plus 2 Controller
- 4 Propellers
- 5 Charging Hub
- 6 Miscellaneous/Cables/Charging Kit



HPRC DJI MATRICE 4D/4TD


TECHNICAL FEATURES

Dimension:
Internal dimension
555x459x256(mm) - 21.85x18.07x10.08(in)
External dimension:
617x525x280(mm) - 24.29x20.67x11.02(in)

Weight:
empty: 6,56kg - 14.46lbs
with cubed foam: 7,96kg - 17.55lbs


Temperature rating:
Minimum -40°C -40°F
Maximum +80°C +176°F

TECHNICAL DRAWING

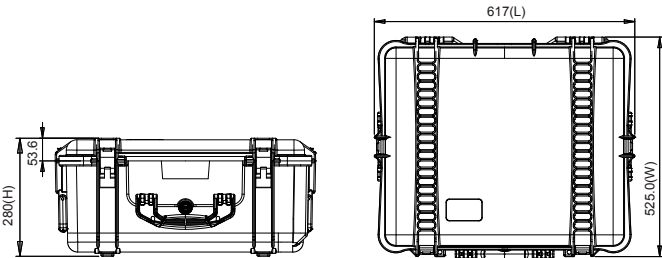

HPRC2710 for DJI Matrice 3D/3TD

S-M3TD-2710-01

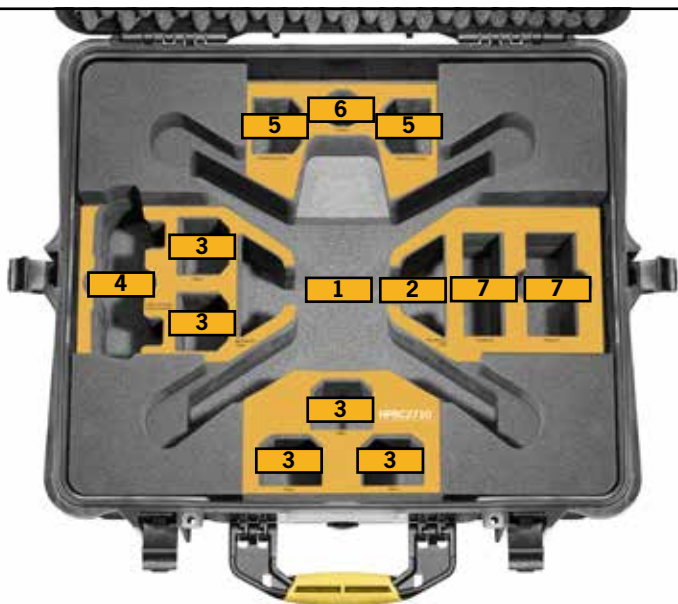

- 1 DJI Matrice 3D/3TD
- 2 Miscellaneous/Cables
- 3 Batteries
- 4 DJI RC Pro/DJI RC-N1/DJI Smart Controllers
- 5 Miscellaneous/Cables/Batteries
- 6 Propellers
- 7 Charging Kit




TECHNICAL FEATURES

Dimension:
Internal dimension
555x459x256(mm) - 21.85x18.07x10.08(in)
External dimension:
617x525x280(mm) - 24.29x20.67x11.02(in)

Weight:
empty: 6,56kg - 14.46lbs
with cubed foam: 7,96kg - 17.55lbs

Temperature rating:
Minimum Maximum
-40°C -40°F +80°C +176°F

TECHNICAL DRAWING

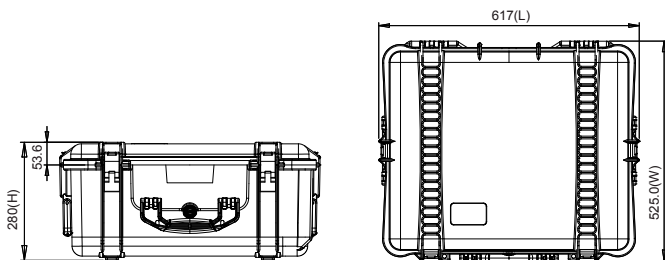

HPRC5200R for DJI Matrice 30T S-M30T-5200R-01



- 1 Aircraft Body
- 2 DJI RC Plus Remote Controller
- 3 TB30 Battery
- 4 Various/Miscellaneous




TECHNICAL FEATURES

Dimension:
Internal dimension
772x302x210(mm) - 30.39x11.89x8.26 (in)
External dimension
802x355x246.7(mm) - 31.57x13.97x9,71 (in)

Weight:
empty: 5.05kg – 11.1lbs

Temperature rating:
Minimum Maximum
-40°C -40°F +80°C +176°F


TECHNICAL DRAWING

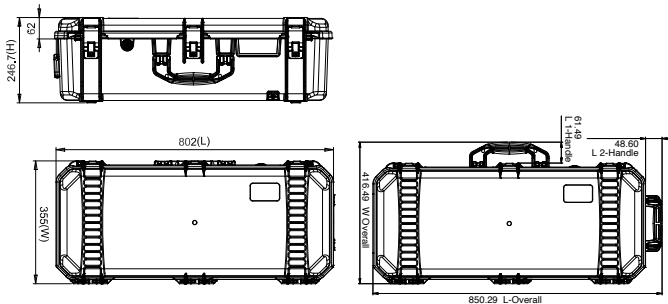

HPRC2760W for DJI Matrice 30T S-M30T-2760W-01




TECHNICAL FEATURES	
Dimension: Internal dimension 690x450x301(mm) - 27.16x17.72x11.85(in) External dimension 750x511x329(mm) - 29.53x20.12x12.95(in)	W
Weight: empty: 8,93kg - 19.69lbs with cubed foam: 10,72kg - 23.63lbs	
Temperature rating: Minimum -40°C -40°F Maximum +80°C +176°F	

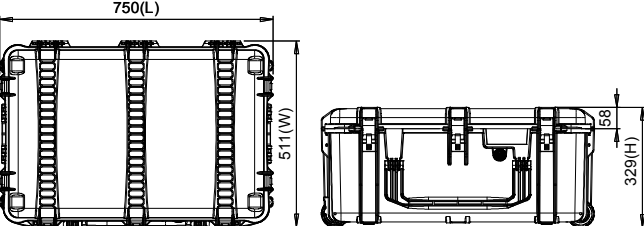TECHNICAL DRAWING	
	

HPRC2500 for DJI RC Plus 2/Plus Controllers and WB37 Batteries

S-RCP-2500-02

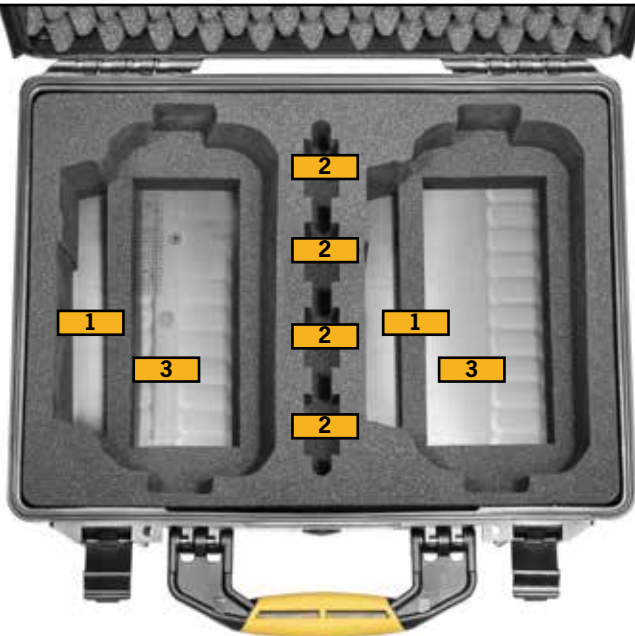

- 1 DJI RC Plus 2/Plus Controllers
- 2 WB37 Batteries
- 3 Miscellaneous

TECHNICAL FEATURES


Dimension:
Internal dimension:
449,8x322,9x174,9(mm) - 17.71x12.71x6.89(in)
External dimension:
478,1x389,4x194(mm) - 18.82x15.33x7.64(in)

Weight:
empty: 3,08kg - 6.79lbs
with cubed foam: 3,71kg - 8.18lbs



Temperature rating:
Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

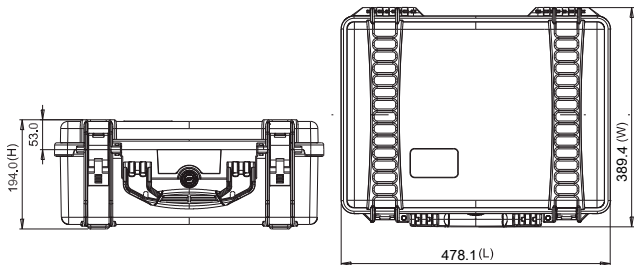

HPRC2800W for DJI Inspire 3 S-INS3-2800W-01

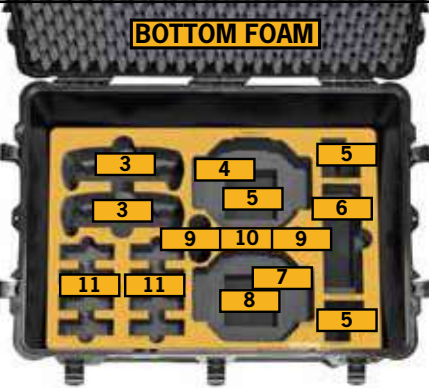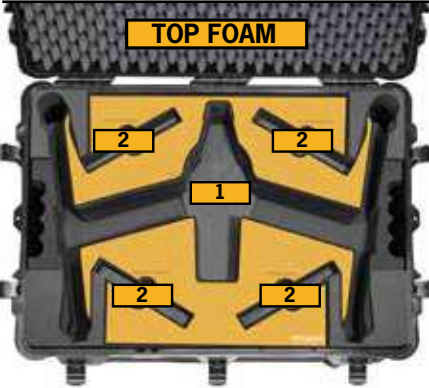

- 1 1 Inspire 3 Aircraft
- 2 Foldable Quick-Release Propellers (Pair)/ Miscellaneous
- 3 RC Plus
- 4 Zenmuse X9-8K Air Gimbal Camera Case
- 5 Various / Miscellaneous
- 6 TB51 Intelligent Battery Charging Hub
- 7 Lens Carrying Box (18/24/35/50mm)
- 8 RC Plus Strap
- 9 Cable
- 10 PROSSD 1TB
- 11 TB51 Intelligent Battery



HPRC DJI INSPIRE 3

TECHNICAL FEATURES


Dimension:
 Internal dimension:
 748,6x524,6x454,6(mm) - 29.47x20.65x17.90(in)
 External dimension:
 813,3x586,5x480,5(mm) - 32.02x23.09x18.92(in)

Weight:
 empty: 13,25kg - 29.22lbs
 with cubed foam: 17,43kg - 38.43lbs

Temperature rating:
 Minimum Maximum
 -40°C -40°F +80°C +176°F




TECHNICAL DRAWING

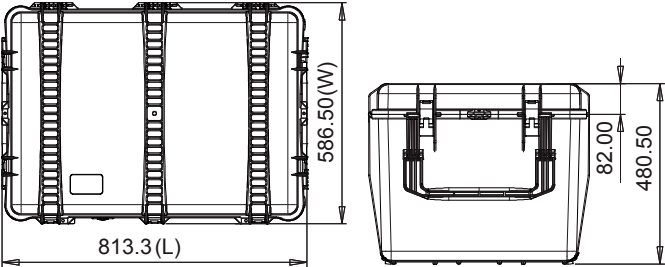

HPRC2550W for DJI Inspire 3 batteries

S-BAT2550W-05

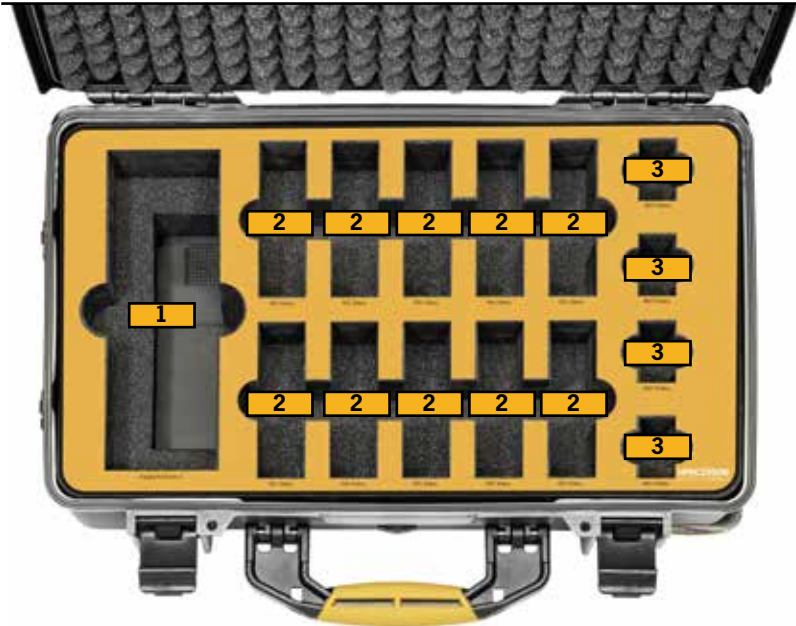

- 1 Charging Hub Inspire 3
- 2 TB51 Battery
- 3 WB37 Battery



TECHNICAL FEATURES


Dimension:
internal dimension
513x288x200(mm) - 20.19x11.34x7.87(in)
external dimension
549x346x236(mm) - 21.61x13.62x9.29(in)

Weight:
empty: 4,35kg - 9.57lbs
with cubed foam: 5,04kg - 11.10lbs

Temperature rating:
Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

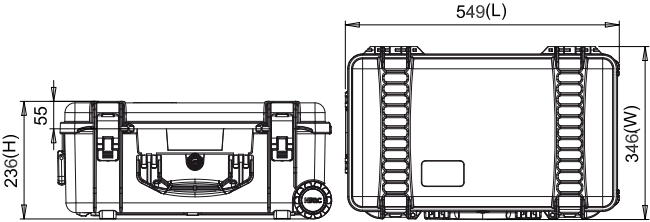

HPRC2300 for DJI Mini 4 Pro Fly More Combo with Smart Controller

S-MAVM-2300-04



- 1 DJI Mini 4 Pro Fly More Combo
- 2 Spare Propellers/Cables
- 3 Flight Batteries
- 4 Smart Controller
- 5 Two-Way Charging Hub
- 6 Intelligent Flight Battery
- 7 Miscellaneous



TECHNICAL FEATURES


Dimension:
Internal dimension:
305,7x232,4x137,5(mm) - 12.04x9.15x5.41(in)
External dimension:
334,6x303x155,2(mm) - 13.17x11.93x6.11(in)

Weight:
empty: 1,75kg - 3.86lbs
with cubed foam: 1,90kg - 4.19lbs

Temperature rating:
Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

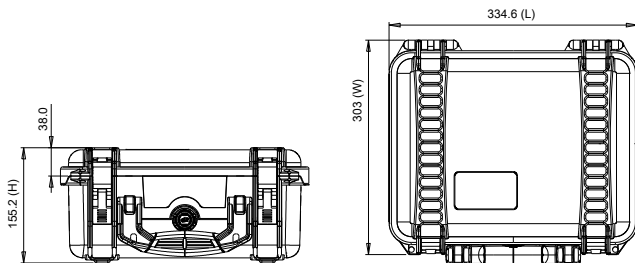

HPRC2300 for DJI Flip Fly More Combo

S-FLIP-2300-01



- 1 DJI Flip
- 2 Propellers/Cables/Screwdriver
- 3 DJI RC 2 Remote Controller
- 4 Parallel Charging Hub with Batteries



HPRC DJI FLIP FLY MORE COMBO

TECHNICAL FEATURES

Dimension:

Internal dimension
305,7x232,4x137,5(mm) - 12.04x9.15x5.41 (in)
External dimension
334,6x303x155,2(mm) - 13.17x11.93x6.11(in)

Weight:


empty: 1,75kg - 3.86lbs

Temperature rating:

Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

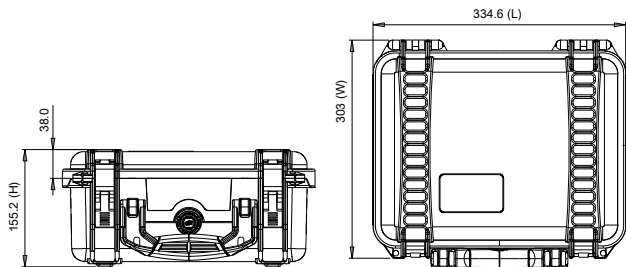

HPRC2300 for DJI Neo Fly More Combo

S-NEO-2300-01



- 1 DJI Neo
- 2 Two-Way Charging Hub with Intelligent Flight Battery
- 3 DJI RC-N3 Remote Controller
- 4 Cables & Propellers

Foam in Arplank 30: 100% recyclable and manufactured with 25% recycled content

HPRC DJI NEO FLY MORE COMBO

TECHNICAL FEATURES


Dimension:
Internal dimension
305,7x232,4x137,5(mm) - 12.04x9.15x5.41 (in)
External dimension
334,6x303x155,2(mm) - 13.17x11.93x6.11(in)

Weight:
empty: 1,75kg - 3.86lbs

Temperature rating:
Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

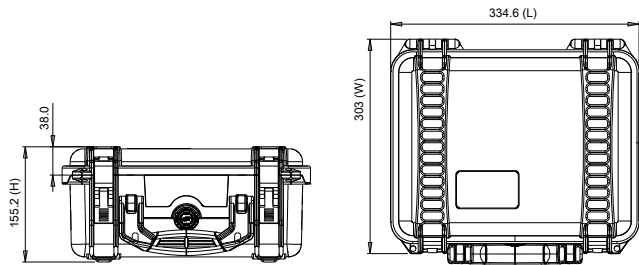

HPRC2400 for DJI Air 3 & Air 3S Fly More Combo

S-MAV3A-2400-02



- 1 DJI Air 3 & Air 3S with Gimbal Protector
- 2 ND Filters Set
- 3 Miscellaneous
- 4 Battery Charging Hub
- 5 DJI RC 2 / DJI RC-N2 or DJI RC-N3
- 6 Intelligent Flight Battery
- 7 Cables



TECHNICAL FEATURES


Dimension:
Internal dimension:
377x263,9x150,8(mm) - 14.84x10.39x5.94(in)
External dimension:
402x330,5x169,2(mm) - 15.83x13.01x6.66(in)

Weight:
empty: 2,17kg - 4.78lbs
with cubed foam: 2,58kg - 5.69lbs

Temperature rating:
Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

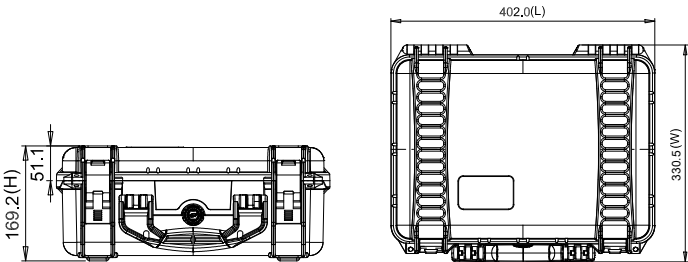

HPRC3500 DJI Air 3 & Air 3S Fly More Combo

S-MAV3A-3500-01



- 1 DJI Air 3 & Air 3S with Gimbal Protector
- 2 DJI RC 2 / DJI RC-N2 or DJI RC-N3
- 3 Cables
- 4 Intelligent Flight Battery
- 5 Propellers
- 6 Battery Charging Hub
- 7 ND Filters Set



TECHNICAL FEATURES


Dimension:
Internal dimension:
433,5x319,3x168,8(mm) - 17.07x12.57x6.65(in)
External dimension:
497,9x370,3x185(mm) - 19.60x14.58x7.28(in)

Weight:
empty: 3kg - 6.61lbs
with cubed foam: 3,55kg - 7.82lbs

Temperature rating:
Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

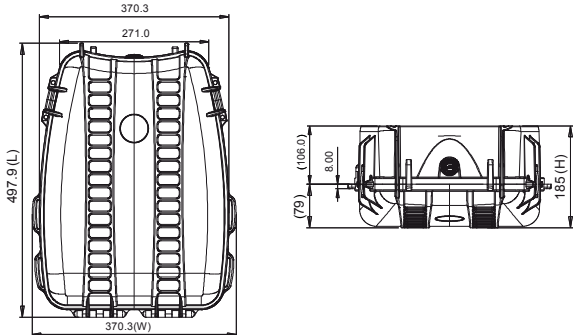

HPRC3500 for DJI Avata 2 Fly More Combo

S-AVAT2-3500-01



- 1 DJI Avata 2 Fly More Combo
- 2 Miscellaneous/ Cables
- 3 ND Filters / Cables
- 4 Goggles 3
- 5 Two-Way Charging Hub with Batteries
- 6 Controller
- 7 RC Motion 3
- 8 Propellers



TECHNICAL FEATURES


Dimension:
Internal dimension:
433,5x319,3x168,8(mm) - 17.07x12.57x6.65(in)
External dimension:
497,9x370,3x185(mm) - 19.6x14.58x7.28(in)

Weight:
empty: 3,00kg - 6.61lbs
with cubed foam: 3,55kg - 7.82lbs

Temperature rating:
Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

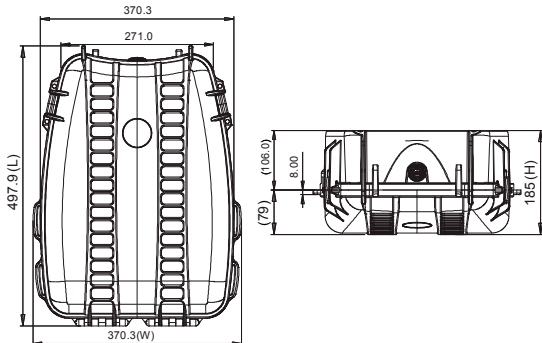



HPRC3500 for DJI Avata Pro - View Combo S-AVAT-3500-01



- 1 DJI Avata
- 2 Cable/Miscellaneous
- 3 Battery Charging Hub
- 4 Goggles 2
- 5 Intelligent Flight Battery
- 6 Eyeglass Frames (Pair)
- 7 Controller
- 8 Cable/Miscellaneous
- 9 Power Adapter
- 10 Goggles 2 Battery
- 11 Motion Controller



HPRC DJI AVATA PRO

TECHNICAL FEATURES


Dimension:
 Internal dimension:
 433,5x319,3x168,8(mm) - 17.07x12.57x6.65(in)
 External dimension:
 497,9x370,3x184,9(mm) - 19.6x14.58x7.28(in)

Weight:
 empty: 3,00kg - 6.61lbs
 with cubed foam: 3,55kg - 7.82lbs

Temperature rating:
 Minimum Maximum
 -40°C -40°F +80°C +176°F



TECHNICAL DRAWING

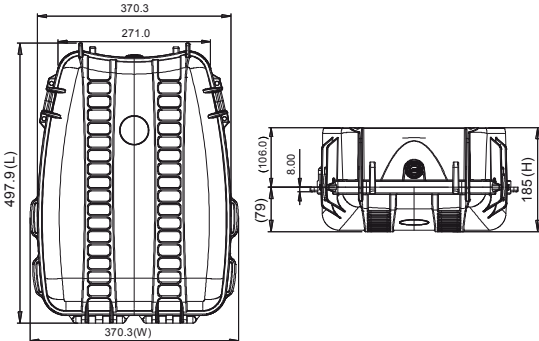

HPRC2500 for DJI FPV Combo

S-FPV-2500-01



- 1 DJI FPV Drone
- 2 Goggles Battery
- 3 Fly More kit
- 4 Goggles V2 with Goggles Antenna (or TrueRC) mounted
- 5 Remote Controller
- 6 Motion Controller
- 7 AC Power Adaptor
- 8 Intelligent Flight Battery
- 9 Propellers (Pair)/Cable



TECHNICAL FEATURES


Dimension:
internal dimension
449,8x322,9x174,9(mm) - 17.71x12.71x6.89(in)
external dimension
478,1x389,4x194(mm) - 18.82x15.33x7.64(in)

Weight:
empty: 3,22kg - 7.10lbs
with cubed foam: 3,69kg - 8.12lbs


Temperature rating:
Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

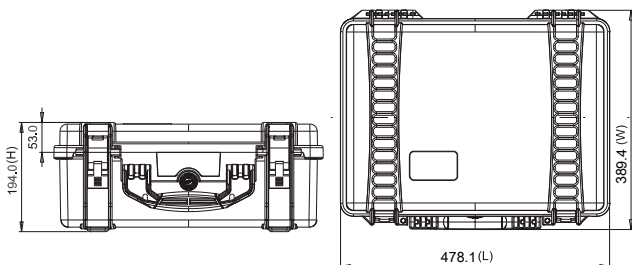

HPRC3600 for DJI FPV Combo S-FPV-3600-01

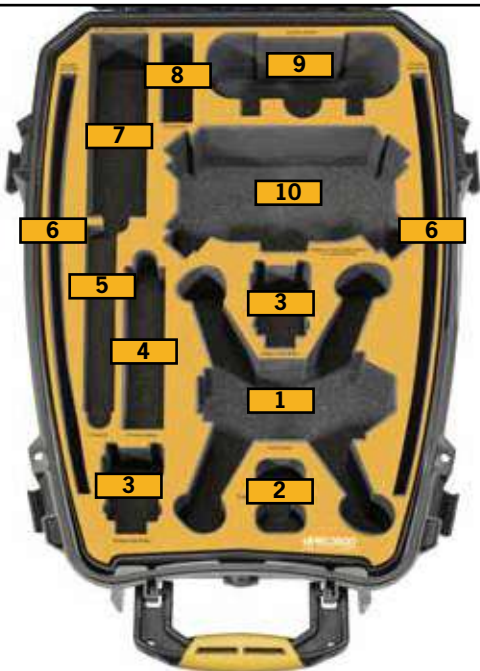

- 1 DJI FPV Drone
- 2 Goggles Battery
- 3 Intelligent Flight Battery
- 4 AC Power Adaptor
- 5 Fly More kit
- 6 Propellers (Pair)/Cable
- 7 Miscellaneous/Motion Controller
- 8 Miscellaneous
- 9 Remote Controller
- 10 Goggles V2 with Goggles Antenna (or TrueRC) mounted




TECHNICAL FEATURES

Dimension:
 Internal dimension
 479x354x194(mm) - 18.86x13.94x7.64(in)
 External dimension
 542x402x220(mm) - 21.34x15.83x8.66(in)

Weight:
 empty: 3,23 kg - 7,11 lbs
 with foam: 3,75 kg - 8,26 lbs

Temperature rating:
 Minimum Maximum
 -40°C -40°F +80°C +176°F

TECHNICAL DRAWING

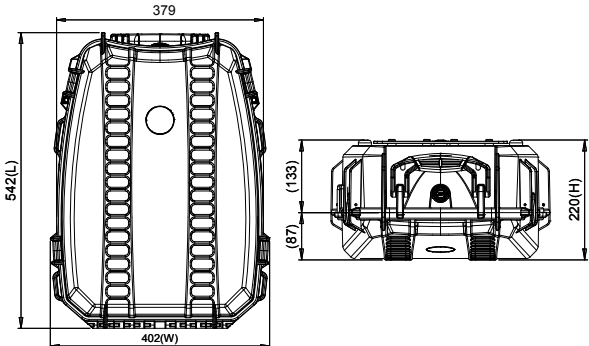

HPRC2700W for DJI Phantom 4RTK

S-PHA4RTK-2700W-01



- 1 Dji Phantom 4 RTK / Multispectral
- 2 Intelligent Flight Battery
- 3 Remote Controller
- 4 Ipad Air/Tablet Up to 10"
- 5 Hprc1100 For 8 Microsd Cards
- 6 Charging Hub for WB37
- 7 Battery WB37
- 8 Charging Hub for Int.flight Battery
- 9 AC Power Adapter / Miscellaneous Accessories
- 10 Propellers



suitable for v 2.0 low noise propellers

TECHNICAL FEATURES

Dimension:

Internal dimension
554,7x458,7x246(mm) - 21.84x18.06x9.69(in)
External dimension
617,5x527,3x279,6(mm) - 24.31x20.76x11.0(in)

Weight:


empty: 7,75kg - 17.09lbs
with cubed foam: 9,07kg - 19.99lbs

Temperature rating:

Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

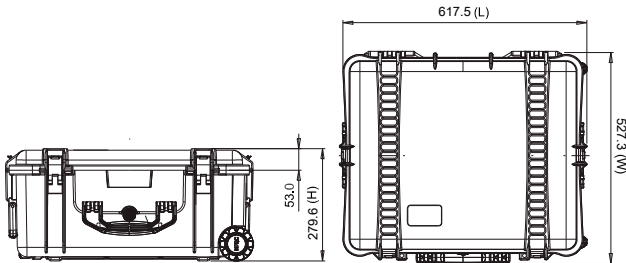

HPRC2730W for DJI Ronin 4D-6K Combo S-R4D-2730W-01



- 1 DJI Ronin 4D Mounted
- 2 Charger
- 3 Lens DL 24/35/50 mm F2.8 LS
- 4 DL Mount
- 5 MRW-G1.SYM (Sony)
- 6 DJI Prossd 1TB
- 7 Various/Miscellaneous
- 8 DJI High-Bright Remote Monitor
- 9 DJI Zenmuse X9 Counterweight
- 10 CF Express Type B
- 11 NP-F970 (Sony)
- 12 TB50 Intelligent Flight Battery
- 13 Various/Miscellaneous



TECHNICAL FEATURES


Dimension:
 Internal dimension
 503x459x316(mm) - 19.80x18.07x12.44(in)
 External dimension
 616,9x531x349,6(mm) - 24.29x20.91x13.76(in)

Weight:
 empty: 8,41kg - 18.54lbs
 with cubed foam: 10,43kg - 22.99lbs

Temperature rating:
 Minimum Maximum
 -40°C -40°F +80°C +176°F



TECHNICAL DRAWING

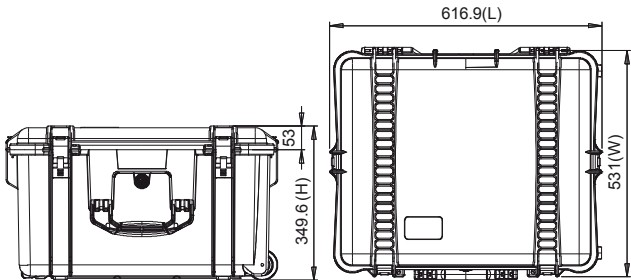


HPRC2600 for DJI RS 4 Pro Combo

S-RS4-2600-01



- 1 Gimbal
- 2 Focus Pro Motor
- 3 Ronin Image Transmitter
- 4 BG30 Grip with Extended Grip / Tripod
- 5 Briefcase Handle

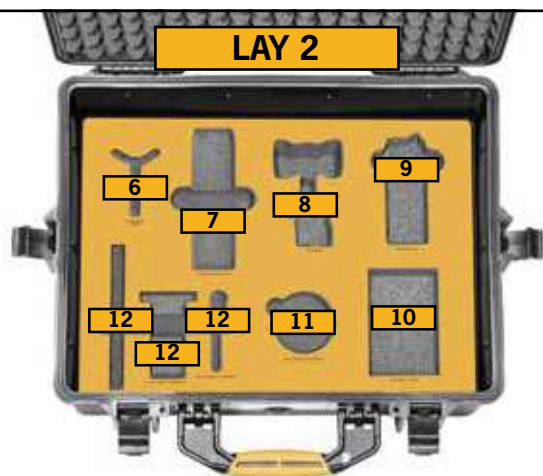

- 6 Lens-Fastening Support
- 7 Lower Quick-Release Plate
- 8 Phone Holder
- 9 Quick-Release Plate
- 10 Miscellaneous / Cables
- 11 Focus Gear Strip / Miscellaneous
- 12 Focus Pro Motor / Rod Mount Kit



HPRC DJI RS 4 PRO COMBO


TECHNICAL FEATURES

Dimension:
Internal dimension:
482,4x358,3x198,1(mm) - 18.99x14.10x7.80(in)
External dimension:
543,4x426,8x218,1(mm) - 21.39x16.80x8.59(in)


Weight:
empty: 4,25kg - 9.37lbs
with cubed foam: 5,05kg - 11.13lbs

Temperature rating:
Minimum Maximum
-40°C -40°F +80°C +176°F

TECHNICAL DRAWING

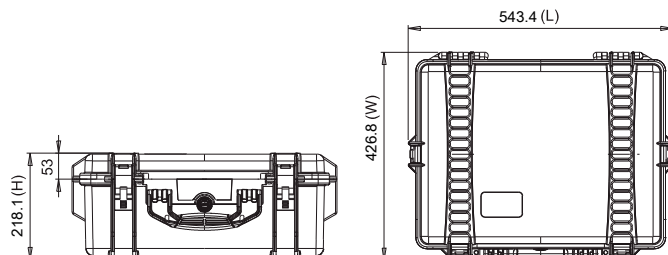

HPRC2600 for DJI RS 3 Pro Combo S-RS3-2600-01

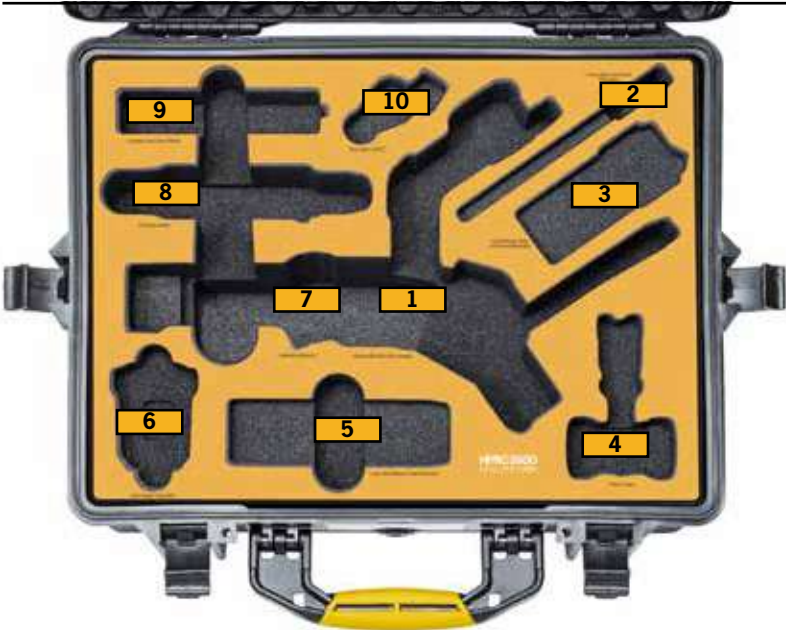

- 1 Gimbal with BG30 Grip mounted
- 2 Focus Motor Rod Mount Kit Combo
- 3 Quick-Release Plate (Arca-Swiss/Manfrotto)
- 4 Phone Holder
- 5 Lower Quick-Release Plate (Extended)
- 6 Ronin Image Transmitter
- 7 Cable/Miscellaneous
- 8 Briefcase Handle
- 9 Extended Grip/Tripod (Metal)
- 10 Focus Motor (2022)




TECHNICAL FEATURES

Dimension:
 Internal dimension
 482,4x358,3x198,1(mm) - 18.99x14.10x7.80(in)
 External dimension
 543,4x426,8x218,1(mm) - 21.39x16.8x8.59(in)

Weight:
 empty: 4,25kg - 9.37lbs
 with cubed foam: 5,05kg - 11.13lbs

Temperature rating:
 Minimum Maximum
 -40°C -40°F +80°C +176°F

TECHNICAL DRAWING

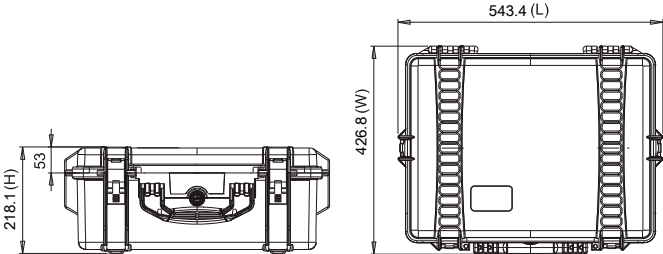

HPRC2300 for DJI RS 3 Mini Creator Combo

S-RS3M-2300-01



- 1 Gimbal
- 2 Mic Charging Case
- 3 Various/cable
- 4 Mini Tripod



TECHNICAL FEATURES

Dimension:

Internal dimension
305,7x232,4x137,5(mm) - 12.04x9.15x5.41 (in)
External dimension
334,6x303x155,2(mm) - 13.17x11.93x6.11(in)

Weight:


empty: 1,75kg - 3.86lbs
with foam: 1,90kg - 4.19lbs

Temperature rating:

Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

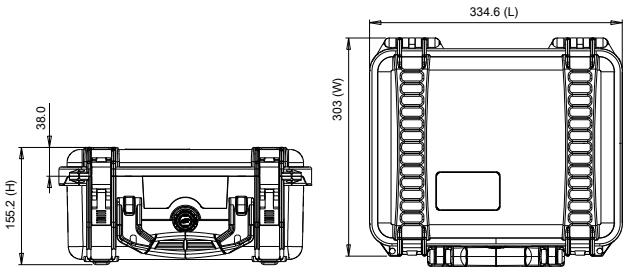

HPRC1400 for DJI Pocket 2 Creative Combo Kit S-OSMPKT-1400-02



- 1 DJI Pocket 2 with 1/4"-20 Tripod Mounted
- 2 Micro Tripod
- 3 Mini Control Stick
- 4 Cable/Wireless Microphone Windscreen
- 5 Do-it-All Handle
- 6 Wireless Microphone Transmitter/SD Card
- 7 Wide-Angle Lens
- 8 Lightning (iOS) Smartphone Adapter/ USB Type-C Smartphone Adapter



TECHNICAL FEATURES


Dimension:
internal dimension
180x110x40(mm) - 7.08x4.33x1.57(in)
external dimension
200,3x142,4x48(mm) - 7.89x5.61x1.89(in)

Weight:
empty: 0,26kg - 0.57lbs

Temperature rating:
Minimum Maximum
-40°C -40°F +80°C +176°F




TECHNICAL DRAWING

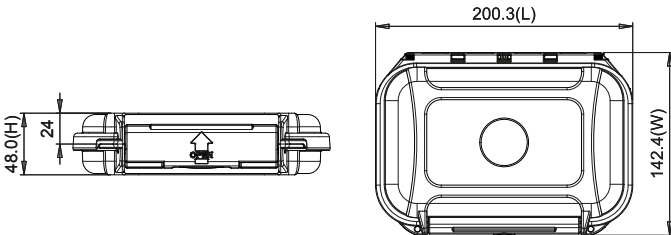

HPRC1400 for DJI Osmo Pocket 3 Creator Combo

S-OSMPKT-1400-03

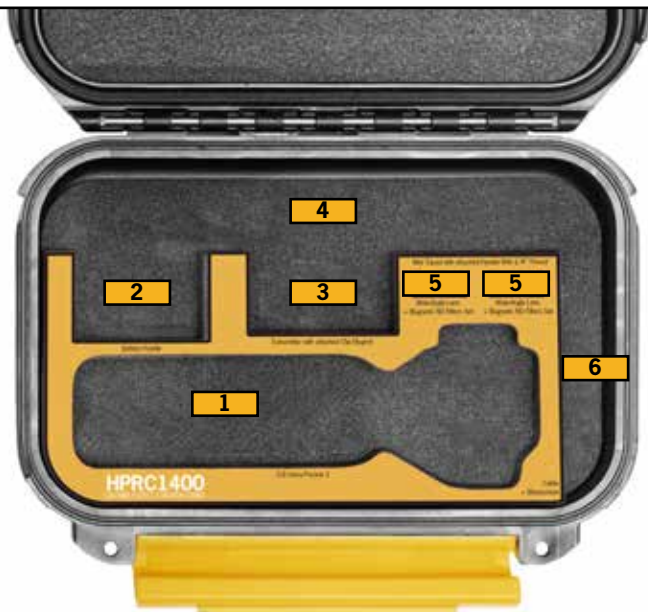

- 1 DJI Osmo Pocket 3
- 2 Battery Handle
- 3 Transmitter with attached Clip Magnet
- 4 Mini Tripod with attached Handle With 1/4" Thread
- 5 Wide-Angle Lens + Magnetic ND Filters Set
- 6 Cable + Windscreen



TECHNICAL FEATURES


Dimension:
Internal dimension:
180x110x40(mm) - 7.08x4.33x1.57(in)
External dimension:
200,3x142,4x48(mm) - 7.89x5.61x1.89(in)

Weight:
empty: 0,26kg - 0.57lbs

Temperature rating:
Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

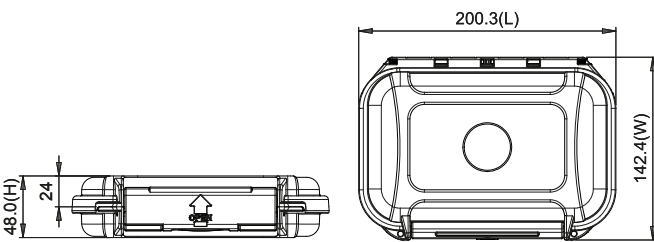

HPRC DJI OSMO POCKET 3 CREATOR COMBO



AUTEL ROBOTICS

HPRC READY MADE SOLUTIONS – 2025

HPRC2460 for Autel Robotics Evo Lite+ Premium Bundle S-LITE-2460-01



- 1 Aircraft (including battery, propellers and gimbal cover)
- 2 Multi-Charger
- 3 Spare Propellers
- 4 Power Adapter
- 5 Cable
- 6 Spare Battery
- 7 Remote Control
- 8 Filter Set
- 9 Usb Cable



TECHNICAL FEATURES

Dimension:

Internal dimension
 409x306x175(mm) - 16.10x12.05x6.89(in)
 External dimension
 435x377,8x193(mm) - 17.13x14.87x7.60(in)

Weight:


empty: 2,55kg - 5.62lbs
 with cubed foam: 3,14kg - 6.92lbs

Temperature rating:

Minimum Maximum
 -40°C -40°F +80°C +176°F



TECHNICAL DRAWING

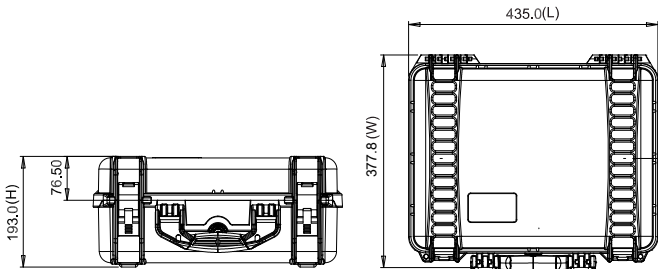

HPRC2300 for Autel Robotics Evo Nano+ Premium Bundle

S-NANO-2300-01



- 1 Autel Evo Nano+ including battery, propellers, gimbal cover and propeller holder
- 2 Spare Propellers
- 3 Spare Battery
- 4 Remote Control
- 5 Cables/Miscellaneous
- 6 Power Adapter
- 7 Multi-Charger



HPRC AUTEL ROBOTICS EVO NANO+

TECHNICAL FEATURES


Dimension:
Internal dimension
305,7x232,4x137,5(mm) - 12.04x9.15x5.41 (in)
External dimension
334,6x303x155,2(mm) - 13.17x11.93x6.11(in)

Weight:
empty: 1,70kg - 3.75lbs
with foam: 1,9kg - 4.19lbs

Temperature rating:
Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

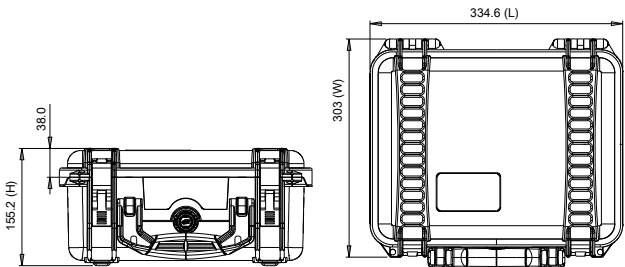

HPRC2400 Autel Robotics Evo II 6K / 8K Drone S-EV02-2400-02





- Autel Robotics Evo II 6K / 8K with propellers - low noise
- Remote Controller
- Battery Charging Hub
- Flight Battery
- Cable/Propellers/Accessories
- Micro USB Cable
- Charger



TECHNICAL FEATURES


Dimension:
 Internal dimension
 377x263,9x150,8(mm) - 14.84x10.39x5.94(in)
 External dimension
 402x330,5x169,2(mm) - 15.83x13.01x6.66(in)

Weight:
 empty: 2,38kg - 5.25lbs

Temperature rating:
 Minimum Maximum
 -40°C -40°F +80°C +176°F



TECHNICAL DRAWING

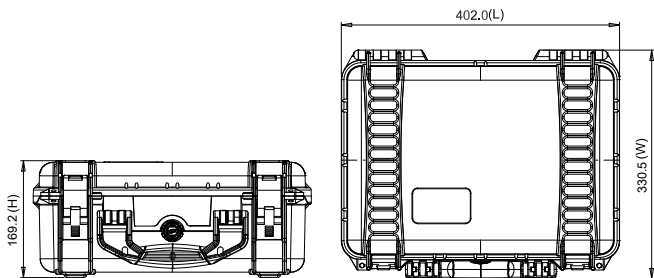

HPRC AUTEL ROBOTICS EVO II



ATOMOS

HPRC READY MADE SOLUTIONS – 2025

HPRC2300 for Atomos Ninja Ultra, Ninja or Ninja V S-NJAV-2300-01



- 1 Atomos Ninja Ultra, Ninja or Ninja V with AtomX SSD mini and battery assembled on drone
- 2 Ninja Sunhood
- 3 Battery
- 4 12V-3A AC Power Supply
- 5 Cables/Miscellaneous
- 6 3 Master Caddy II
- 7 Docking Station
- 8 Battery Eliminator
- 9 Fast Charger



HPRC ATOMOS NINJA ULTRA, NINJA OR NINJA V

TECHNICAL FEATURES


Dimension:
 Internal dimension
 305,7x232,4x137,5(mm) - 12.04x9.15x5.41(in)
 External dimension
 334,6x303x155,2(mm) - 13.17x11.93x6.11(in)

Weight:
 empty: 1,75kg - 3.86lbs
 with cubed foam: 1,90kg - 4.19lbs

Temperature rating:
 Minimum Maximum
 -40°C -40°F +80°C +176°F



TECHNICAL DRAWING

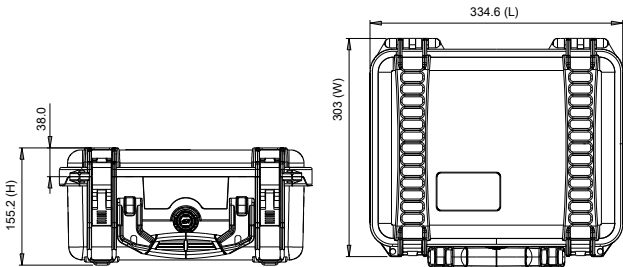

HPRC2400 for Atomos Shogun, Shogun Ultra and Shogun Connect **S-SHGC-2400-01**



- 1** Atomos Shogun, Shogun/Ultra/Connect with Antennas Mounted
- 2** Adaptor/Miscellaneous
- 3** Various
- 4** Battery NP-F960
- 5** Master Caddy
- 6** Battery NP-F750
- 7** Charger
- 8** Docking Station
- 9** Charger



TECHNICAL FEATURES


Dimension:
 Internal dimension:
 377x263,9x150,8(mm) - 14.84x10.39x5.94(in)
 External dimension:
 402x330,5x169,2(mm) - 15.83x13.01x6.66(in)

Weight:
 empty: 2,17kg - 4.78lbs
 with cubed foam: 2,58kg - 5.69lbs

Temperature rating:
 Minimum Maximum
 -40°C -40°F +80°C +176°F



TECHNICAL DRAWING

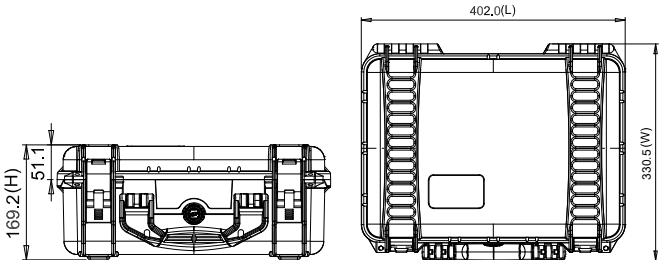

HPRC2730W for Atomos Sumo19"/ Sumo19" SE S-SM19-2730W-01



- 1 Atomos Sumo 19"/ Sumo19" SE Monitor Recorder
- 2 Atomos Sunhood



- 3 Charger
- 4 3 Master caddy II
- 5 DM-130A Gold Mount Mini Battery or similar
- 6 D-4BA Battery Extender or similar

TECHNICAL FEATURES


Dimension:
 internal dimension
 503x459x316(mm) - 19.80x18.07x12.44(in)
 external dimension
 616,9x531x349,6(mm) - 24.29x20.91x13.76(in)


Weight:
 empty: 8,41kg - 18.54lbs
 with cubed foam: 10,43kg - 22.99lbs

Temperature rating:
 Minimum Maximum
 -40°C -40°F +80°C +176°F



TECHNICAL DRAWING

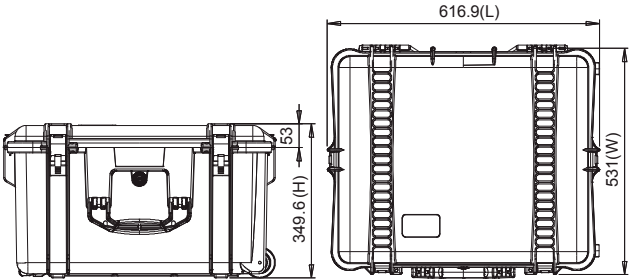

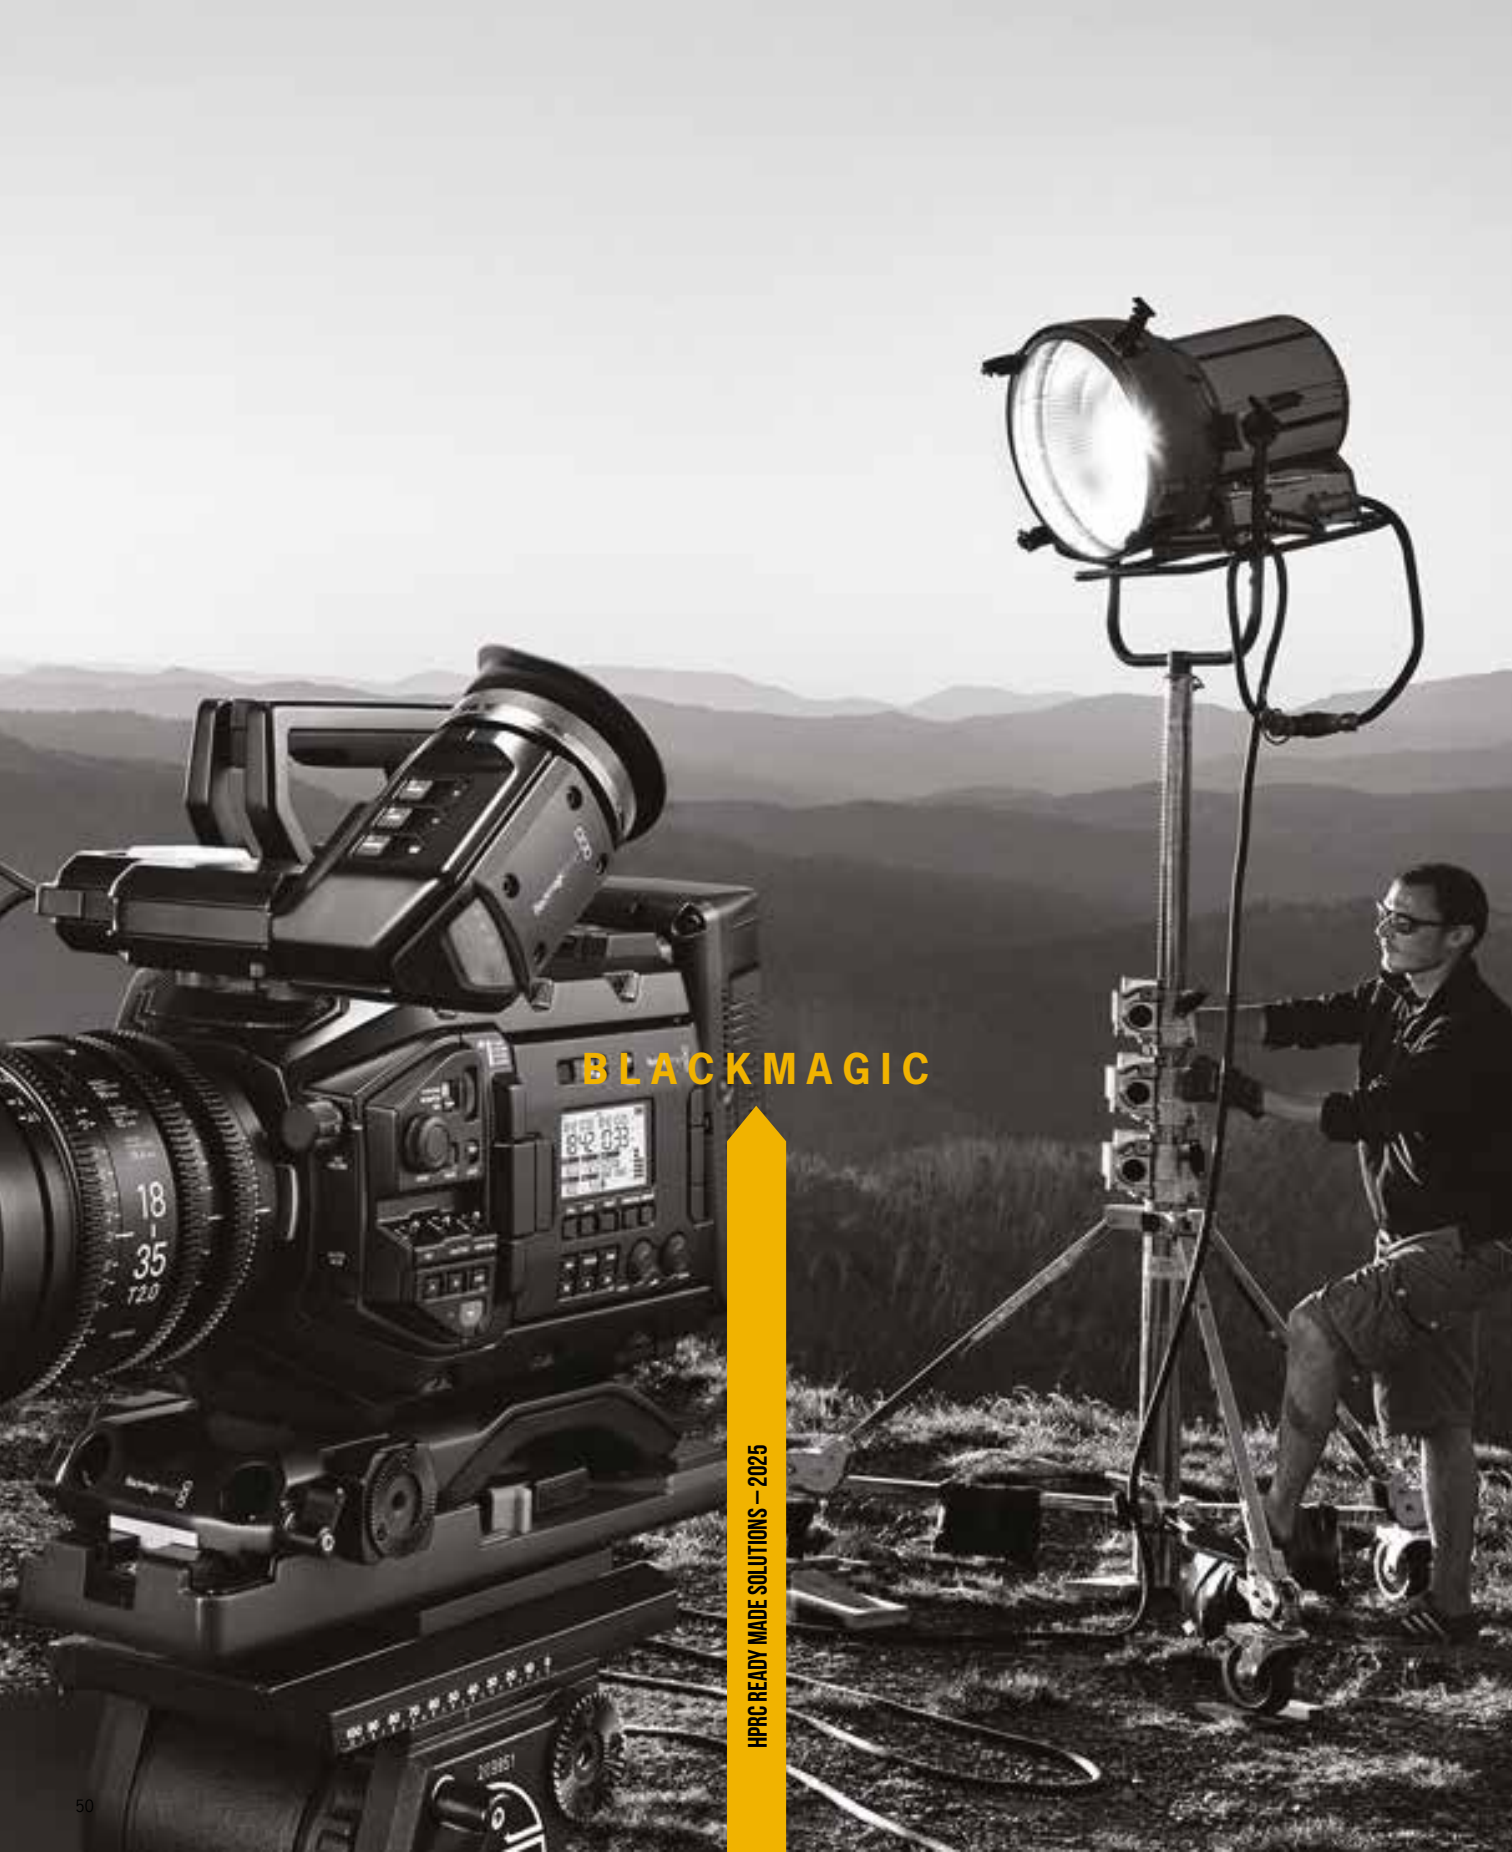

BLACKMAGIC

HPRC READY MADE SOLUTIONS — 2025

HPRC2400 for Blackmagic Pocket Cinema Camera 6K Pro or Blackmagic Cinema Camera 6K S-PKT6P-2400-01



- 1 Blackmagic Pocket Cinema Camera 6K Pro / Cinema Camera 6K with or without professional cage
- 2 Lenses: Diameter Max 90mm × Length Max 220mm
- 3 International Adapters
- 4 NP-F570 Battery
- 5 30W power supply
- 6 HPRC1100MEM



TECHNICAL FEATURES


Dimension:
 Internal dimension:
 377x263,9x150,8(mm) - 14.84x10.39x5.94(in)
 External dimension:
 402x330,5x169,2(mm) - 15.83x13.01x6.66(in)

Weight:
 empty: 2,17kg - 4.78lbs

Temperature rating:
 Minimum Maximum
 -40°C -40°F +80°C +176°F



TECHNICAL DRAWING

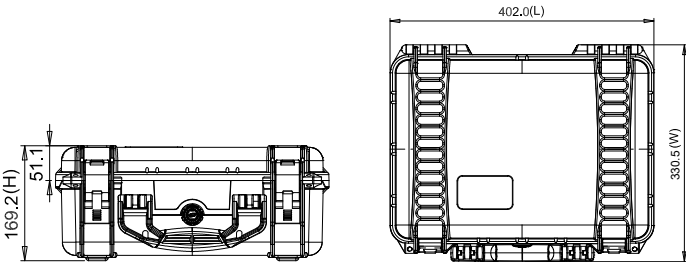

HPRC BLACKMAGIC POCKET CINEMA CAMERA 6K PRO / CINEMA CAMERA 6K

HPRC2400 Combo for Blackmagic Pocket Cinema Camera 6K or 4K

S-PKTC-2400-01



- 1 Cinema Blackmagic Pocket 4K or 6K with or without professional cage and Metabones mounted
- 2 Lenses: Diameter Max 90mm × Length Max 220mm
- 3 International Adapters
- 4 LP-E6 Battery
- 5 30W power supply
- 6 HPRC1100MEM

TECHNICAL FEATURES


Dimension:
 Internal dimension
 377x263,9x150,8(mm) - 14.84x10.39x5.94(in)
 External dimension
 402X330,5X169,2(mm) - 15.83x13.01x6.66(in)

Weight:
 empty: 2,23kg - 4.91lbs
 with cubed foam: 2,55kg - 5.62lbs

Temperature rating:
 Minimum Maximum
 -40°C -40°F +80°C +176°F



TECHNICAL DRAWING

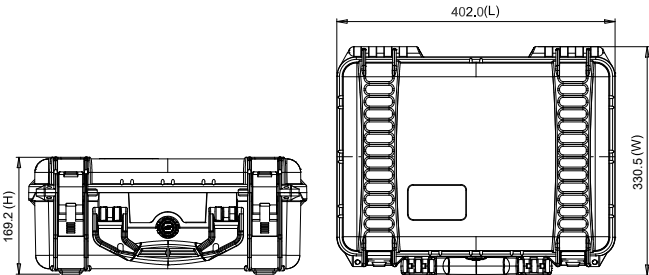

HPRC5200 for Blackmagic Studio Camera 6K Pro/4K Pro G2/4K Plus S-BMS-5200-01



- 1 Blackmagic Studio Camera 6K PRO/4K PRO G2/4K PLUS
- 2 Charger + Adaptor
- 3 Tripod Plate
- 4 3x Camera Numbers



☆ Additional foam inserts for BM Studio Camera 4k PRO G2 / 4K PLUS


TECHNICAL FEATURES

Dimension:
Internal dimension
772x302x210(mm) - 30.39x11.89x8.26(in)
External dimension:
802x355x246,7(mm) - 31.57x13.97x9.71(in)

Weight:
empty: 5,05kg - 11.10lbs
with cubed foam: 6,20kg - 13.70lbs

Temperature rating:
Minimum Maximum
-40°C -40°F +80°C +176°F

TECHNICAL DRAWING

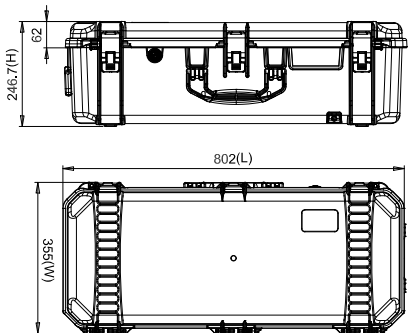

HPRC BLACKMAGIC STUDIO CAMERA 6K PRO/4K PRO G2/4K PLUS

HPRC2760W for Blackmagic Design Atem
 Television Studio 4K8 /HD8 /HD8 ISO
 + ATEM Microphone Converter
S-ATS-2760W-01



- 1
- 2
- Atem Television Studio 4K8 / HD8 / HD8 ISO
- Atem Microphone Converter



TECHNICAL FEATURES



Dimension:
 Internal dimension
 690x450x301(mm) - 27.16x17.72x11.85(in)
 External dimension:
 750x511x329(mm) - 29.53x20.12x12.95(in)

Weight:
 empty: 8,93kg - 19.69lbs
 with cubed foam: 10,72kg - 23.63lbs

Temperature rating:
 Minimum Maximum
 -40°C -40°F +80°C +176°F




TECHNICAL DRAWING



HPRC2760W for Ursa Broadcast G2

S-UG2-2760W-01

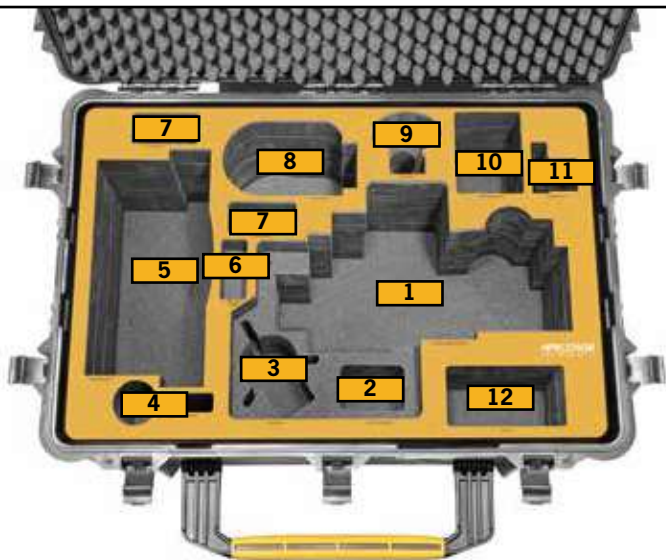

- 1 Ursa Broadcast G2 with Handle
- 2 Screws/Miscellaneous
- 3 Focus Demand
- 4 Microphone with Mount
- 5 Studio Viewfinder G2
- 6 HPRC 1100 CFE BLB cards holder
- 7 Camera Clamp
- 8 Lens with Grip
- 9 Zoom Handle
- 10 Power Adapter/Cables
- 11 Viewfinder Mount
- 12 Lens Cover



HPRC BLACKMAGIC URSA BROADCAST G2

TECHNICAL FEATURES

Dimension:

Internal dimension
690x450x301(mm) - 27.16x17.72x11.85(in)
External dimension:
750x511x329(mm) - 29.53x20.12x12.95(in)

Weight:



empty: 8,93kg - 19.69lbs

Temperature rating:

Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING



HPRC2710 for Blackmagic Design Atem Camera Control Panel S-ACCP-2710-01



1 Atem Camera Control Panel



TECHNICAL FEATURES

Dimension:

Internal dimension
555x459x256(mm) - 21.85x18.07x10.08(in)
External dimension
617x525x280(mm) - 24.29x20.67x11.02(in)


Weight:

empty: 6,56kg - 14.46lbs
with cubed foam: 7,96kg - 17.55lbs

Temperature rating:

Minimum Maximum
-40°C -40°F +80°C +176°F

TECHNICAL DRAWING

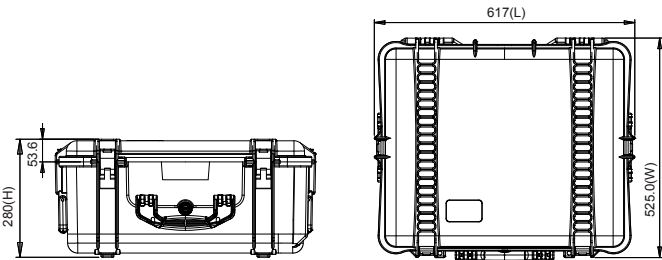

HPRC2500 for Atem Mini Extreme and Atem Mini Extreme ISO

S-AME-2500-01



- 1 Atem Mini Extreme/Mini Extreme ISO
- 2 Miscellaneous
- 3 Charger
- 4 Blackmagic Atem Streaming Bridge
- 5 Angelbird SSD2GO
- 6 HDMI cables/Miscellaneous



TECHNICAL FEATURES

Dimension:

internal dimension
449,8x322,9x174,9(mm) - 17.71x12.71x6.89(in)
external dimension
478,1x389,4x194(mm) - 18.82x15.33x7.64(in)

Weight:


empty: 3,08kg - 6.79lbs
with cubed foam: 3,71kg - 8.18lbs

Temperature rating:

Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

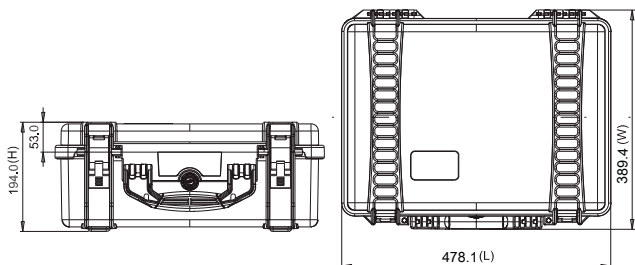

HPRC ATEM MINI EXTREME / EXTREME ISO

HPRC2710 for Blackmagic Atem 1 M/E

S-ADV1-2710-01



1 Blackmagic Design Atem 1 M/E Advanced Panel




TECHNICAL DRAWING

TECHNICAL FEATURES

Dimension:
internal dimension
555x459x256(mm) - 21.85x18.07x10.08(in)
external dimension
617x525x280(mm) - 24.29x20.67x11.02(in)

Weight:
empty: 6,43 kg - 14.18 lbs
with foam: 7,45 kg - 16.42 lbs

Temperature rating:
Minimum Maximum
-40°C -40°F +80°C +176°F

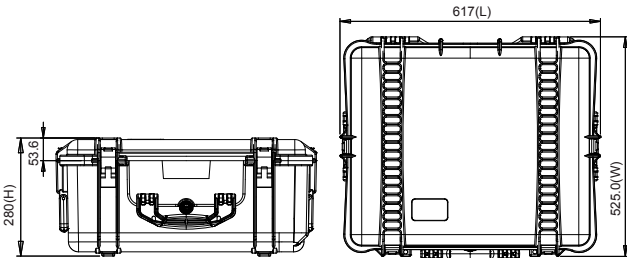

HPRC2730W for Blackmagic Ursa Mini Pro/Broadcast

S-URS2730W-03



HPRC BLACKMAGIC URSA MINI PRO

TECHNICAL FEATURES

Dimension:

internal dimension
503x459x316(mm) - 19.80x18.07x12.44(in)
external dimension
616,9x531x349,6(mm) - 24.29x20.91x13.76(in)

Weight:


empty: 8,41kg - 18.54lbs
with cubed foam: 10,43kg - 22.99lbs

Temperature rating:

Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

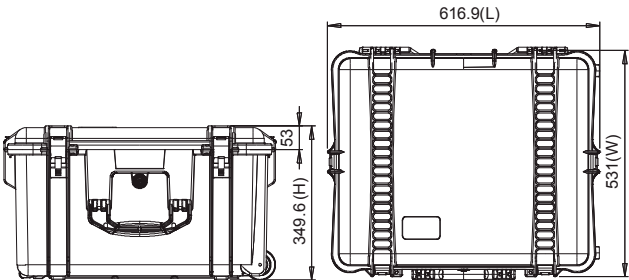



SONY

HPRC READY MADE SOLUTIONS – 2025

HPRC2400 for Sony FX3 S-FX3-2400-01



- 1 Sony FX3
- 2 Lenses: Diameter Max 90mm × Length Max 220mm
- 3 XLR Handle Unit
- 4 Battery Charger BC-QZ1
- 5 Battery NP-FZ100
- 6 Cable



TECHNICAL FEATURES


Dimension:
 Internal dimension
 377x263,9x150,8(mm) - 14.84x10.39x5.94(in)
 External dimension
 402X330,5X169,2(mm) - 15.83x13.01x6.66(in)

Weight:
 empty: 2,49kg - 5.48lbs
 with cubed foam: 3,20kg - 7.04lbs


Temperature rating:
 Minimum Maximum
 -40°C -40°F +80°C +176°F



TECHNICAL DRAWING

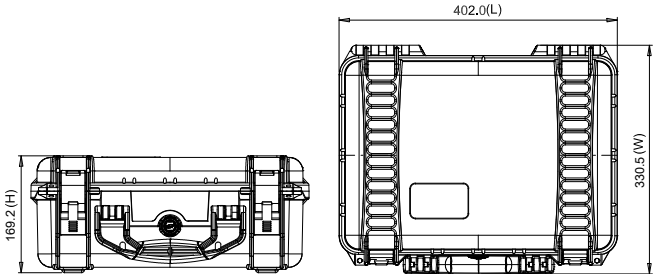

HPRC2550W for Sony ILME-FX6 S-FX6-2550W-01

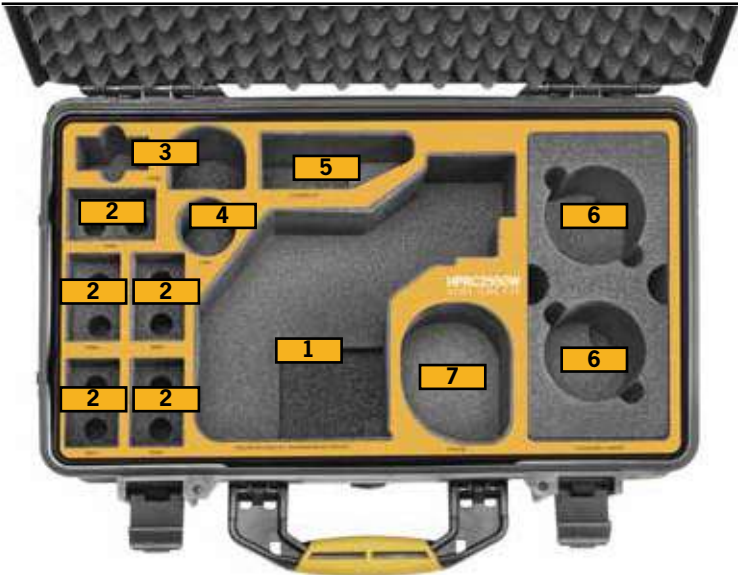

- 1 Sony ILME-FX6 Cinema Line + Smart Handle
- 2 BP-U35 or BP-U100 Battery
- 3 Charger
- 4 Cables
- 5 LCD Monitor 3,5"
- 6 2x Lenses GM or x Tele GM
- 7 Smart Grip



TECHNICAL FEATURES


Dimension:
 internal dimension
 513x288x200(mm) - 20.19x11.34x7.87(in)
 external dimension
 549x346x236(mm) - 21.61x13.62x9.29(in)

Weight:
 empty: 4,35kg - 9.57lbs
 with foam: 5,04kg - 11.10 lbs

Temperature rating:
 Minimum Maximum
 -40°C -40°F +80°C +176°F



TECHNICAL DRAWING

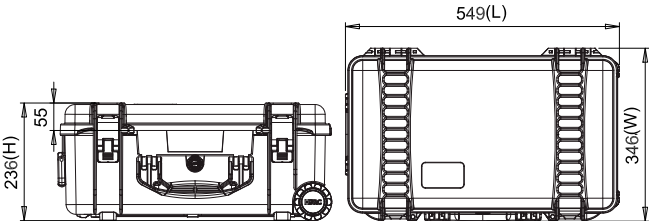

HPRC2700W for Sony PXW-FX9 S-FX9-2700W-01



- 1 Sony Camcorder
- 2 Viewfinder LCD
- 3 External Microphone
- 4 Battery Sony BP-U Series
- 5 Lens Adapter Metabones
- 6 Sony XQD/SD Card
- 7 Canon CINE Prime Lens
- 8 Cine Lenses up to 105mm Ø
- 9 Photo Lenses up to 105mm Ø
- 10 Hand Grip
- 11 Cable
- 12 Charger
- 13 HPRC1100 MEMBLB



TECHNICAL FEATURES


Dimension:
 Internal dimension
 554,7x458,7x246(mm) - 21.84x18.06x9.69(in)
 External dimension
 617,5x527,3x279,6(mm) - 24.31x20.76x11.0(in)

Weight:
 empty: 7,75kg - 17.09lbs
 with cubed foam: 9,07kg - 19.99lbs

Temperature rating:
 Minimum Maximum
 -40°C -40°F +80°C +176°F



TECHNICAL DRAWING

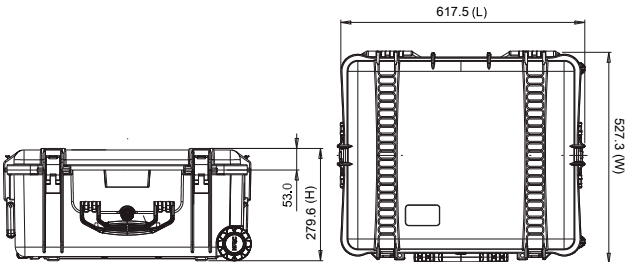



HPRC2700W for Sony Burano 8K Camera Cinema Line **S-BRN-2700W-01**



- 1 Sony Burano 8K Camera with Handle (3 options) & PL mount
- 2 Viewfinder with Mounted LCD Monitor
- 3 Accessories
- 4 Remote Control Grip GP-VR100
- 5 HPRC 1300 CFEBLB Cards Holder
- 6 Batteries
- 7 Miscellaneous / Card Reader



HPRC SONY BURANO 8K CAMERA CINEMA LINE

TECHNICAL FEATURES


Dimension:
 Internal dimension
 554,7x458,7x246(mm) - 21.84x18.06x9.69(in)
 External dimension:
 617,5x527,3x279,6(mm) - 24.31x20.76x11(in)

Weight:
 empty: 7,75kg - 17.09lbs
 with cubed foam: 9,07kg - 19.99lbs

Temperature rating:
 Minimum Maximum
 -40°C -40°F +80°C +176°F



TECHNICAL DRAWING

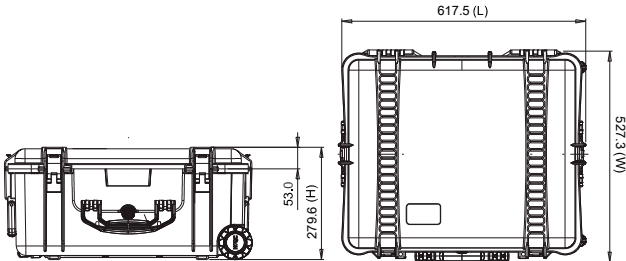

HPRC2600W for Sony PXW-Z280

S-Z280-2600W-01



- 1 Sony Camcorder PXW-Z280
- 2 Cables/Accessories/Miscellaneous
- 3 Battery Sony BPU – U60
- 4 Compact 4K Wide Conversion
- 5 Microphone



TECHNICAL FEATURES

Dimension:

Internal dimension
482,4x358,3x217,6(mm) - 18.99x14.1x8.57(in)
External dimension
546,9x426,8x250,7(mm) - 21.53x16.8x9.87(in)

Weight:


empty: 6,05kg - 13.34lbs
with cubed foam: 6,97kg - 15.37lbs

Temperature rating:

Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

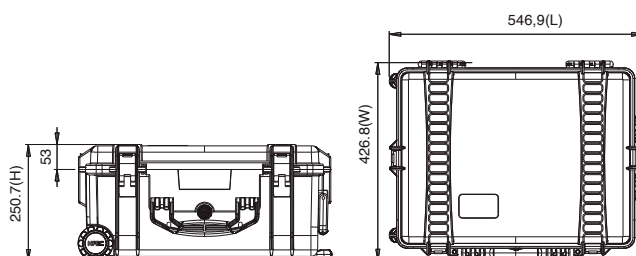

HPRC2700W for Sony PXW-Z190V

S-Z190-2700W-01



- 1 Sony Camcorder PXW-Z190VC
- 2 BC-U1 battery charger
- 3 Battery Sony BPU \Swit S-8U63
- 4 Microphone
- 5 Wireless Audio Set Sony UWP-D11/K51PRO
- 6 Cables/Accessories/Miscellaneous



HPRC SONY PXWZ190V

TECHNICAL FEATURES


Dimension:
Internal dimension
554,7x458,7x246(mm) - 21.84x18.06x9.69(in)
External dimension
617,5x527,3x279,6(mm) - 24.31x20.76x11.0(in)

Weight:
empty: 7,75kg - 17.09lbs
with cubed foam: 9,07kg - 19.99lbs

Temperature rating:
Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

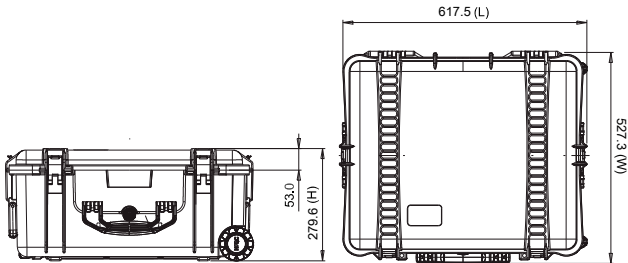




CANON

HPRC READY MADE SOLUTIONS – 2025

HPRC2500 for Canon Eos C80

S-C80-2500-01

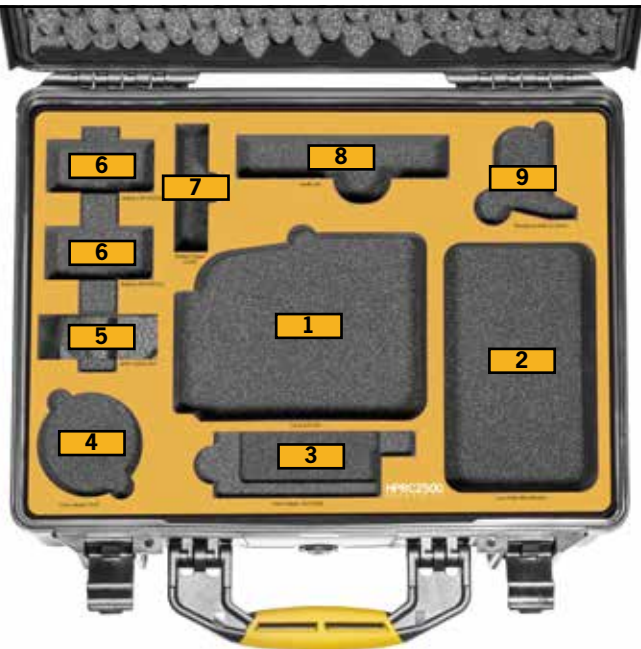

- 1 Canon Eos C80
- 2 Lens Holder/Miscellaneous
- 3 Power Adapter CA - CP300B
- 4 Canon Adapter PL - EF
- 5 HPRC1300CFEBLB
- 6 Batteries BP - A30N (2x)
- 7 Battery Charger CG - A20
- 8 Handle Unit
- 9 Microphone Holder & Screws



TECHNICAL FEATURES


Dimension:
Internal dimension:
449,8x322,9x174,9(mm) - 17.71x12.71x6.89(in)
External dimension:
478,1x389,4x194(mm) - 18.82x15.33x7.64(in)

Weight:
empty: 3,08kg - 6.79lbs
with cubed foam: 3,71kg - 8.18lbs

Temperature rating:
Minimum Maximum
-40°C -40°F +80°C +176°F




TECHNICAL DRAWING

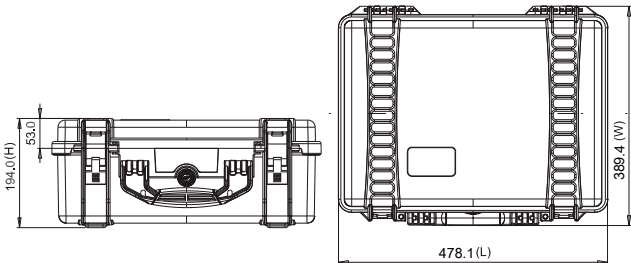

HPRC CANON EOS C400

HPRC2700W for Canon Eos C400

S-C400-2700W-01

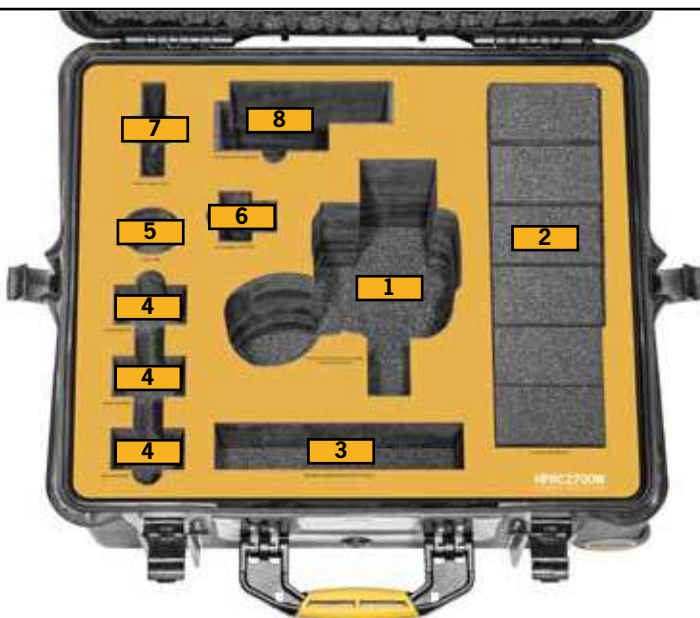

- 1 Canon Eos C400 with mounted Handle, Camera Grip & Battery
- 2 Lens Holder/Miscellaneous
- 3 Microphone Holder/ Monitor Cable/Hex Wrench
- 4 Batteries BP-A60N
- 5 Charger Cable
- 6 Power Adapter CA-CP300B
- 7 Battery Charger CG-A20
- 8 LCD Monitor & Attachment Unit



TECHNICAL FEATURES


Dimension:
Internal dimension
554,7x458,7x246(mm) - 21.84x18.06x9.69(in)
External dimension:
617,5x527,3x279,6(mm) - 24.31x20.76x11(in)

Weight:
empty: 7,75kg - 17.09lbs

Temperature rating:
Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

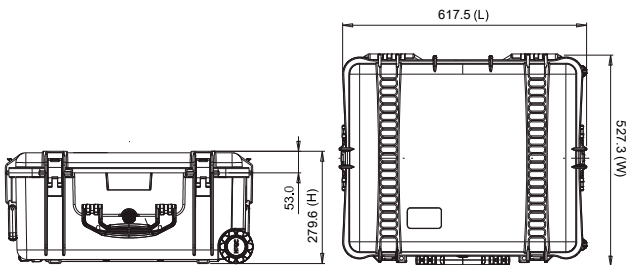

HPRC2700W for Canon Eos C300 Mark III /
Eos C500 Mark II
S-C300-2700W-01



- 1 Eos C300 Mark III / Eos C500 Mark II Body
- 2 Lens CN-E18-80
- 3 Lens 110/90 mm diameter, depth 180mm
- 4 Monitor
- 5 Handle
- 6 Charger
- 7 Various/Cable
- 8 Battery BP-A30/BP-A60
- 9 Charger
- 10 HPRC1100MEM



HPRC EOS C300 Mark III / EOS C500 Mark II

TECHNICAL FEATURES

Dimension:

Internal dimension
554,7x458,7x246(mm) - 21.84x18.06x9.69(in)
External dimension
617,5x527,3x279,6(mm) - 24.31x20.76x11.0(in)

Weight:


empty: 7,75kg - 17.09lbs

Temperature rating:

Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

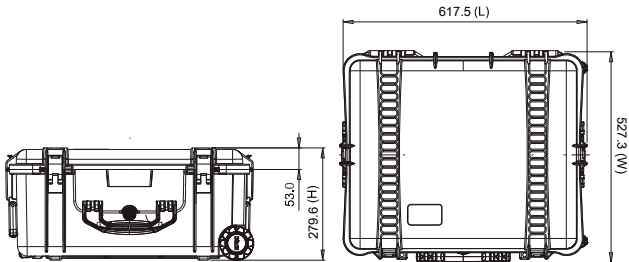



HPRC2600 for Canon Eos C70

S-C70-2600-01



- 1 Canon Eos C70
- 2 Batteries BP-A60/BP-A30
- 3 Lens Canon RF 24-105 or similar
- 4 Lens Canon RF 15-35 or similar
- 5 Lens Canon RF 70-200 or similar
- 6 Lens Canon RF 24-70 or similar
- 7 Canon Adapter EF-RF 0.71x
- 8 HPRC1300MEMBLB
- 9 CA-CP200L
- 10 Miscellaneous
- 11 Battery Charger CG-A20 OTH
- 12 Handle unit



HPRC CANON EOS C70


TECHNICAL FEATURES

Dimension:
internal dimension
482,4x358,3x198,1(mm) - 18.99x14.1x7.8(in)
external dimension
543,4x426,8x218,1(mm) - 21.39x16.8x8.59(in)

Weight:
empty: 4,25kg - 9.37lbs
with cubed foam: 5,05kg - 11.13lbs

Temperature rating:
Minimum -40°C -40°F
Maximum +80°C +176°F

TECHNICAL DRAWING

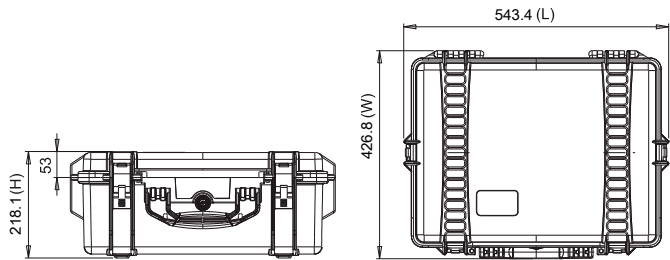




MOZA

HPRC READY MADE SOLUTIONS – 2025

HPRC2530 for Moza Air2 Ifocus

S-MAIR2-2530-01

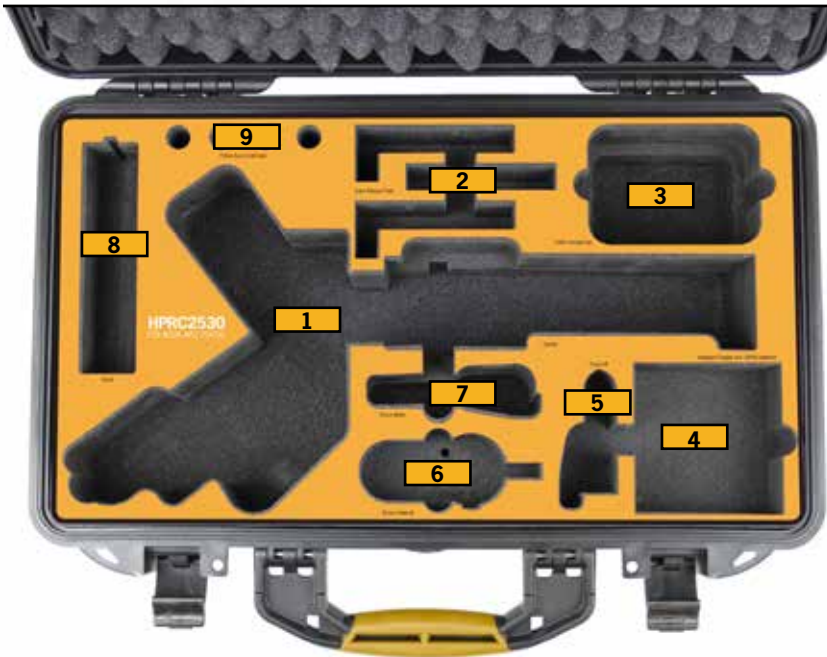

- 1 Gimbal
- 2 Quick Release Plate
- 3 Cable storage bag
- 4 Intelligent Charger and 18650 batteries
- 5 IFocus M
- 6 IFocus Handunit
- 7 Ifocus Motor
- 8 Tripod
- 9 Follow focus install pipe



TECHNICAL FEATURES


Dimension:
internal dimension 513x288x132(mm) - 20.20x11.34x5.20(in)
external dimension 540x350x153(mm) - 21.26x13.78x6.02(in)

Weight:
empty: 3,20kg - 7.05lbs
with cubed foam: 3,26kg - 7.19lbs

Temperature rating:
Minimum -40°C -40°F
Maximum +80°C +176°F



TECHNICAL DRAWING

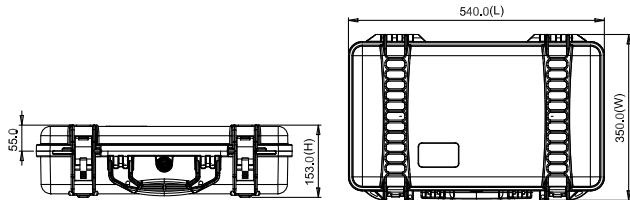




ZHIYUN CRANE

HPRC READY MADE SOLUTIONS – 2025

HPRC2700W for Zhiyun Crane 3 Lab
Master package
S-CR3-2700W-01

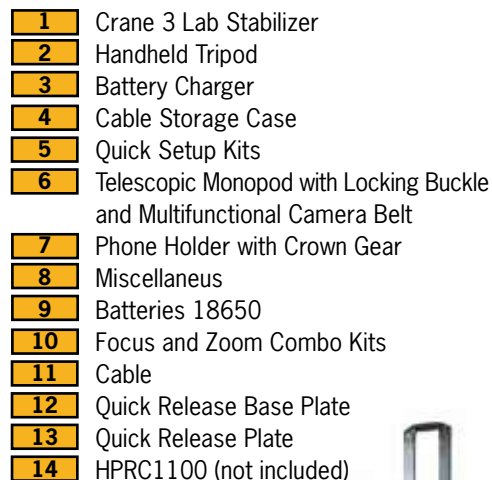

TECHNICAL FEATURES

Internal dimension
554,7x458,7x246(mm) - 21.84x18.06x9.69(in)
External dimension
617,5x527,3x279,6(mm) - 24.31x20.76x11.0(in)

empty: 7,74kg - 17.06lbs
with cubed foam: 8,84kg - 19.49lbs

Minimum	Maximum
-40°C -40°F	+80°C +176°F



HPRC2600W for Zhiyun Crane 3 Lab S-CR3-2600W-01



- 1 Crane 3 Lab Stabilizer
- 2 TransMount Handheld Tripod
- 3 Battery Charger
- 4 Batteries 18650
- 5 Cable Storage Case
- 6 Quick Release Plate
- 7 TransMount Phone Holder



TECHNICAL FEATURES

Dimension:

Internal dimension
482,4x358,3x217,6(mm) - 18.99x14.1x8.57(in)

External dimension
546,9x426,8x250,7(mm) - 21.53x16.8x9.87(in)

Weight:


empty: 6,05kg - 13.34lbs
with cubed foam: 6,97kg - 15.37lbs

Temperature rating:

Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

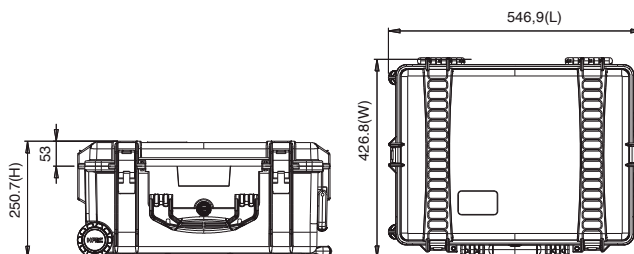





FUJIFILM

HPRC READY MADE SOLUTIONS – 2025

HPRC2500 for Fujifilm GFX100 S-GFX100-2500-01



- 1 Fujifilm GFX100
- 2 Cable storage/Miscellaneous
- 3 Adjustable lens: FUJIFILM GF 110mm f/2 R LM WR Lens, 23mm f/4 R LM WR Lens, 45mm f/2.8 R WR Lens, 32-64mm f/4 R LM WR Lens
- 4 Battery charger
- 5 Battery NP-T125
- 6 Ac Power Adapter



HPRC FUJIFILM GFX100

TECHNICAL FEATURES


Dimension:
 internal dimension
 449,8x322,9x174,9(mm) - 17.71x12.71x6.89(in)
 external dimension
 478,1x389,4x194(mm) - 18.82x15.33x7.64(in)

Weight:
 empty: 3,22kg - 7.10lbs
 with cubed foam: 3,75kg - 8.27lbs

Temperature rating:
 Minimum Maximum
 -40°C -40°F +80°C +176°F



TECHNICAL DRAWING

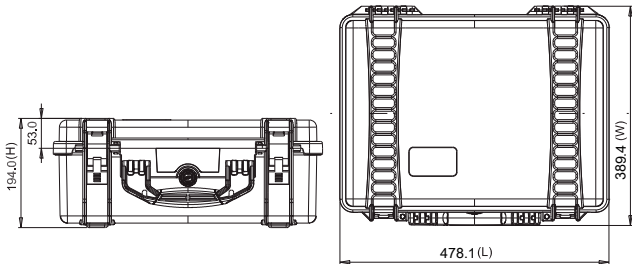




RED

HPRC READY MADE SOLUTIONS – 2025

HPRC2730W for Red Ranger Gemini S-RGE-2730W-01

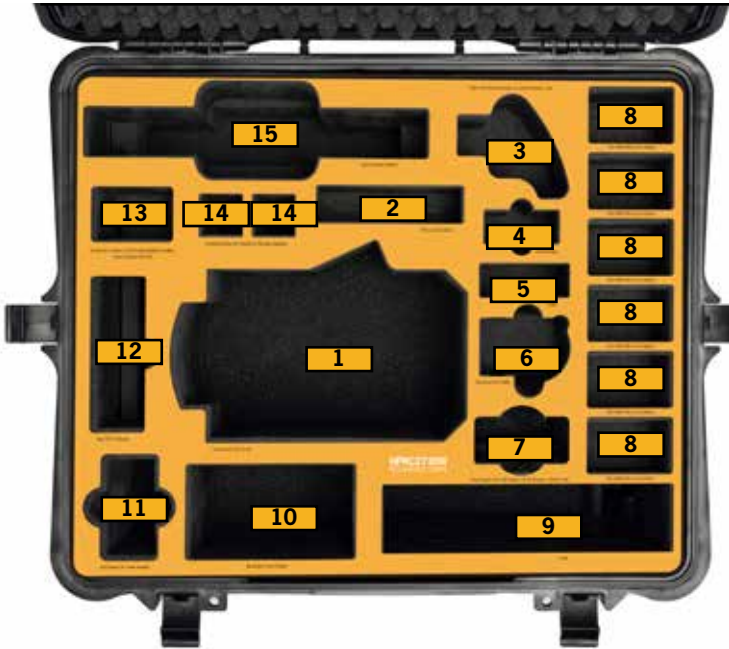

- 1 Camera with Top Handle
- 2 HPRC1300 MEVBLB
- 3 Right Side Wooden Handle 2.0 with R/S Button - Tilta
- 4 Red Mini Mag
- 5 Cable
- 6 Red Bomb EVF DSMC
- 7 Titan Support Arm with Single 1/4" QR Bracket – Monitor Side
- 8 GDU 98Wh Mini V-Lock Battery
- 9 Cable
- 10 BlueShape Travel Charger
- 11 Red Ranger Ac Power Adaptor
- 12 DSMC2 Red Touch 7.0" LCD
- 13 Smallrig for monitor LCD EVF Mount/BMVA/SmallHD, Zacuto Gratical HD1938
- 14 Smallrig Rosette Arm Handle for Shoulder Stabilizer
- 15 Quick Release Platform



HPRC RED RANGER GEMINI

TECHNICAL FEATURES


Dimension:
 internal dimension
 503x459x316(mm) - 19.80x18.07x12.44(in)
 external dimension
 616,9x531x349,6(mm) - 24.29x20.91x13.76(in)

Weight:
 empty: 8,41kg - 18.54lbs
 with cubed foam: 10,43kg - 22.99lbs

Temperature rating:
 Minimum Maximum
 -40°C -40°F +80°C +176°F



TECHNICAL DRAWING

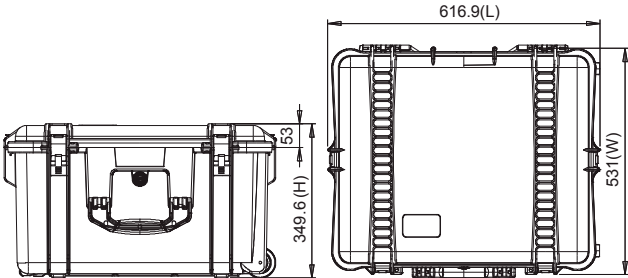



PANASONIC

HPRC READY MADE SOLUTIONS – 2025

HPRC2460 for Panasonic GH5 S-GH52460-01




- 1** PANASONIC GH5 with or without professional cage and lenses mounted
- 2** Lenses: lumix g 8mm f3,5 (fisheye) hd, lumix dg summilux 12 f1.4, lumix g pancake 14mm f2.5, leica dg summilux 15mm /f1,7 asph, lumix g 20mm f1,7 (asph), leica dg summilux 25mm f1,4 (asph), lumix g 25mm f1.7 asph., lumix g 30mm macro f2,8, leica dg nocticron 42,5 mm f 1,2 (asph) hd, lumix g dg 1,7 / 42,5mm asph/power o.i.s., leica dg macro-elmarit 45mm f2,8 (asph), lumix g vario 7-14mm f4,0 (asph) hd, leica dg vario elmarit 8-18, lumix g vario 12-32mm f3.5-f5.6 (asph) hd, lumix g x vario 12-35mm f2,8 (asph) hd, lumix g x vario 12-35 ii, leica dg vario elmarit 12-60, lumix g vario 12-60, lumix g vario 14-42mm f3,5-5,6 (asph) hd, lumix g vario 14-42mm f3,5-5,6 (asph) hd, lumix g x vario pz 14-42mm f3,5-5,6 (asph), lumix g vario 14-42mm f3,5-5,6 (asph) hd, lumix g x vario pz 14-42mm f3,5-5,6 (asph), lumix g vario 14-45mm f3,5-5,6 (asph) hd, lumix g x vario 35-100mm f2,8 hd, lumix g x vario 35-100 ii, lumix g vario 35-100mm f4,0-5,6, lumix g vario 45-200 ii, lumix g 12,5mm f12,5 3d
- 3** Battery chargers, cables
- 4** Accessories (baseplate, rods, top grip handles, lockports, cables, batteries, controllers, GoPro)
- 5** External recorder Atomos/Sound Device etc

TECHNICAL FEATURES

Dimension: internal dimension 409x306x175(mm) - 16.1x12.05x6.89(in) external dimension 435x377,8x193(mm) - 17.13x14.87x7.60(in)	
Weight: empty: 2,55kg - 5.62lbs with cubed foam: 3,14kg - 6.92lbs	
Temperature rating: Minimum -40°C -40°F Maximum +80°C +176°F	

TECHNICAL DRAWING

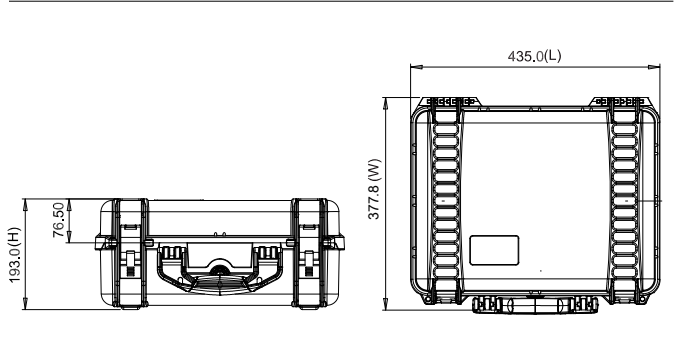

HPRC PANASONIC GH5



LEICA

Leica

LEICA

HPRC READY MADE SOLUTIONS - 2025

HPRC2400 for Leica M

S-LEM2400-01



- 1 1 x Leica M Camera Body with Lens Attached
- 2 Electronic Viewfinder
- 3 4 x Lens
- 4 Charger
- 5 Spare Battery
- 6 Cables/Miscellaneous

TECHNICAL FEATURES


Dimension:
Internal dimension
377x263,9x150,8(mm) - 14,84x10,39x5,94(in)
External dimension
402X330,5X169,2(mm) - 15.83x13.01x6.66(in)

Weight:
empty: 2,38kg - 5.25lbs

Temperature rating:
Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

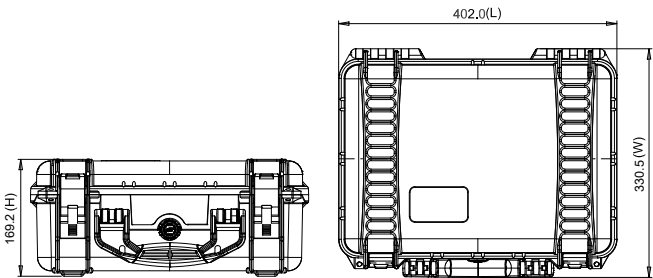

HPRC2460 for Leica M S-LEM2460-01



FOR LEICA M



- 1 2 x Leica M Camera Body with Lens Attached
- 2 2 x Electronic Viewfinder
- 3 2 x Spare Batteries
- 4 4 x Lens
- 5 2 x Charger
- 6 Cables/Miscellaneous

TECHNICAL FEATURES

Dimension:

internal dimension
 409x306x175(mm) - 16.1x12.05x6.89(in)
 external dimension
 435x377,8x193(mm) - 17.13x14.87x7.60(in)

Weight:


empty: 2,55kg - 5.62lbs
 with cubed foam: 3,14kg - 6.92lbs

Temperature rating:

Minimum Maximum
 -40°C -40°F +80°C +176°F



TECHNICAL DRAWING

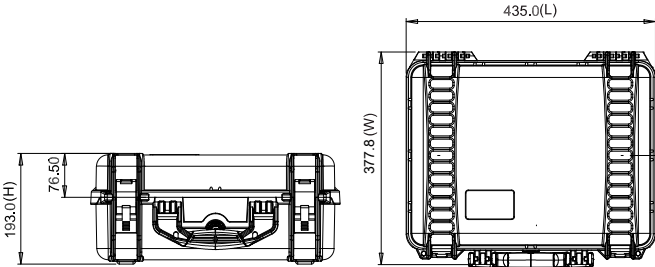



9 11 16 8 11 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100






APPLE



HPRC READY MADE SOLUTIONS — 2025

HPRC2530 for Apple Mac Studio / Mac Mini

S-STU-2530-01

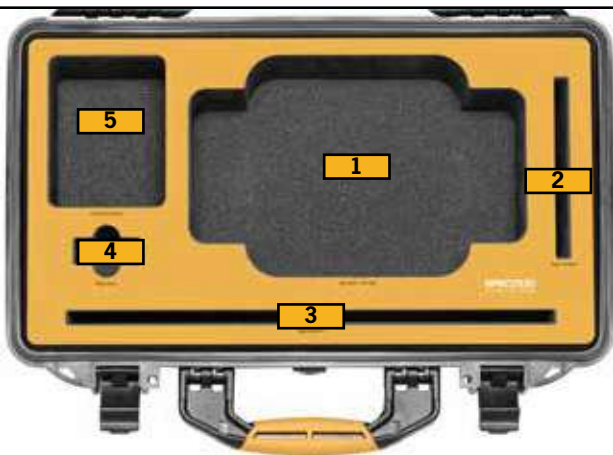

- 1 Mac Studio / Mac Mini
- 2 Magic Trackpad
- 3 Magic Keyboard
- 4 Magic Mouse
- 5 Cable/Miscellaneous



MAC STUDIO LAYOUT



MAC MINI LAYOUT



TECHNICAL FEATURES


Dimension:
Internal dimension:
513x288x132(mm) - 20.20x11.34x5.20(in)
External dimension:
540x350x153(mm) - 21.26x13.78x6.02(in)

Weight:
empty: 3,20kg - 7.05lbs
with cubed foam: 3,26kg - 7.19lbs

Temperature rating:
Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

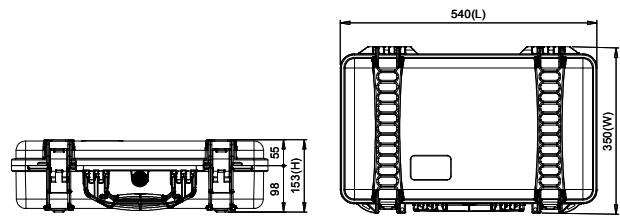

HPRC APPLE MAC STUDIO / MAC MINI

HPRC4800W for Apple Mac Pro

S-MPRO-4800W-01



- 1 Mac Pro
- 2 Miscellaneous
- 3 Power cord
- 4 USB-C to Lightning Cable
- 5 Magic Mouse 2
- 6 Magic Keyboard



TECHNICAL FEATURES


Dimension:
internal dimension
720x320x600(mm) - 28.34x12.60x23.62(in)
external dimension
776x380x649(mm) - 30.55x14.96x25.55(in)

Weight:
empty: 10,00kg - 22.21lbs
with cubed foam: 14,10kg - 31.08lbs

Temperature rating:
Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

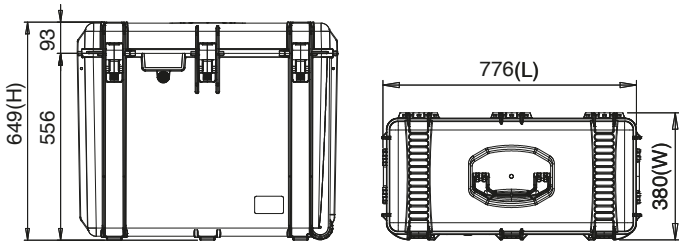






EIZO

HPDC READY MADE SOLUTIONS – 2025

HPRC4800W for Eizo 27"/24" S-EIZ27-4800W-01

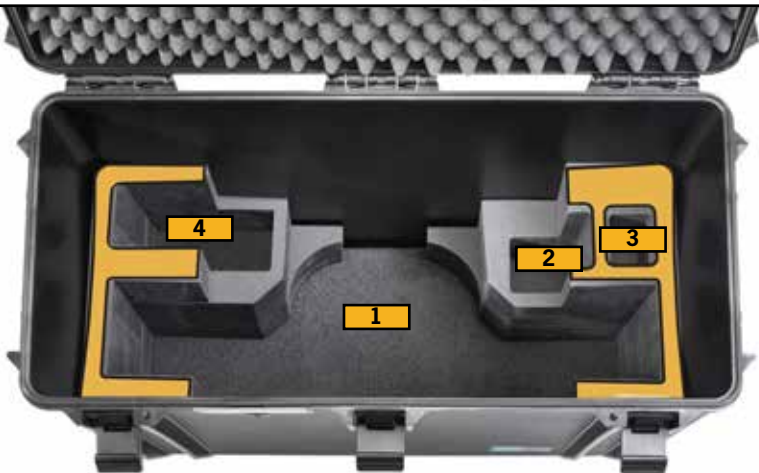

- 1 Eizo Monitor 27" or 24"
- 2 Cables and accessories
- 3 Cables and accessories
- 4 Protective hood and accessories



HPRC EIZO 27/24"

TECHNICAL FEATURES

Dimension:

internal dimension
720x320x600(mm) - 28.34x12.60x23.62(in)
external dimension
776x380x649(mm) - 30.55x14.96x25.55(in)

Weight:


empty: 11,12kg - 24.50lbs
with cubed foam: 12,43kg - 27.40lbs

Temperature rating:

Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

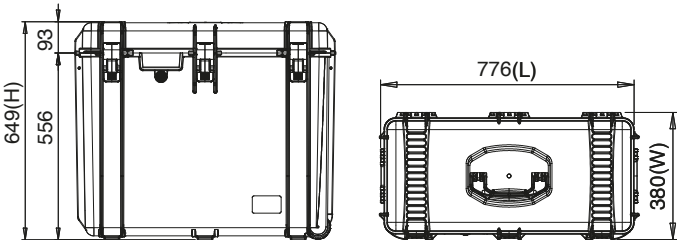



UNIVERSAL MICROPHONES

HPRC READY MADE SOLUTIONS – 2025

HPRC2200 for 3 Universal Microphones S-MCF3-2200-01



1 Universal Microphone



TECHNICAL FEATURES


Dimension:
 internal dimension
 236x182x108(mm) - 9.29x7.17x4.25(in)
 external dimension
 258x244,3x123,3(mm) - 10.16x9.62x4.85(in)

Weight:
 empty: 0,87kg - 1.92lbs
 with cubed foam: 1,08kg - 2.38lbs

Temperature rating:
 Minimum Maximum
 -40°C -40°F +80°C +176°F



TECHNICAL DRAWING

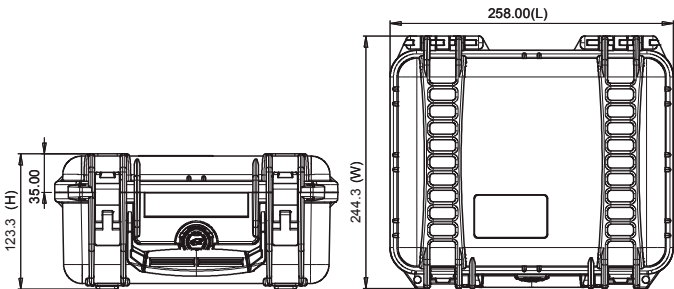

HPRC2250 for 6 Universal Microphones S-MCF6-2250-01



LEVEL 1

LEVEL 2



1 Universal Microphone



TECHNICAL FEATURES


Dimension:
 internal dimension
 236x182x155(mm) - 9.29x7.17x6.10(in)
 external dimension
 258X230X170(mm) - 10.16x9.06x6.69(in)

Weight:
 empty: 1,00kg - 2.20lbs
 with cubed foam: 1,35kg - 2.97lbs

Temperature rating:
 Minimum Maximum
 -40°C -40°F +80°C +176°F



TECHNICAL DRAWING

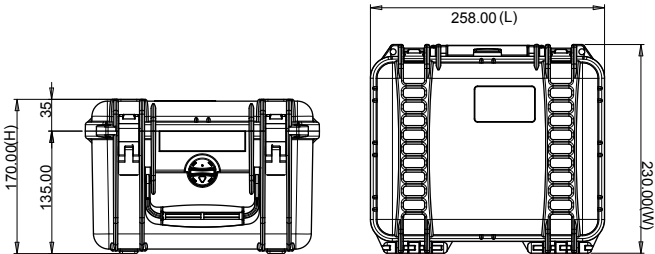



I




BROMPTON

BROMPTON

HPRC READY MADE SOLUTIONS – 2025

HPRC4800W for Brompton S-BRO4800W-01

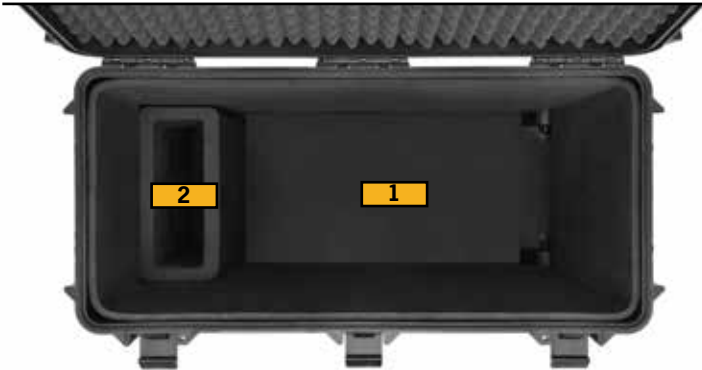

- 1 Brompton Bike
- 2 Accessories

NOT suitable for G-Line



TECHNICAL FEATURES


Dimension:
 Internal dimension:
 720x320x600(mm) - 28.34x12.60x23.62(in)
 External dimension:
 776x380x649(mm) - 30.55x14.96x25.55(in)

Weight:
 10kg - 22.21lbs

Temperature rating:
 Minimum Maximum
 -40°C -40°F +80°C +176°F



TECHNICAL DRAWING

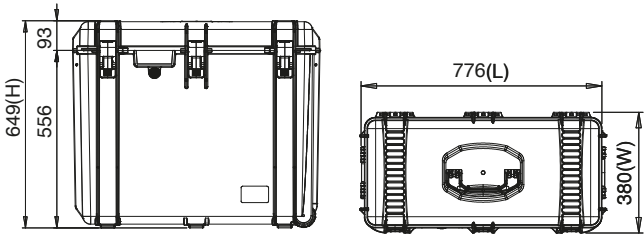

code	description	page
	DJI	4
S-MAV4P-2460-01	HPRC2460 FOR DJI MAVIC 4 PRO CREATOR COMBO	5
S-MAV3P-2400-02	HPRC2400 FOR DJI MAVIC 3 PRO CINE PREMIUM COMBO / FLY MORE COMBO	6
S-MAV3PFM-2600-01	HPRC2600 FOR DJI MAVIC 3 PRO CINE PREMIUM COMBO FLYING MODE & DJI MINI 4 PRO FLY MORE COMBO	7
S-MAV3P-3500-01	HPRC3500 FOR DJI MAVIC 3 PRO CINE PREMIUM COMBO / FLY MORE COMBO	8
S-MAV3PBAG35	HPRC SOFT BAG FOR DJI MAVIC 3 PRO CINE PREMIUM COMBO / FLY MORE COMBO	9
S-MAV3-2400-01	HPRC2400 FOR DJI MAVIC 3 CINE OR DJI MAVIC 3 OR DJI MAVIC 3 CLASSIC	10
S-MAV3-3500-01	HPRC3500 FOR DJI MAVIC 3 CINE OR DJI MAVIC 3 OR DJI MAVIC 3 CLASSIC	11
S-MAVBAG35-05	HPRC SOFT BAG FOR DJI MAVIC 3 CINE OR DJI MAVIC 3	12
S-M350-2800W-03	HPRC2800W FOR DJI MATRICE 350 RTK (ZENMUSE L2 & ZENMUSE H30/H30T VERSION)	13
S-M300-2800W-04	HPRC2800W FOR DJI MATRICE 300 RTK (ZENMUSE H30/H30T VERSION)	14
S-BAT2550W-04	HPRC2550W BATTERY CASE FOR DJI MATRICE 300/350	15
S-DRTK3-6500W-01	HPRC6500W FOR DJI D-RTK3	16
S-M4ET-2500-01	HPRC2500 FOR DJI MATRICE 4E/4T	17
S-M4TD-2710-01	HPRC2710 FOR DJI MATRICE 4D/4TD	18
S-M3TD-2710-01	HPRC2710 FOR DJI MATRICE 3D/3TD	19
S-M30T-5200R-01	HPRC5200R FOR DJI MATRICE 30T	20
S-M30T-2760W-01	HPRC2760W FOR DJI MATRICE 30T	21
S-RCP-2500-02	HPRC2500 FOR DJI RC PLUS 2 / PLUS CONTROLLERS AND WB37 BATTERIES	22
S-INS3-2800W-01	HPRC2800W FOR DJI INSPIRE 3	23
S-BAT2550W-05	HPRC2550W FOR DJI INSPIRE 3 BATTERIES	24
S-MAVM-2300-04	HPRC2300 FOR DJI MINI 4 PRO FLY MORE COMBO WITH SMART CONTROLLER	25
S-FLIP-2300-01	HPRC2300 FOR DJI FLIP FLY MORE COMBO	26
S-NEO-2300-01	HPRC2300 FOR DJI NEO FLY MORE COMBO	27
S-MAV3A-2400-02	HPRC2400 FOR DJI AIR 3 & AIR 3S FLY MORE COMBO	28
S-MAV3A-3500-01	HPRC3500 FOR DJI AIR 3 & AIR 3S FLY MORE COMBO	29
S-AVAT2-3500-01	HPRC3500 FOR DJI AVATA 2 FLY MORE COMBO	30
S-AVAT-3500-01	HPRC3500 FOR DJI AVATA PRO - VIEW COMBO	32
S-FPV-2500-01	HPRC2500 FOR DJI FPV COMBO	33
S-FPV-3600-01	HPRC3600 FOR DJI FPV COMBO	34
S-PHA4RTK-2700W-01	HPRC2700W FOR DJI PHANTOM 4RTK / MULTISPECTRAL	35
S-R4D-2730W-01	HPRC2730W FOR DJI RONIN 4D-6K COMBO	36
S-RS4-2600-01	HPRC2600 FOR DJI RS 4 PRO COMBO	37
S-RS3-2600-01	HPRC2600 FOR DJI RS 3 PRO COMBO	38
S-RS3M-2300-01	HPRC2300 FOR DJI RS 3 MINI CREATOR COMBO	39
S-OSMPKT-1400-02	HPRC1400 FOR DJI POCKET 2 CREATIVE COMBO KIT	40
S-OSMPKT-1400-03	HPRC1400 FOR DJI OSMO POCKET 3 CREATOR COMBO	41

code	description	page
	AUTEL ROBOTICS	42
S-LITE-2460-01	HPRC2460 FOR AUTEL ROBOTICS EVO LITE + PREMIUM BUNDLE	43
S-NANO-2300-01	HPRC2300 FOR AUTEL ROBOTICS EVO NANO + PREMIUM BUNDLE	44
S-EV02-2400-02	HPRC2400 FOR AUTEL ROBOTICS EVO II 6K / 8K DRONE	45
	ATOMOS	46
S-NJAV-2300-01	HPRC2300 FOR ATOMOS NINJA ULTRA, NINJA OR NINJA V	47
S-SHGC-2400-01	HPRC2400 FOR ATOMOS SHOGUN, SHOGUN ULTRA AND SHOGUN CONNECT	48
S-SM19-2730W-01	HPRC2730W FOR ATOMOS SUMO 19"	49
	BLACKMAGIC	50
S-PKT6P-2400-01	HPRC2400 FOR BLACKMAGIC POCKET CINEMA CAMERA 6K PRO OR BLACKMAGIC CINEMA CAMERA 6K	51
S-PKTC-2400-01	HPRC2400 COMBO FOR BLACKMAGIC POCKET CINEMA CAMERA 6K OR 4K + METABONES	52
S-BMS-5200-01	HPRC5200 FOR BLACKMAGIC STUDIO CAMERA 6K PRO / 4K PRO G2 /4K PLUS	53
S-ATS-2760W-01	HPRC2760W FOR BLACKMAGIC DESIGN ATEM TELEVISION STUDIO 4K8/HD8/HD8 ISO + ATEM MICROPHONE CONVERTER	54
S-UG2-2760W-01	HPRC2760W FOR URSA BROADCAST G2	55
S-ACCP-2710-01	HPRC2710 FOR BLACKMAGIC DESIGN ATEM CAMERA CONTROL PANEL	56
S-AME-2500-01	HPRC2500 FOR ATEM MINI EXTREME AND ATEM MINI EXTREME ISO	57
S-ADV1-2710-01	HPRC2710 FOR BLACKMAGIC DESIGN ATEM 1 M/E ADVANCED PANEL	58
S-URS2730W-03	HPRC2730W FOR BLACKMAGIC URSA MINI PRO - URSA BROADCAST	59
	SONY	60
S-FX3-2400-01	HPRC2400 FOR SONY FX3 CINEMA LINE	61
S-FX6-2550W-01	HPRC2550W FOR SONY ILME - FX6 - CINEMA LINE	62
S-FX9-2700W-01	HPRC2700W FOR SONY PXW - FX9 - CINEMA LINE	63
S-BRN-2700W-01	HPRC2700W FOR SONY BURANO 8K CAMERA - CINEMA LINE	64
S-Z280-2600W-01	HPRC2600W FOR SONY PXW - Z280	65
S-Z190-2700W-01	HPRC2700W FOR SONY PXW - Z190V	67
	CANON	68
S-C80-2500-01	HPRC2500 FOR CANON EOS C80	69
S-C400-2700W-01	HPRC2700W FOR CANON EOS C400	70
S-C300-2700W-01	HPRC2700W FOR CANON EOS C300 MARK III	71
S-C70-2600-01	HPRC2600 FOR CANON EOS C70	73
	MOZA	74
S-MAIR2-2530-01	HPRC2530 FOR MOZA AIR2 IFOCUS	75
	ZHIYUN CRANE	76
S-CR3-2700W-01	HPRC2700W FOR ZHIYUN CRANE 3 LAB MASTER PACKAGE	77
S-CR3-2600W-01	HPRC2600W FOR ZHIYUN CRANE 3 LAB	78

Index

code	description	page
	FUJIFILM	80
S-GFX100-2500-01	HPRC2500 FOR FUJIFILM GFX100	81
	RED	82
S-RGE-2730W-01	HPRC2730W FOR RED RANGER GEMINI	83
	PANASONIC	84
S-GH52460-01	HPRC2460 SPECIAL EDITION FOR PANASONIC GH5 AND ACCESSORIES	85
	LEICA	86
S-LEM-2400-01	HPRC2400 FOR LEICA M	87
S-LEM-2460-01	HPRC2460 FOR LEICA M	88
	APPLE	90
S-STU-2530-01	HPRC2530 FOR APPLE MAC STUDIO / MAC MINI	91
S-MPRO-4800W-01	HPRC4800W FOR APPLE MACPRO 2020	92
	EIZO	94
S-EIZ27-4800W-01	HPRC4800W FOR EIZO MONITOR 27" OR EIZO MONITOR 24"	95
	UNIVERSAL MICROPHONES	96
S-MCF3-2200-01	HPRC2200 FOR 3 UNIVERSAL MICROPHONES	97
S-MCF6-2250-01	HPRC2250 FOR 6 UNIVERSAL MICROPHONES	98
	BROMPTON	100
S-BR04800W-01	HPRC4800W FOR BROMPTON FOLDING BIKE	101

H READY





 2600W
HPRC





Plaber S.r.l. - HPRC cases

Via Div. Tridentina, 10
36061 Bassano del Grappa
Vicenza - Italy

Tel. +39 0424 809150

USA office and warehouse:

Plaber America Inc - HPRC cases

110 Chestnut Ridge Rd. #314
Montvale, NJ 07645

Tel. +1 (201) 989 3353

www.hprc.it | www.hprcusa.com

info@hprc.it

HPRC® Brand owned by:

plaber

HPRC READY MADE SOLUTIONS – 2025